





Open Field Network CC-Link Family Compatible Product Development Guidebook



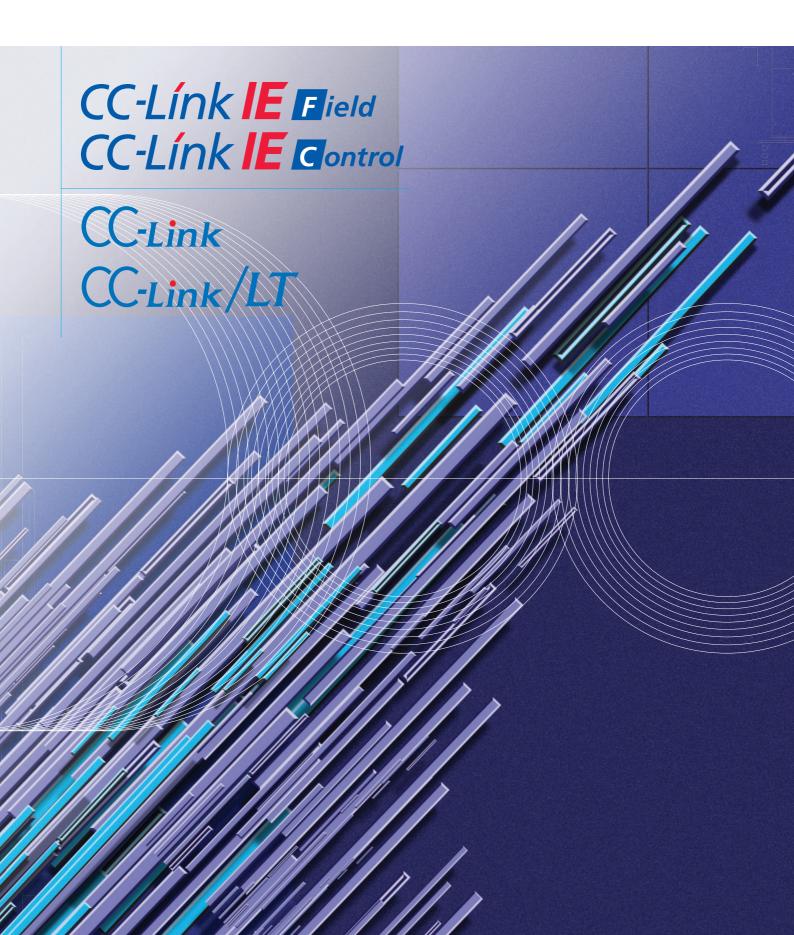

From consulting to the provision of development tools, Mitsubishi Electric is ready to assist you in speedy development of **CC-Link Family compatible products.**

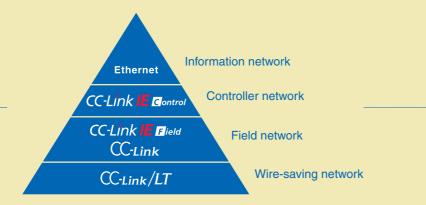

Making your products compatible with CC-Link Family, an open field network originating from Japan, will not only ensure the level of system flexibility distinctively characteristic of multi-vendor products but also provide you with the opportunity to boost the competitiveness of your products to the global level once and for all.

With various certifications, including International Organization for Standardization ISO 15745-5*1, IEC 61158 and IEC 61784*2, SEMI*3, Chinese National Standards GB*4, Korean Industrial Standards KS*5, and Japanese Industrial Standards JIS*6, CC-Link has lived up to its name as a global standard. To ensure quick and certain development of CC-Link family compatible products, such as new generation CC-Link IE Control network and CC-Link IE Field network, Mitsubishi Electric will support you in every phase of development, including the provision of development tools.



- *1. "Application Integration Framework"
- *2. Industrial Field bus protocol standard
- *3. SEMI E54.12 E54.23-0513
- *4. GB/T 19760 20299.4
- *5. KSBISO15745-5
- *6. JIS TR B0031

INDEX

	B 1	er i i	DOG .	-
Development	Procedure	Flowchart ·····	P03 to	o PU4

CC-Link Family Configuration -- P05

Development Method Selection Flowchart ··· P06 to P08

Station Development Guides

[CC-Link IE Control]

O Driver Development ······ P09 to P10

[CC-Link IE Field]

- Master Station P11 to P12
- O Intelligent Device Station P13 to P14
- O Driver Development P15 to P16

[CC-Link]

- Master Station, Local Station and Intelligent Device Station P17 to P20
- Remote Device Station ---- P21 to P22
- O Remote I/O Station ----- P23 to P26
- O Driver Development P27 to P28

[CC-Link/LT]

- O Master Station P29 to P30
- O Remote Device Station --- P31 to P32
- O Remote I/O Station ---- P33 to P34

Recommended Parts and Specified Parts -- P35 to P37

Technical Information----P39 to P45

Support System P46

Related Product List P47

Warranty P48

Expanding business with CC-

Recommended path to CC-Link Family compatible product development

Mitsubishi Electric

Inquiries & Consulting

Mitsubishi Electric will provide product development consultation free of charge. Our Open System Center welcomes the opportunity to discuss the various development methods available and the related requirements.

[Contact]

Please contact one of the CC-Link Partner Association sites indicated on P. 46. The site will contact the Mitsubishi Electric Nagova Works Open System Center.

Purchasing Reference Manuals

To purchase reference manuals, contact a Mitsubishi representative office or distributor of the device or product.

Purchasing Development Tools

To purchase products such as a dedicated communication LSI or built-in interface board specifically required for the development method, contact a Mitsubishi representative office or distributor of the device or product.

Customer

Development method selection

Development study

Design and development

Purchasing of specified parts, etc.

C L P

D

Joining the CC-Link Partnership Association

In order to develop and sell CC-Link compatible products, you will need to join the CC-Link Partner Association as a regular member, executive member or board member.

[Contact]

Please contact one of the CC-Link Partner Association sites indicated on P. 46.

Procurement of conformance test specifications

"Conformance Test Specifications" can be downloaded from CLPA to use when performing conformance tests on developed products.

Procurement of CSP + Reference/Related Tools


"CSP+ Creation Guidelines", "CSP+ Specifications" and "CSP+ Support Tools" can be downloaded from CLPA for use when creating CSP+.

The strongest theme in CC-Link Family compatible product development is the simultaneous pursuit of quality and development speed. This includes the development of dedicated communication LSIs, which requires from the initial stages extreme efficiency with respect to both cost and speed. Mitsubishi Electric prepares development tools, including those for each type of dedicated communication LSI and built-in module, through our comprehensive CC-Link IE, CC-Link, & CC-Link/LT related technologies cultivated to date, and is pleased to offer its support in the development of efficient compatible products. Capable of highly detailed assistance, from consulting during the preparation stage to problem solving during development, Mitsubishi Electric and the CC-Link Partner Association (CLPA) are eager to serve you as your partners.

* CSP+: CC-Link Family System Profile

in all

Link Family.

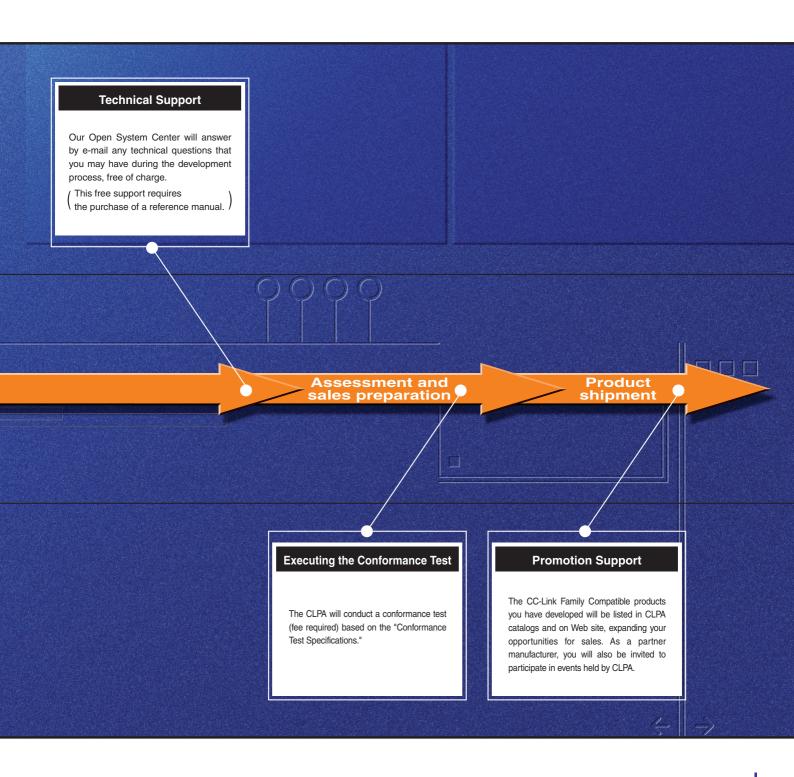


areas of development, Mitsubishi Electric offers you solid support.

Progressing of CC-Link Family.


The CC-Link family continually progresses, responding to the various needs of industrial networks.

From Ethernet-based controller networks to field networks and cabinet interior wire-saving networks, the CC-Link family has openly increased its industrial networkability.

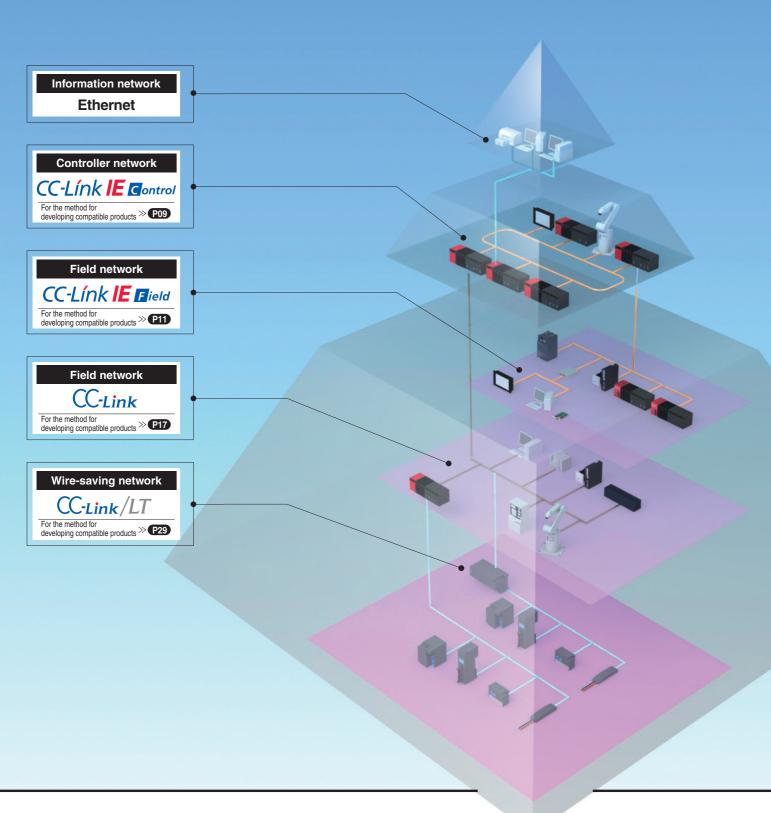


Ethernet & Gigabit.

Mitsubishi Electric supports speedy development of Ethernet-based integrated network CC-Link IE compatible products.

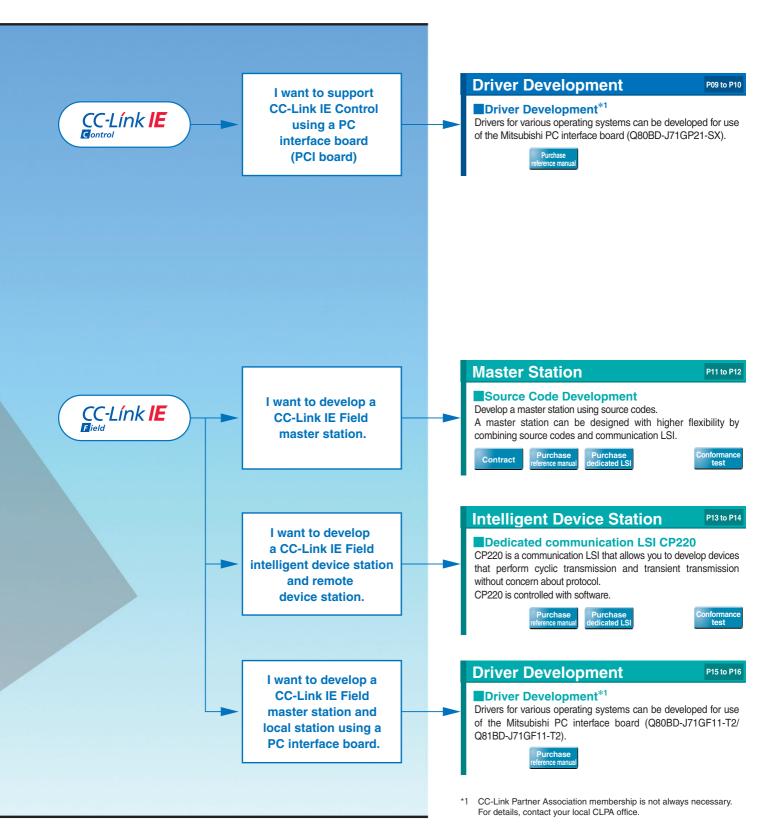

It's Easy & Speedy.

Mitsubishi Electric provides development methods tailored to the CC-

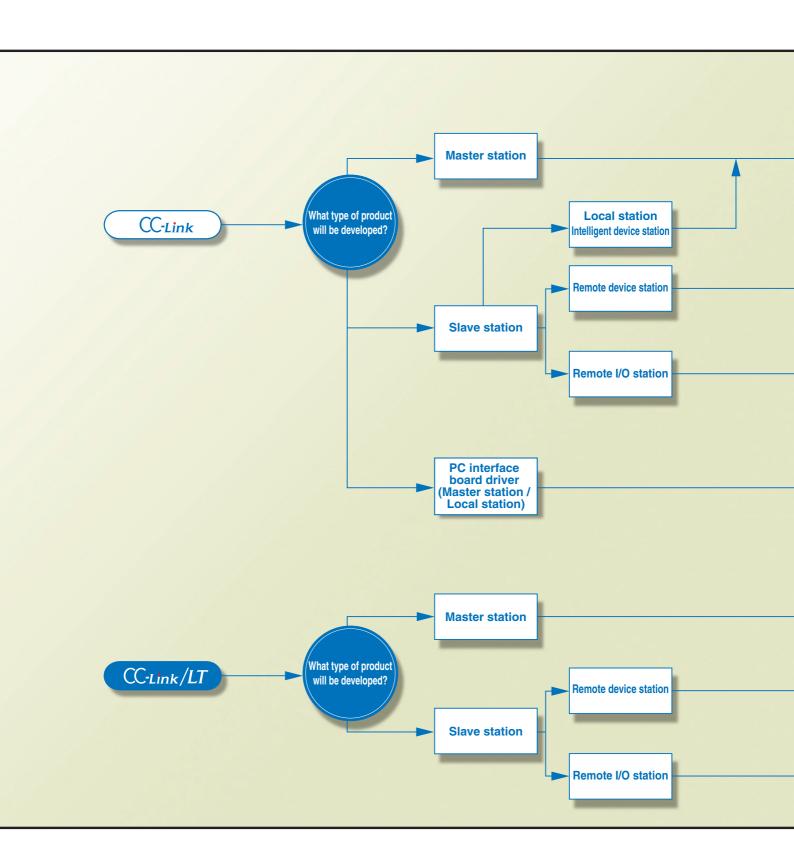

Link & CC-Link/LT compatible product type.

CC-Link

Master Station, Local Station, Intelligent Device Station

P17 to P20

■ Built-in interface board Q50BD-CCV2

In this method, stations are developed using a built-in interface board. The CC-Link master station, local station and intelligent device station functions are realized by mounting the interface board on a user circuit board.





Object development

In this method, stations are developed using the object code and the device kit. By developing with object codes, a design with higher flexibility can be achieved compared to using the built-in interface board.











P21 to P22

Remote Device Station

Dedicated communication LSI MFP3N

MFP3N is a communication LSI that allows you to develop devices that handle bit data and word data without concern about protocol. MFP3N is controlled with software. Support of both CC-Link Ver. 1 and Ver. 2 is possible by changing the software.









Remote I/O Station

P23 to P2

■ Dedicated communication LSI MFP2N/MFP2AN

MFP2N and MFP2AN are communication LSIs that allow you to develop devices that handle bit data without concern about protocol. The two types are provided for different package sizes (number of pins) and I/O point quantity.









■ Embedded I/O Adapter*1*2

This small-sized Embedded adapter allows you to develop devices that handle bit data without concern about protocol. The adapter can be mounted directly on the circuit board you developed, and allows expansion of the number of I/O points through cascade connection. (A maximum of two adapters can be mounted on a single circuit.)





Driver Development

P27 to P28

Driver development*1

Drivers for various operating systems can be developed for use of the Mitsubishi PC interface board (Q80BD-J61BT11N).



CC-Link/LT

Master Station

P29 to P

■ Dedicated communication LSI CLC13

CLC13 is a communication LSI that allows you to develop devices compliant with the master station used for network management. The network can be constructed by connecting the various slave stations.









Remote Device Station

P31 to P32

■ Dedicated communication LSI CLC31

CLC31 is a communication LSI that allows you to develop devices that handle CC-Link/LT word data (16-bit data). The data amount of four words can be handled by a single LSI, allowing development of analog I/O and other remote device stations.









Remote I/O Station

P33 to P34

■ Dedicated communication LSI CLC21

CLC21 is a communication LSI that allows you to develop devices that handle bit data without concern about protocol. This LSI enables development of digital I/O and other remote I/O stations.









^{*1.} CC-Link Partner Association membership is not always necessary. For details, contact your local CLPA office.

^{*2.} The conformance test is sometimes not required. For details, contact your local CLPA office.




Developing Drivers for the Various Operating Systems of CC-Link IE Control Network PC Interface Board



Q80BD-J71GP21-SX Driver Development



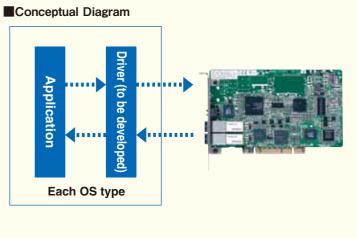

- 1. Developing a driver for the various operating systems enables use of the CC-Link IE Control Network compatible PC interface board as a control station or normal station.
- 2. The CC-Link IE Control Network Q80BD-J71GP21 Driver Development Reference Manual helps you develop a PC interface board Q80BD-J71GP21-SX driver compatible with the various operating systems.
- 3. The reference manual describes the hardware information (PCI configuration area, 2-port memory area, and hardware control memory area memory map) and software information (driver initialization procedure and parameter setup procedure) required for driver development.
- 4. This reference manual includes sample programs (C language), making it possible to reduce development costs and shorten development man-hours.
- •Upon request, software development partners are introduced.

Title	Manual No.
CC-Link IE Q80BD-J71GP21-SX Driver Development Reference Manual	SH(NA)-080819ENG



CC-Link IE Control Network PC Interface Board

Q80BD-J71GP21-SX/Q80BD-J71GP21S-SX, Q81BD-J71GP21-SX/Q81BD-J71GP21S-SX

- 1. The interface board allows you to incorporate personal computers into the CC-Link IE Control Network.
 - The interface board allows you to use a personal computer as a control station or normal station within a CC-Link IE Control Network when mounted.
- 2. The interface board enables simple parameter setup. Using the CC IE Control utility enables simple setup of the parameters required for CC-Link IE Control Network operation.
- 3. The interface board displays test information and monitor information related to the CC-Link IE Control Network system.
 - The interface board enables simple display of CC-Link IE Control Network system related test and monitor status information on the personal computer.
- 4. The interface board offers RCPU and QCPU multiple CPU system compatibility.

The interface board enables communication with each CPU of a multiple CPU system via specification of logical station numbers using the CC IE Control utility.





■Q81BD-J71GP1-SX



■ Specifications

Item	Q80BD-J71GP21-SX Q80BD-J71GP21S-SX	Q81BD-J71GP21-SX Q81BD-J71GP21S-SX
Station type	Control station	or normal station
Number of boards that can be installed	Up to 4	
Installation slot	PCI slotor PCI-X slot (half size)	PCI Express® x1, x2, x4, x8, x16 slot (half size)
PCI bus / PCI Express® bus specifications	PCI Standard Rev. 2.2 (3.3VDC/5VDC, 32-bit bus, Basic clock: 33MHz)	PCI Express® Standard Rev. 1.1 (3.3 VDC, link width: 1 lane Basic clock: 100 MHz)
No. of occupied slots	1 slot	
Internal current consumption	1.10A(5VDC)	2.07A(3.3VDC)
Weight	Q80BD-J71GP21-SX:0.12kg Q80BD-J71GP21S-SX:0.14kg	Q81BD-J71GP21-SX:0.13kg Q81BD-J71GP21S-SX:0.14kg
Included software	Windows® software package (1 CD-ROM)*	

For information on compatible versions of Windows®, visit the Mitsubishi Electric Factory Automation Website.

Products that do not include a Windows® software package (CD-ROM) are also available. For details, contact your local dealer network.

CC-Línk **IE**

Developing Master Stations

CC-Link IE Field Network Source Code Development

The items shown on the right allow you to develop CC-Link IE Field Network master stations without concern for the protocol.*1

- 1.CP210 is a dedicated communication LSI for the master station of a CC-Link IE Field Network.
- 2.CP210 supports cyclic transmission (RX/RY: 16384 bits each; RWr/RWw: 8192 words each) and transient transmission. The network can be wired into star topology, line topology, and a combination of star and line topologies.*
- 3.Parts are not particularly specified, allowing free parts selection. The source code can be customized in accordance with hardware specifications of the user board and application.
- 4.The source code development CD-ROM includes C-language source code and circuit examples (PDF), making it possible to reduce development costs and shorten the development process.
- ^{*1} Local stations are not supported.
- *2 Ring topologies are not supported.
- •Upon request, hardware and software development partners are introduced.
- •Lead-free / RoHS directive compliant
- •Use of this product requires conclusion of the license agreement with Mitsubishi Electric.


■Source Code




■Manual



■ Dedicated Communication LSI (CP210)





■Source Code

Name	Model	
Source Code Development CD-ROM	SW1DNC-EFI210SRC	

^{*}Source code operation has been verified using the recommended environment.

■ Dedicated Communication LSI (CP210)

Name	Model	Packaging Unit
CP210 (PC08003N)	NZ2GACP210-60	60 pieces
GF2T0 (FC00003N)	NZ2GACP210-300	30 pieces

■ Manual

Title	Manual Number
CC-Link IE Field Network Source Code Development Master Station Communication LSI CP210 Reference Manual	SH(NA)-081455ENG

■ Recommended Environment


Item	Manufacturer	Product Name	Remarks
Compiler	Green Hills Software, Inc.	C/C++ CROSS V800 COMPILER	Compiler version : v4.2.3-A5 This compiler is included in the integrated development environment "MULTI".
os	Renesas Electronics Corporation	RX850	• Version3.20 • μITRON 3.0 specifications compliant









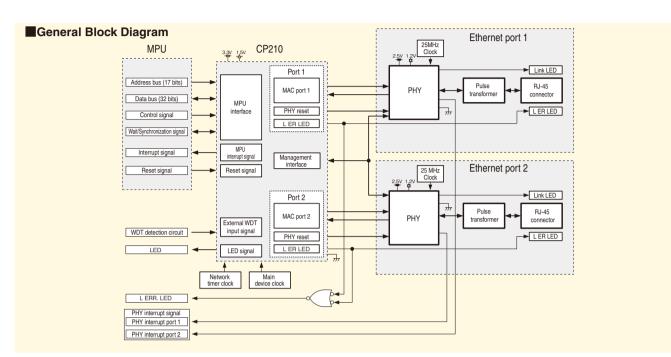


■Basic Specifications of Source Code Development Application Circuit

Classification	pation Ham Description	
Classification	Item	Description
Control area	MPU	V850E/ME2(UPD703111BGM-15-UEU-A) LFQFP 176pins ⁻¹
Memory*2	ROM	FlashROM : 2M words × 16 bits (32 Mbits)
ivieriory -	RAM	SDRAM: 4 banks x 2M words x 16 bits x 2 (256M bits)
Communication area	Dedicated communication LSI	CP210 (PC08003N) BGA 256pins
Display area	LED	RUN, RD ,SD, D LINK ,ERR., L ERR., MST, User LED, LINK, L ER ⁻³

¹ An MPU in which source code operation has been verified.

■External Dimensions

Package: 256 pins Plastic BGA (Ball grid array) Shape: 17 x 17 mm, 1 mm between pins

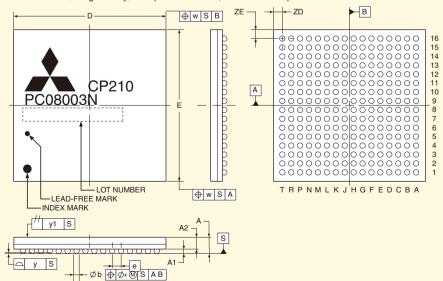

	(UNIT:)
	(UNIT: mm)
ITEM	DIMENSIONS
D	17.00±0.20
Е	17.00±0.20
w	0.30
е	1.00
Α	1.83±0.20
A1	0.50±0.10
A2	1.33
b	0.60±0.10
Х	0.10
у	0.15
y1	0.35
ZD	1.00
ZE	1.00

² The memory capacity is the capacity achieved in an environment in which operation has been verified by Mitsubishi Electric.

The target memory size when the contents of the source code development CD-ROM are compiled in the recommended environment is 0.5M words (8M bits) of ROM and 4M words (64M bits) of RAM.

³ The LED layout, colors, and shapes are not specified.



CC-Línk IE Developing Intelligent Device Stations

Dedicated Communication LSI CP220

The items shown on the right allow you to develop CC-Link IE Field Network products without concern for the protocol.

- 1.CP220 is a dedicated communication LSI for the intelligent device station of a CC-Link IE Field Network.
- 2. CP220 supports cyclic transmission (RX/RY: 2048 bits each; RWr/RWw: 1024 words each) and transient transmission.
- 3. CP220 automatically performs a major portion of the communication functions, thereby reducing the MPU (microcomputer) load and enabling designs that employ low-performing MPUs as well. (Select a little endiantype MPU that has a data bus width of at least 16 bits and an address bus width of at least 17 bits.)
- 4. The CD-ROM that comes with the reference manual includes C-language sample code and circuit examples (PDF), making it possible to reduce development costs and shorten the development process.
- •Upon request, hardware and software development partners are introduced.
- •Lead-free/RoHS directive compliant




■ General Block Diagram Ethernet port 1 MPU CP220 Port 1 Address bus (17 bits) RJ-45 MAC port 1 Data bus (16 bits) PHY reset L ER LED Interrupt signal Reset signal Ethernet port 2 Internal WDT output signal Port 2 Pulse RJ-45 MAC port 2 LED signal L ER LED L ERR. LED PHY interrupt port 2







1.00

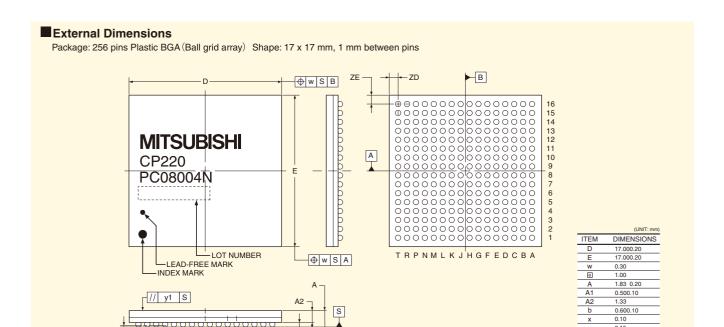

■ Dedicated Communication LSI (CP220)

е

Øb + Øx M S AB

Name	Model	Packaging Unit
CDOOD (DCOODDAN)	NZ2GACP220-60	60 pieces
CP220 (PC08004N)	NZ2GACP220-300	300 pieces

Manual

y s

Title	Manual No.
CC-Link IE Field Network Intelligent Device Station Communication LSI CP220 Reference Manual	SH(NA)-081017ENG

^{*}Provides circuit examples, timing charts, and firmware development methods.




Developing Drivers for the Various Operating Systems of CC-Link IE Field Network PC Interface Board



Q80BD-J71GF11-T2/Q81BD-J71GF11-T2 Driver Development



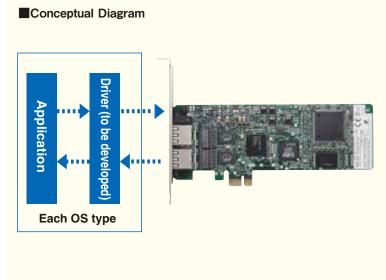

- 1.Developing a driver for the various operating systems enables use of the CC-Link IE Field Network compatible PC interface board as a master station or local station.
- 2.The CC-Link IE Field Network Q80BD-J71GF11-T2/Q81BD-J71GF11-T2 Driver Development Reference Manual helps you develop a PC interface board Q80BD-J71GF11-T2/Q81BD-J71GF11-T2 driver compatible with the various operating systems.
- 3.The reference manual describes the hardware information (PCI configuration area, 2-port memory area, and register area memory map) and software information (driver initialization procedure and parameter setup procedure) required for driver development.
- 4. This reference manual includes sample programs (C language), making it possible to reduce development costs and shorten development man-hours.
- •Upon request, software development partners are introduced.

- Mariaa	
Title	Manual No.
CC-Link IE Field Network	
Q80BD-J71GF11-T2/Q81BD-J71GF11-T2	SH(NA)-081155ENG
Driver Development Reference Manual	



CC-Link IE Field Network PC Interface Boards

Q80BD-J71GF11-T2/Q81BD-J71GF11-T2

- 1. The interface board allows you to incorporate personal computers into the CC-Link IE Field Network.
 - The interface board allows you to use a personal computer as a master station or local station within a CC-Link IE Field Network when mounted.
- 2. The interface board enables simple parameter setup. Using the CC IE Field utility enables simple setup of the parameters required for CC-Link IE Field Network operation.
- 3. The interface board enables system control and high-speed data collection.
 - For a reduction of takt time in a manufacturing system, control data, logging data of manufacturing processes, management data for traceability, and management/diagnostic data for equipment predictive maintenance can be collected at high speed and monitored.
 - A control system using a programming language such as C language can be configured when a personal computer is used as a master station.
 - Control data and logging data can be collected at high speed when a personal computer is used as a local station.
- 4. The interface board allows you to check CC-Link IE Field Network status on the screen.
 - The status of CC-Link IE Field Network can be checked using CC IE Field Utility. Error locations, error causes, and event history are displayed on the screen. This helps to reduce the time for the system to recover from the error.
- 5. The interface board offers RCPU and QCPU multiple CPU system compat-
 - The interface board enables communication with each CPU of a multiple CPU system via specification of logical station numbers using the CC IE Field utility

■Q80BD-J71GF11-T2



■Q81BD-J71GF11-T2



■Specifications

Item	Q80BD-J71GF11-T2	Q81BD-J71GF11-T2	
Station type	Master station	or local station	
Number of boards that can be installed	Up	to 4	
Installation slot	PCI slot or PCI-X slot (half size)	PCI Express® x1, x2, x4, x8, x16 slot (Standard/Low profile, half size)	
PCI bus / PCI Express® bus specifications	PCI Standard Rev. 2.2 (3.3/5 VDC, 32-bit bus, Frequency: 33 MHZ)	PCI Express® 1.1 Standard (3.3 VDC, Maximum data bandwidth: 250 MB/s, Frequency: 100 MHz)	
No. of occupied slots	1slot		
Internal consumption current	1.10 A (5 VDC)	1.68 A (3.3 VDC)	
Weight	0.11kg	Standard size: 0.08 kg, Low profile size: 0.07 kg	
Included software	Windows® software package (1 CD-ROM)*		

^{*} For information on compatible versions of Windows®, visit the Mitsubishi Electric Factory Automation Website.


Products that do not include a Windows® software package (CD-ROM) are also available.

For details, contact your local dealer network.

Developing Master Stations, Local Stations and

CC-Link Ver.2 Built-in Interface Board Q50BD-CCV2

- **1.** The CC-Link Ver.2 built-in interface board enables development of master stations, standby master stations, local stations and intelligent device stations.
 - CC-Link master station, standby master station, local station and intelligent device station functions can be realized by mounting the interface board onto the user circuit board (user application circuit).
- 2. The interface board is compatible with CC-Link Ver.2. With CC-Link Ver.2, the maximum number of cyclic data bits can be extended to 8,192 bits for RX/RY and 2,048 words for RWr/RWw. CC-Link Ver.2 is also compatible with old specifications (Ver.1).
- Minimal space is required.
 The interface board is designed with a compact size of 70mm x 80mm.
- 4. Communication with user application circuit can be performed using a general-purpose bus interface. The interface between the user application circuit and the interface board is comprised of general memory control signals (address bus, data bus, read, write, etc.), making communication with the user application circuit easy.
- •Upon request, hardware and software development partners are introduced.
- •Lead-free/RoHS directive compliant

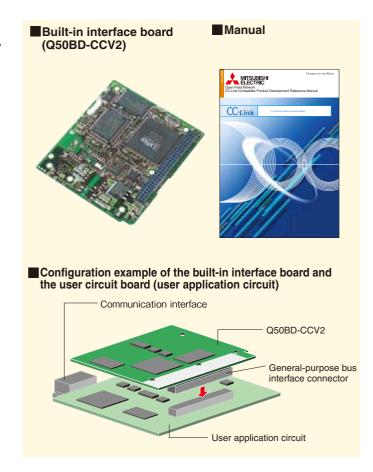

■ Built-in interface board basic specifications

Classification	Item	Description	
Control area	Bus interface	General-purpose bus interface	
Control area	MPU	SH3 (SH7708R) QFP 144 pins	
	ROM	ROM 512K words x 16 bits (8Mbits)	
Memory	SRAM	Dual port RAM 32K words x 16 bits (512Kbits)	
	Shaw	Work RAM 256K words x 16 bits (4Mbits)	
Communication area	Dedicated communication LSI	MFP1N(PC96002M-C)	
Display area	LED	6 LEDs: Green (RUN, L RUN, SD, RD) Red (ERR., L ERR.)	
Setting selection area	Hardware switch*1	Station number setting switch, transmission speed, mode setting switch, select switch	
Current consumption		0.32A	
Circuit board dimensions		70.0×80.0mm	
Weight		0.03kg	

¹¹ Settings can also be configured by software.


Intelligent Device Stations







■Interface Board and User Application Circuit Block Diagram Q50BD-CCV2 User application circuit Control LED MPU RAM MPU Switch circuit (SH3) display (device) CPLD General-purpose bus interface connector General-purpose bus interface connector ADR15-ADR1 Dual port RAM ROM Work MFP1N DAT15-DAT0, ROM (driver) DPCEL DPRDL CPLD DPWRL DPBUSYL CC-Link interface circuit SDGC

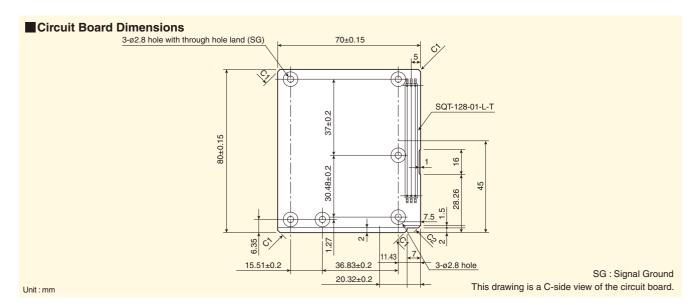

■CC-Link Ver.2 Built-in Interface Board (Q50BD-CCV2)

Name	Model
CC-Link Ver.2 Built-in Interface Board	Q50BD-CCV2

Title	Manual No.
CC-Link Ver.2 Built-in Interface Board Reference Manual	SH(NA)-080700ENG

^{*}Provides circuit examples, timing charts, pin assignments and driver develop methods.

Developing Master Stations, Local Stations and

CC-Link Ver.2 Object Development

- 1. The CC-Link Ver.2 object development kit allows you to develop master stations, local stations, intelligent device stations, and standby master stations.
- 2. The object development kit is compatible with CC-Link Ver 2

With CC-Link Ver.2, the maximum number of cyclic data points can be extended to 8,192 bits for RX/RY and 2,048 words for RWr/RWw. CC-Link Ver.2 is also compatible with old specifications (Ver.1).

- 3. Data communication can be easily performed. Use of a dual port RAM enables easy data communication between the object development application circuit and user application circuit.
- 4. The object code installation method is selectable. The object development application products require the installation of an object code. An installation method can be selected from two methods: using serial communication and using a ROM writer.
- **5.** The object development application circuit is realized using the dedicated communication LSI (MFP1N) and device kit (Q6KT-NPC2OG51).
- •Upon request, hardware and software development partners are introduced.
- •Lead-free/RoHS directive compliant
- •Use of this product requires conclusion of the license agreement with Mitsubishi Electric.

Object development kit





■ Dedicated Communication LSI (MFP1N)



Device kit



Object Development Kit

Name	Model	Packaging Unit
CC-Link Ver.2 Object Development Kit CC-Link Ver.2 Object Development CD-ROM* CC-Link Ver.2 Object Development (master station, local station, intelligent device station) Reference Manual SH(NA)-080701ENG	SW1D5C-CCV2OBJ-E	1 set

^{*}Includes object code and circuit diagram electronic data.

■ Dedicated Communication LSI (MFP1N), Device Kit

[1] Dedicated Communication LSI (MFP1N)

Name	Model	Packaging Unit
MFP1N (PC96002M-C)	A6GA-CCMFP1NN60F	60 pieces
MPP IN (PC96002IVI-C)	A6GA-CCMFP1NN300F	300 pieces

^{*}Package: 100-pins QFP, size: 20 x 14mm, Pin spacing: 0.65mm, Power supply voltage: 5.0VDC

[2] Device Kit

Name	Model	Packaging Unit
Device Kit	Q6KT-NPC2OG51 (Flash ROM x 1, CPLD x 2)	40 sets

Intelligent Device Stations












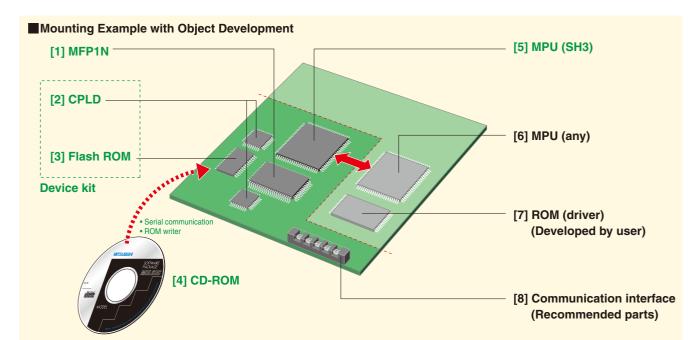

	Name	Product Name	Manufacturer	
[1]	MFP1N (PC96002M-C)	A6GA-CCMFP1NN**F Master, Local, Intelligent Device Station LSI	Mitsubishi Electric Corporation	
[2]	CPLD	Q6KT-NPC2OG51 (Device Kit)	Mitauhiahi Flastria Carparatian	
[3]	Flash ROM	(Flash ROM x 1, CPLD x 2)	Mitsubishi Electric Corporation	
[4]	CD-ROM	Includes object code and circuit diagram electronic data. (SW1D5C-CCV2OBJ)	Mitsubishi Electric Corporation	
[5]	MPU (for object development application circuit)	SH3(SH7708R) HD6417708RF100AV	Renesas Electronics Corporation	
[6]	MPU (for user application circuit)	Any MPU can be used.	Any manufacturer	
[7]	ROM (for driver)	Stores firmware for communicating with the CC-Link object development section.	Developed by user	
[8]	Communication interface	Use the recommended parts.	Each manufacturer	

Object Development Application Circuit Basic Specifications					
Classification	Item	Description			
Control area	MPU	SH3(SH7708R) HD6417708RF100AV QFP 144pin			
	ROM	Flash ROM 512K words × 16 bits (8Mbits)			
Memory	ODAM	Dual port RAM 32K words x 16 bits (512K bits)			
	SRAM	Work RAM 256K words x 16 bits (4M bits)			
Communication area	Dedicated communication LSI	MFP1N(PC96002M-C)			
Display area	LED	RUN, L RUN, SD, RD, BOOT, BOOT OK, ERR., L ERR., BOOT ERR *1			
Setting selection area	Hardware switch*2	Station number switch, transmission speed, mode switch, select switch			

^{*1} The LED layout, colors, and shapes are not specified.

^{*2} Settings can also be configured by software.

Developing Remote Device Stations

Dedicated Communication LSI MFP3N

- 1.The dedicated communication LSI MFP3N allows you to develop CC-Link remote device stations.
- 2.The memory access to the send/receive buffer of MFP3N from the user application allows you to develop devices that handle bit and word data without concern about protocol.
- 3.The MFP3N can apply to CC-Link Ver.1 and CC-Link Ver.2. (For applying to Ver.2, the software must be modified.)
- Upon request, hardware and software development partners are introduced.
- •Lead-free/RoHS directive compliant



■ Data Size

The remote Input/Output (RX/RY: bit data) and remote register (RWw/RWr: word data) can handle the amount of data shown in the table below, based on the number of occupied stations.

			Expanded	Number of occupied stations				
	Туре		Cyclic Setting	1 station occupied	2 station occupied	3 station occupied	4 station occupied	
		Ver.1	-	32 bits	64 bits	96 bits	128 bits	
Remote in	anut DV*		Double	32 bits	96 bits	160 bits	224 bits	
Hemote ir	iput: HX	Ver.2	Quadruple	64 bits	192 bits	320 bits	448 bits	
			Octuple	128 bits	384 bits	640 bits	896 bits	
		Ver.1	-	32 bits	64 bits	96 bits	128 bits	
Downsto o			Double	32 bits	96 bits	160 bits	224 bits	
Hemote o	Remote output: RY*	Ver.2	Quadruple	64 bits	192 bits	320 bits	448 bits	
			Octuple	128 bits	384 bits	640 bits	896 bits	
			-	4 words	8 words	12 words	16 words	
	M→R:RWw Ver.2			Double	8 words	16 words	24 words	32 words
		Ver.2	Quadruple	16 words	32 words	48 words	64 words	
Remote			Octuple	32 words	64 words	96 words	128 words	
register		Ver.1	-	4 words	8 words	12 words	16 words	
	R→M:RWr		Double	8 words	16 words	24 words	32 words	
	H → IVI:HVVr	Ver.2	Quadruple	16 words	32 words	48 words	64 words	
			Octuple	32 words	64 words	96 words	128 words	

^{*}The last 16 points are reserved by the system.











■General Block Diagram

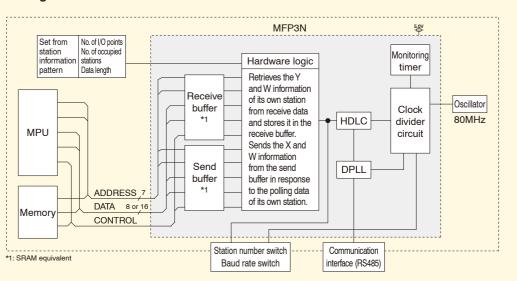

External Dimensions

Package: 100 pins QFP, Shape: 14 x 14 mm, 0.5 mm between pins

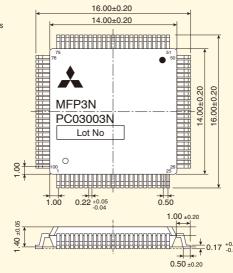

- *The dot is impressed on the package as a lead-free/RoHS directive compliant identification mark.
- *The location of the dot may differ from the actual product.

Detailed view of terminal tip shape 1.60MAX

1.00

0.10 ±0.05

Unit:mm

■ Dedicated Communication LSI (MFP3N)

Name	Model	Packaging Unit
MEDON (DC02002NI)	A6GA-CCMFP3NN60F	60 pieces
MFP3N (PC03003N)	A6GA-CCMFP3NN300F	300 pieces


Title	Manual No.
CC-Link Remote Device Station Communication LSI MFP3N Reference Manual	SH(NA)-080624ENG

^{*}Provides circuit examples, MFP3N electrical characteristics, pin assignments, a detailed memory map and sample flow.

Developing Remote I/O Stations

Dedicated Communication LSI MFP2N / MFP2AN

- 1.The dedicated communication LSI MFP2N and MFP2AN allow you to develop CC-Link remote I/O stations.
- 2.The difference between MFP2N and MFP2AN lies in the package size (number of pins) and I/O point quantity. Other than the package size (number of pins) and I/O point quantity, the LSIs are identical. The master treats both LSIs as remote I/O stations without differentiation. Having both MFP2N and MFP2AN remote I/O stations in the same system is no problem.
- 3.With MFP2N and MFP2AN, CC-Link protocol is fully realized using the dedicated communication LSI, enabling product development with hardware only.(Devices such as an MPU or software are not required.)
- •Upon request, hardware development partners are introduced.
- •Lead-free/RoHS directive compliant

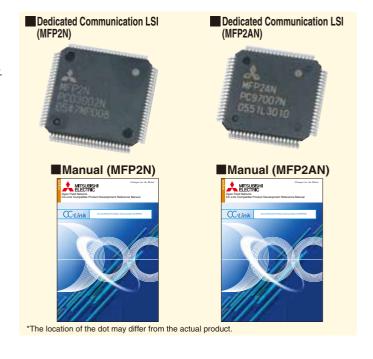

Number of MFP2N I/O Points

The remote I/O station has only one station occupied. The number of I/O points can be selected from the following combinations.

	I/O type	Remarks	
	Remote Input	Remote Output	
(1)	8 points	_	
(2)	-	8 points	
(3)	16 points	-	Any setting other than the 8 types is
(4)	-	16 points	
(5)	8 points	8 points	not possible.
(6)	32 points	-	
(7)	-	32 points	
(8)	16 points	16 points	

Number of MFP2AN I/O Points

The remote I/O station has only one station occupied. The number of I/O points can be selected from the following combinations.

I/O type			Remarks	
	Remote Input	Remote Output	Hemarks	
(1)	16 points	_	Any setting other than the 3 types is not possible.	
(2)	-	16 points		
(3)	8 points	8 points		











■ General Block Diagram (MFP2N)

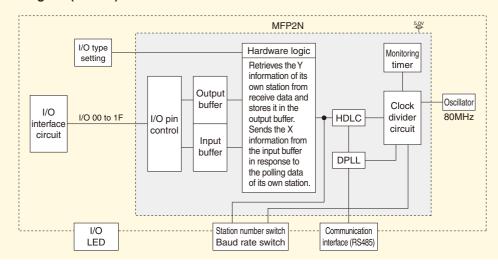

■ External Dimensions


MFP2N

Package: 100 pins QFP, Shape: 14 x 14 mm, 0.5 mm between pins

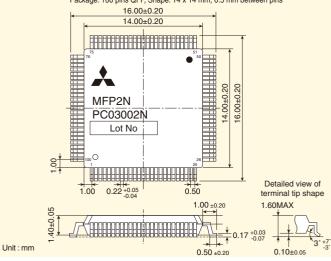

MFP2AN

*The dot is impressed on the package as a lead-free/RoHS directive compliant identification mark.
*The location of the dot may differ from the actual product.

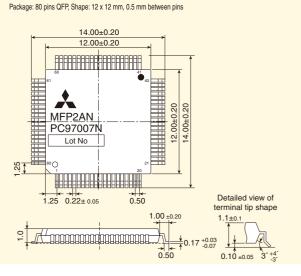

■ Dedicated Communication LSI (MFP2N / MFP2AN)

Dedicated Communication Lor (Mr 1 Ziv / Mr 1 ZAIV)			
Name	Model	Packaging Unit	
MEDON (DOGGOOD)	A6GA-CCMFP2NN60F	60 pieces	
MFP2N (PC03002N)	A6GA-CCMFP2NN300F	300 pieces	
MFP2AN (PC97007N)	A6GA-CCMFP2ANN60F	60 pieces	
	A6GA-CCMFP2ANN300F	300 pieces	


■Manual (MFP2N / MFP2AN)

Title	Manual No.	
CC-Link Remote I/O Station Communication LSI MFP2N Reference Manual	SH(NA)-080622ENG	
CC-Link Remote I/O Station Communication LSI MFP2AN Reference Manual	SH(NA)-080623ENG	


^{*}Provides circuit examples, electrical characteristics, and pin assignments.

Developing Remote I/O Stations

CC-Link Embedded I/O Adapter

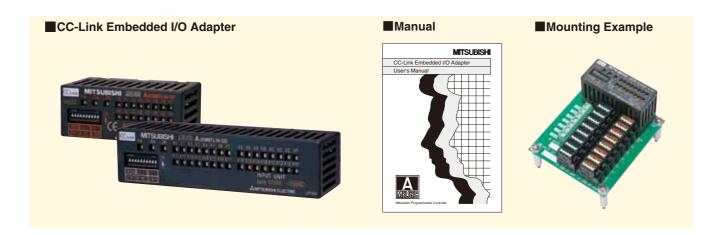

- 1. This adapter is a modular remote I/O used as a device-embedded adapter.
- 2. Using a pin header as the external interface for adapter power supply, transmission, I/O signals and others, the adapter can be installed directly to a user board.
 AJ65MBTL1N-16DT, AJ65MBTL1N-16D, AJ65MBTL1N-16T: 44-pin, 2-row, 2mm-pitch pin header
 AJ65MBTL1N-32D, AJ65MBTL1N-32T: 62-pin, 2-row, 2mm-pitch pin header
- **3.** The adapter power supply uses a transformer insulation method and the external I/O uses a photocoupler insulation method.
- **4.** The transistor output section has the overload, overvoltage and overheat protection functions.
- 5. This adapter includes the dedicated LSI, specified parts, station number switches, and LED indicators.
- 6. The CC-Link embedded I/O adapters can be cascaded. Two CC-Link embedded I/O adapters can be installed side by side within the same board. A distance of 5mm or more is required between the CC-Link embedded I/O adapters. The station number and baud rate settings must be set for each adapter. The I/O allocation for the CC-Link embedded I/O adapter is 32 points per station. Although the latter 16 points of a 16-point I/O Adapters are open, they cannot be used even if I/O adapters are cascaded.

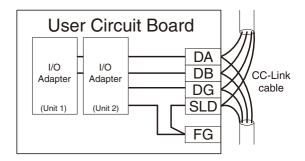


The adapters can be cascaded on the user circuit board as illustrated above. (Cascade connection limit: 2 units, max.)






External Dimensions

AJ65MBTL1N-16DT, AJ65MBTL1N-16D, AJ65MBTL1N-16T

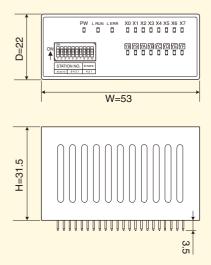

53 (W) x 31.5 (H) x 22 (D) (Unit: mm)

AJ65MBTL1N-32D, AJ65MBTL1N-32T

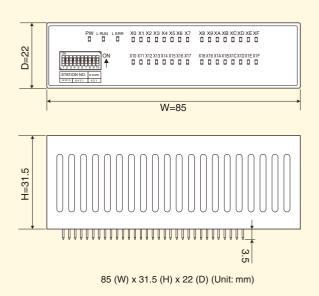

■CC-Link Embedded I/O Adapter


Name	Model	Specifications	Packaging Unit
	AJ65MBTL1N-16DT	24V DC input, plus common (sink type): 8 bits (points); Transistor 0.1A sink output: 8 bits (points)	
CC-Link Embedded I/O Adapter	AJ65MBTL1N-16D 24V DC input, plus common (sink type): 16 bits (points)		1piece
	AJ65MBTL1N-16T	Transistor 0.1A sink output: 16 bits (points)	'
	AJ65MBTL1N-32D	24V DC input, plus common (sink type): 32 bits (points)	
	AJ65MBTL1N-32T	Transistor 0.1A sink output: 32 bits (points)	

Title	Manual No.
CC-Link Embedded I/O Adapter User's Manual	SH(NA)-080324E

Developing Drivers for the Various Operating Systems of CC-Link Ver.2 PC Interface Board



Q80BD-J61BT11N Driver Development

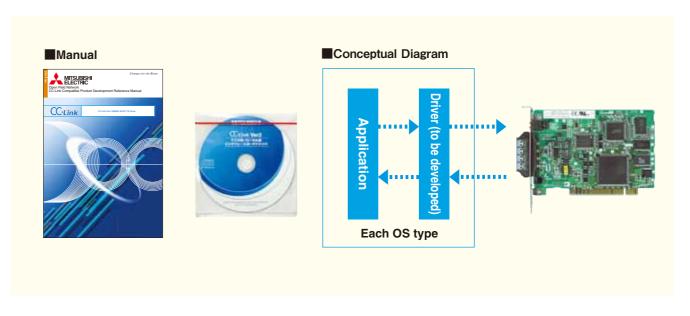

- 1. Developing a driver for the various operating systems enables use of the CC-Link Ver.2 compatible PC interface board as a master station or local station.
- 2. The CC-Link Ver.2 Q80BD-J61BT11N Driver Development Reference Manual helps you develop a PC interface board Q80BD-J61BT11N driver compatible with the various operating systems.
- 3. The reference manual describes the hardware information (PCI configuration area, 2-port memory area and I/O port area.
 - memory maps) and software information (driver initialization procedure and parameter setup procedure) required for driver development.
- 4. This reference manual includes sample programs (C language), making it possible to reduce development opment costs and shorten development man-hours.
- •Upon request, software development partners are introduced.

Title	Manual No.
CC-Link Ver.2 Q80BD-J61BT11N Driver Development Reference Manual	SH(NA)-080702ENG

CC-Link Ver.2 PC Interface Board

Q80BD-J61BT11N

1. The interface board allows you to incorporate personal computers into the CC-Link Ver.2 system.

The interface board allows you to use a personal computer as a master station, standby master station or local station within a CC-Link Ver.2 system when mounted.

- 2. The interface board enables simple parameter setup. Using the CC-Link Ver.2 utility enables simple setup of the parameters required for CC-Link system operation.
- 3. The interface board displays test information and monitor information related to the CC-Link system.

The interface board enables simple display of CC-Link system related test and monitor status information on the personal computer.

4. The interface board offers RCPU and QCPU multiple CPU system compatibil-

The interface board enables communication with each CPU of a multiple CPU system via specification of logical station numbers using the CC-Link Ver.2 utility.

■Q80BD-J61BT11N



■Q81BD-J61BT11



■ Specifications

Item	Q80BD-J61BT11N	Q81BD-J61BT11	
Station type	Master station, standby master station or local station		
Number of occupied stations (for local station)	1 to 4 stations (changed using the parameter settings of Utilities)		
Number of boards that can be installed	Up to 4		
Installation slot	PCI slot (half size)	PCI Express® x1, x2, x4, x8, x16 slot (half size)	
PCI bus specifications	PCI Standard Rev. 2.2 (5 VDC, 32-bit bus, Basic clock: 33 MHz)	PCI Express® Standard Rev. 1.0a (3.3 VDC, link width: 1 lane, Basic clock: 100 MHz)	
Number of occupied slots	1 slot		
Internal consumption current	0.56 A (5 VDC)	1.06 A (3.3 VDC)	
Weight	0.11kg		
Included software	Windows® software package (1 CD-ROM)*		

For information on compatible versions of Windows®, visit the Mitsubishi Electric Factory Automation Website.

Products that do not include a Windows® software package (CD-ROM) are also available. For details, contact your local dealer network.

CC-Link/LT Developing Master Stations

Dedicated Communication LSI CLC13

The master station is comprised of a master station communication LSI (CLC13) and peripheral communication circuit. A "General Block Diagram" of the master station is shown below.

- 1. CC-Link/LT Communication Interface
 - [1] Master Station Function CLC13 has a CC-Link/LT master station function, enabling data link with CC-Link/LT remote stations.
 - [2] Monitor Function


The monitor function allows you to monitor CC-Link/LT transmission frames (master station send frames and remote station transmission frames). (The function lets you monitor transmission frame remote I/O data and remote station status information.)

2. Microcomputer Interface

CLC13 includes an interface that enables generalpurpose microcomputer connection, allowing you to read and write remote I/O and other data using a generalpurpose microcomputer. (CLC13 can be accessed as regular memory from the general-purpose microcom-

- •Upon request, hardware and software development partners are introduced.
- •Lead-free/RoHS directive compliant



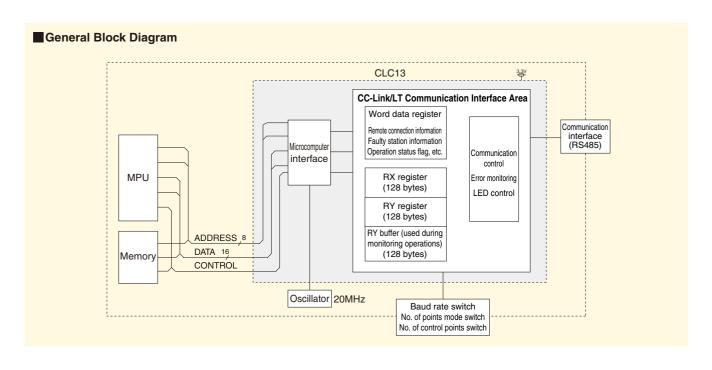










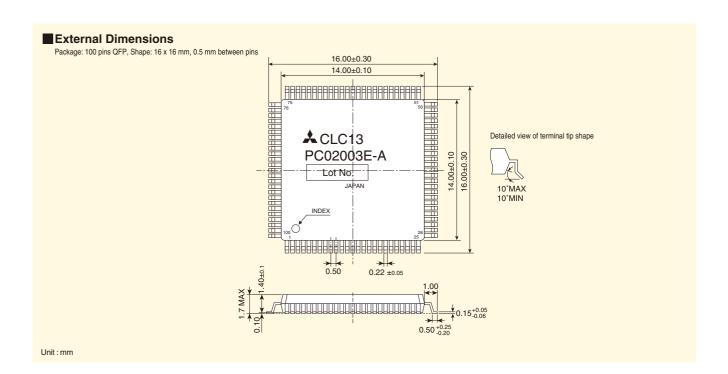

■ Dedicated Communication LSI (CLC13)

Name	Model	Packaging Unit
CLC13 (PC02003E-A)	CL2GA13-60	60 pieces

Title	Manual No.
CC-Link/LT Master Station Communication LSI CLC13 Reference Manual	SH(NA)-080703ENG

^{*}Provides circuit examples, CLC13 electrical characteristics and pin assignments.

CC-Link/LT Developing Remote Device Stations

Dedicated Communication LSI CLC31

The remote device station is comprised of a remote device station communication LSI (CLC31) and peripheral communication circuit. A "General Block Diagram" of the remote device station is shown below.

- 1. CLC31 is mounted on the same board with the MPU and memory device, and is controlled by user-developed software.
- 2. CLC31 has the CC-Link/LT protocol built-in, allowing developers to develop software without concern about protocol.
- 3. The data amount of 4 words can be handled with a single chip. (One word is allocated for each station, and up to 4 stations can be occupied.) By setting the number of occupied stations, the developer can specify the optimum data amount for the device to be developed. This enables reduction of the number of occupied stations of the device.
- **4.** CLC31 has a built-in function that assures 1-word (16-bit) data communication (i.e., prevents data separation). For this reason, a remote device station connected to the network must be operated in 16-bit mode.
- •Upon request, hardware and software development partners are introduced.
- •Lead-free/RoHS directive compliant



■ General Block Diagram Monitoring Hardware logic timer Retrieves the Y information of its own Receive Oscillator station from receive Clock buffer data and stores it in 20MHz **HDLC** divider MPU the receive buffer. circuit Sends the X information from the DPLL send buffer in Send buffer response to the polling ADDRESS ,6 data of its own station. DATA 8 or 16 Memory CONTROL Station number Communication switch interface (RS485)











External Dimensions
Package: 80 pins QFP, Shape: 14 x 14 mm, 0.5 mm between pins

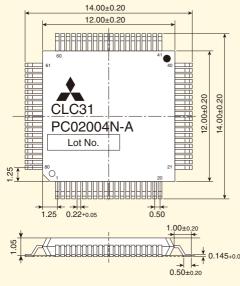

- *The dot is impressed on the package as a lead-free/RoHS directive compliant identification mark.
- *The location of the dot may differ from the actual product.

Detailed view of terminal tip shape



0.145+0.05

■ Dedicated Communication LSI (CLC31)

Name	Model	Packaging Unit
CLC31 (PC02004N-A)	CL2GA31-60	60 pieces

Manual

Unit: mm

Title	Manual No.
CC-Link/LT Remote Device Station Communication LSI CLC31 Reference Manual	SH(NA)-080704ENG

^{*}Provides circuit examples, CLC31 electrical characteristics and pin assignments, etc.

CC-Link/LT Developing Remote I/O Stations

Dedicated Communication LSI CLC21

The remote I/O station is comprised of a remote I/O station communication LSI (CLC21) and peripheral communication circuit. A "General Block Diagram" of the remote I/O station is shown below.

CC-Link/LT protocol is fully realized with CLC21, allowing development with hardware only. (MPU, software and other devices are not required.)

- •Upon request, hardware development partners are introduced.
- •Lead-free/RoHS directive compliant



Number of CLC21 I/O Points

The number of I/O points can be selected from the following combinations.

I/O Type			Demonito		
	Remote Input	Remote Output	Remarks		
(1)	1 point	-			
(2)	-	1 point			
(3)	2 point	-			
(4)	1 point	1 point			
(5)	-	2 point			
(6)	4 point	-			
(7)	2 point	2 point			
(8)	-	4 point			
(9)	8 point	-			
(10)	4 point	4 point	Any setting other than		
(11)	-	8 point	the 20 types is not possible.		
(12)	12 point	-			
(13)	8 point	4 point			
(14)	4 point	8 point			
(15)	_	12 point			
(16)	16 point	-			
(17)	12 point	4 point			
(18)	8 point	8 point			
(19)	4 point	12 point			
(20)	-	16 point			










■ General Block Diagram

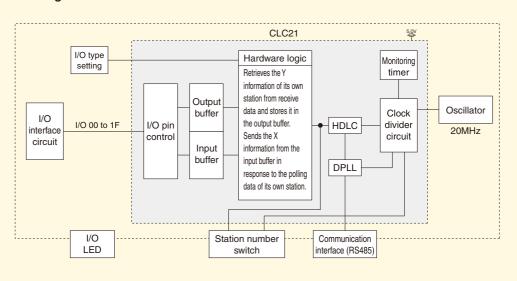

■ External Dimensions *The dot is impressed on the package as a lead-free/RoHS directive compliant identification mark. Package: 80 pins QFP, Shape: 14 x 14 mm, 0.5 mm between pins 14.00±0.20 *The location of the dot may differ from the actual product. 12.00±0.20 Detailed view of terminal tip shape 12.00±0.20 14.00±0.20 PC01003N Lot No. 0.1±0.05 0.50 1.25 0.22+0.05 ←1.00 ±0.20 ± 0.145 +0.05 0.50 ±0.20 Unit: mm

■ Dedicated Communication LSI (CLC21)

Name	Model	Packaging Unit
CLCQ4 (DCQ4QQQNI)	CL2GA21-60	60 pieces
CLC21 (PC01003N)	CL2GA21-300	300 pieces

Title	Manual No.
CC-Link/LT Remote I/O Station Communication LSI CLC21 Reference Manual	SH(NA)-080707ENG

^{*}Provides circuit examples, CLC21 electrical characteristics and pin assignments, etc.



Recommended Parts/Specified Parts

CC-Link IE Field Network

■ Recommended Parts and Specified Parts

There are no parts recommended or specified by the CC-Link Partner Association or Mitsubishi Electric.

■Parts Requiring Caution at the Time of Selection

For the parts in the table below, use parts that satisfy the selection conditions specified by the CC-Link Partner Association and Mitsubishi Electric.

Item	Selection Conditions	Condition Specified By	Reference Model *	Reference Manufacturer*
RJ45 connector	"ANSI/TIA/EIA-568-B" 8-pin connector with shield	CC-Link Partner	1827585-1	Tyco Electronics Japan G.K.
Pulse transformer	IEEE802.3 1000BASE-T compatible	Association	MGF101	Sinka Japan Co., Ltd.
PHY	IEEE802.3 1000BASE-T compatible Full duplex compatible Auto negotiation function compatible GMII interface compatible Auto MDI/MDIX negotiation compatible MDC clock 7.812 MHz compatible	CC-Link Partner Association / Mitsubishi Electric Corporation	88E1111-B2-BAB1C000	Marvell Semiconductor, Inc.
MPU	Data width: 32 bits or more (CP220-based development: 16 bits or more) Address width: 17 bits or more Endian: Little endian	Mitsubishi Electric	V850E/ME2	Renesas Electronic Corporation
125 MHz crystal oscillator 2.097152 MHz crystal oscillator Frequency deviation: Within ±50 ppm			DSO321SV 125.000MHz DSO321SR 2.097152MHz	Daishinku Corporation

^{*}Reference models and manufacturers of parts described in the manual (circuit diagram examples).

CC-Link

Recommended Parts/Specified Parts

CC-Link

■CC-Link Partner Association Recommended Parts

The following shows the recommended parts by the CC-Link Partner Association for use in the design of CC-Link interface circuits.

Item	Model	Manufacturer
Filter	MCT7050-A401	Sinka Japan Co., Ltd.
RS485 transceiver	SN75ALS181NS	Texas Instruments, Ltd.
Zener diode	RD6.2Z	Renesas Electronics Corporation
Zerier diode	PESD5V0U1UA	NXP Semiconductors N.V.
Photocoupler	HCPL-7720-500E *1	
Filotocouplei	HCPL-0720-500E *2	Avena Taskaslasias I tel
	HCPL-2611-500E *1	Avago Technologies, Ltd.
Photocoupler	HCPL-M611-500E *2	
	PS9117A	Renesas Electronics Corporation

Mitsubishi Electric Corporation Specified Parts

The following shows the specified parts to be used when developing a product based on a development method provided by Mitsubishi Electric.

Item	Model	Manufacturer	
MPU	SH3 (SH7708R) HD6417708RF100AV *	Renesas Electronics Corporation	
Device kit	Q6KT-NPC2OG51*	Mitsubishi Electric Corporation	
Device Kit	(Flash ROM x 1, CPLD x 2) x 40	Milsubistii Electric Corporation	
	DSO751SBM 80MHz	Daishinku Corporation	
Crystal oscillator	DSO751SB 80MHz	Daishinku Corporation	
	KC7050B80.0000C5ZBQZ (FXO-37FNB 80MHz)	Kyocera Crystal Device Corporation	

Used with CC-Link Ver.2 object development only.

■ Combinations of Development Methods, CC-Link Partner Association Recommended Parts, and Mitsubishi Electric Corporation Specified Parts.

Item	Model	Built-In Interface Board (Q50BD-CCV2)	Object Development	MFP3N	MFP2N, MFP2AN	Embedded I/O Adapter (AJ65MBTL1N-***)
Filter	MCT7050-A401	0	0	0	0	_
RS485 transceiver	SN75ALS181NS	0	0	0	0	_
Zener diode	RD6.2Z		0	0		
Zeriei diode	PESD5V0U1UA			0		_
Photocoupler	HCPL-7720-500E	0	0	Δ		
Priotocoupiei	HCPL-0720-500E			Δ	Δ	_
	HCPL-2611-500E					
Photocoupler	HCPL-M611-500E		0	\triangle	Δ	_
	PS9117A					
MPU	SH3 (SH7708R)	_	0	_	_	_
Device kit	Q6KT-NPC2OG51	_	0	_	_	_
	DSO751SBM 80MHz					
Crystal	DSO751SB 80MHz					
oscillator 1	KC7050B 80.0000C5ZBQZ			0	0	

^{○:} Required △: Optional —: Already provided in product or not required

Specify Option 060 when V_{IORM} = 630V_{PEAK} electrical isolation is required.
 Specify Option 060 when V_{IORM} = 560V_{PEAK} electrical isolation is required.
 Note: For the model information of CC-Link Partner Association recommended parts, contact the CC-Link Partner Association.

¹ EMC Directive compatibility needs to be verified by the customer.

CC-Link/LT Recommended Parts/Specified Parts

CC-Link/LT

■ CC-Link Partner Association Recommended Parts

The following shows the recommended parts by the CC-Link Partner Association for use in the design of CC-Link/LT interface circuits.

Item	Model	Manufacturer
Filter (for master station)	CM04RC04T	Taiyo Yuden Co., Ltd.
Filter (for slave station)	DLW31SN102SQ2	Murata Manufacturing Co., Ltd.
RS485 transceiver	MAX1487CSA	Maxim Integrated Products, Inc.
Zener diode*	PESD5V0U1UA	NXP Semiconductors N.V.
Zener diode	UDZU5.6B	ROHM Co., Ltd.
Photocoupler	PS9117A	Renesas Electronics Corporation

^{*}For the Zener diode, use PESD5V0U1UA and UDZU5.6B in combination.

■ Mitsubishi Electric Corporation Recommended Parts

Item	Model	Manufacturer
Crystal oscillator	DSO751SBM 20MHz	
(for master station)	DSO751SB 20MHz	Daishinku Corporation
Crystal resonator (for slave station)	SMD-49 20MHz	
Single bus buffer gate with 3-state output (CMOS)	SN74AHCT1G125	Texas Instruments, Ltd.

Combinations of Development Methods, CC-Link Partner Association Recommended Parts, and Mitsubishi Electric Corporation Recommended Parts.

Item	Model	CLC13	CLC31	CLC21
Filter	CM04RC04T	0	_	_
riiter	DLW31SN102SQ2	_	0	0
RS485 transceiver	MAX1487CSA	0	0	0
7	PESD5V0U1UA	0 0		
Zener diode	UDZU5.6B	0		
Photocoupler	PS9117A	0	0	0
Ot-1:!!-t	DSO751SBM 20MHz			_
Crystal oscillator	DSO751SB 20MHz		_	
Crystal resonator	SMD-49 20MH	_	0	0
Single bus buffer gate with 3-state output (CMOS)	SN74AHCT1G125	_	0	_

■ Connector (Circuit Board Side)

Item	Model	Manufacturer
Right angle	38204-52S3-MOM SC	Sumitama 2M I td
Straight type	38204-62S3-MOM SC Sumitomo 3M Ltd.	



CC-Link IE Technical Information

CC-Link IE Control Network Specifications



Performance specifications

Item			Specifications		
	LB		32 K bits (32768 points, 4 Kbytes)		
		ь	(Basic model QCPU, safety CPU: 1	6 K words (16384 points, 2 Kbytes)	
ဂ္ဂ	Maximum number of	LW	128 K words (13107)	2 points, 256 Kbytes)	
Control	link points per network	ork	(Basic model QCPU, safety CPU: 16 K words (16384 points, 32 Kbytes)		
		LX	8 K bits (8192	points, 1 Kbyte)	
specifications		LY	8 K bits (8192	points, 1 Kbyte)	
Sific			Normal mode	Extended mode*1	
atio	Maximum number of	LB	16 K bits (16384 points, 2 Kbytes)	32 K bits (32768 points, 4 Kbytes)	
ons		LW	16 K words(16384 points, 32 Kbytes)	128 K words (131072 points, 256 Kbytes)	
	link points per station	LX	8 K bits (8192 points, 1 Kbyte)	8 K bits (8192 points, 1 Kbyte)	
		LY	8 K bits (8192 points, 1 Kbyte)	8 K bits (8192 points, 1 Kbyte)	
Com	Communication speed		1Gbps		
Num	Number of connected stations per network		Maximum of 120 stations (control stations: 1, normal stations: 119)		
Conr	ection cable		Optical fiber cable (multi-mode fiber)		
Over	all cable distance		66000 m (with 120 stations connected)		
Dista	Distance between stations (maximum)		550 m [core/clad = 50/125 (μm)]		
Maxi	Maximum number of networks		239		
Maxi	mum number of groups		3	2	
Topo	Topology		Ring		


^{*1} When extended mode is used, a CC-Link IE Control Network module with "12052" or thereafter as the first five digits of its serial number [QJ71GP21(S)-SX], a universal model QCPU with "12052" or thereafter as the first five digits of its serial number, and GX Works 2, Version 1.34L or later, are required. Additionally, all stations must support extended mode.

Cable specifications

	Item	Specifications
		1000BASE-SX (MMF) compatible optical fiber cable
Optical fiber	Standard	IEC 60793-2-10 Type A1a.1 (50/125 μm multimode)
specifications	Transmission loss (max)	3.5 (dB/km) or less (λ =850nm)
	Transmission band (min)	500 (MHz/km) or more (λ =850nm)
		Duplex LC connector
Connector	Standard	IEC61754-20: Type LC connector
specifications	Connection loss	0.3 (dB) or less
	Polished surface	PC (Physical Contact) polishing

For details regarding the connection cable, etc., contact the CC-Link Partner Association.

Network wiring example

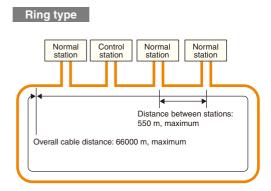



CC-Línk IE Technical Information

CC-Link IE Field Network Specifications CC-Link IE Field

Performance specifications

Item			Specifications
		RX	16 K bits (16384 points, 2 K bytes)
ဂ္ဂ	Maximum number of	RY	16 K bits (16384 points, 2 K bytes)
Control	link points per network	RWr	8 K words (8192 points, 16 K bytes)
		RWw	8 K words (8192 points, 16 K bytes)
specification		RX	2 K bits (2048 points, 256 bytes)
Cific	Maximum number of	RY	2 K bits (2048 points, 256 bytes)
ati	link points per station	RWr	1 K words (1024 points, 2 K bytes)
ons		RWw	1 K words (1024 points, 2 K bytes)
Comr	Communication speed		1Gbps
Numb	Number of connected stations per network		121 stations (master stations: 1, slave stations: 120, maximum)
Conn	ection cable		Ethernet cable (Category 5e or higher)
Overa	all cable distance	Line type	12000 m (with 1 master station and 120 slave stations connected)
(maxi	mum)	Star type	According to system configuration*1
Dista	Distance between stations (maximum)		100m
Maxir	Maximum number of networks		239
Topol	Topology		Line, star, line/star mixed, ring*2

Up to 20 hubs are connectable.

The ring topology cannot be combined with line or star topologies.

The ring topology requires, master/local modules (QJ71GF11-T2) whose serial number (first five digits) is "12072" or later, and GX Works 2, Version 1.34L or later.

The ring topology requires, master/local modules (QJ71GF11-T2) whose serial number (first five digits) is "12072" or later, and GX Works 2, Version 1.34L or later. The software package SW1DNC-CCIEF-J that comes with the PC interface board is not ring topology compatible. For compatibility, download SW1DNC-CCIEF-B from the Mitsubishi Electric Factory Automation Website.

The source code (SW1DNC-EFI210SRC) is not ring-topology compatible.

Cable specifications


Item		Specifications
		Straight cable (with double shield, STP)
		A cable that satisfies either of the following standards:
Ethernet cable	Standard	•IEEE 802.3 1000BASE-T
		•ANSI/TIA/EIA-568-B (Category 5e)
	Connector	Category 5e or higher, RJ45 jack


For CC-Link IE Field Network wiring, use the wiring parts recommended by the CC-Link Partner Association.

A CC-Link IE Control Network cable cannot be used in a CC-Link IE Field Network.

Network wiring example

Line type

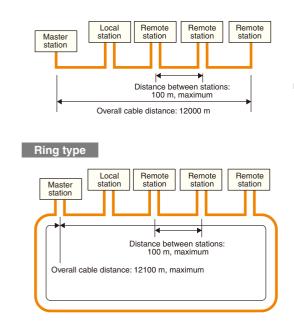

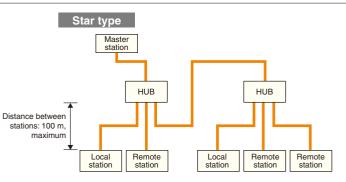

CC-Link

Technical Information

CC-Link (Ver.1.10) specifications CC-Link

	Item	Specifications				
င္ပ		Remote I/O (RX,RY) : 2048 bits each				
ntro	Maximum number of link points per system	Remote register (RWw) : 256 words				
ol sp		Remote register (RWr) : 256 words				
Control specification		Remote I/O (RX,RY) : 32 bits each				
ficat	Number of link points per station	Remote register (RWw) : 4 words				
ō.	· ·	Remote register (RWr) : 4 words				
	Transmission speed	10M/5M/2.5M/625k/156kbps				
	Transmission method	Broadcast polling method				
	Synchronization method	Frame synchronization method				
	Encoding method	NRZI method				
	Network topology	Bus type (conforming to EIA RS485)				
	Transmission format	HDLC compliant				
	Error control method	CRC (X ¹⁶ + X ¹² + X ⁵ x 1)				
		64 modules. However, the following conditions must be satisfied.				
		$(1 \times a) + (2 \times b) + (3 \times c) + (4 \times d) = <64$				
		a: Number of modules occupying 1 station, b: Number of modules occupying 2 stations,				
	Number of connected modules	c: Number of modules occupying 3 stations, d: Number of modules occupying 4 stations				
		(16 x A) + (54 x B) + (88 x C) =< 2304				
		A: Number of remote I/O stations				
		B: Number of remote device stations				
S		C: Number of local station, standby master station, and intelligent device station Max. 26 modules				
mm	Remote station No.	1 to 64				
Communication specification	Maximum overall cable distance and cable length between stations	Remote I/O station or remote device station Remote I/O station or remote device station Remote I/O station or remote device station Remote I/O station or intelligent device station Station-to-station cable length				
	Connection cable	Ver.1.10-compatible CC-Link dedicated cable • Use the dedicated cable certified by CC-Link Partner Association. • Ver.1.10-compatible CC-Link dedicated cables manufactured by different companies can be used together. • For the specifications of the CC-Link dedicated cable or the contact information on them, refer to the partner product catalogs published by CC-Link Partner Association or visit its web site at http://www.cc-link.org				
		refresh function*2 Remote I/O network mode*2				
Fu		AS functions Scan synchronization function				
Function	, , ,	atic return, slave station separation, Automatic CC-Link startup*3				
on	error detection by the link s	pecial relay and register, test/monitor) Reserved station function				
		Error invalid station setting function				
	Support for duplex function*3 Max 64 modules when using the MELSEC iO-B Series (B.I61BT11)'s remote device net Ver 1 mode or the remote device net Ver 2 mode					


^{*1.} Max. 64 modules when using the MELSEC iQ-R Series (RJ61BT11)'s remote device net Ver.1 mode or the remote device net Ver.2 mode.

 $[\]ensuremath{^{\star}}\xspace$ 2. May not be supported depending on CPUs to be used together.

 $^{^{\}star}$ 3. This function is available only for the Q Series.

T-Branch Communication Specifications [Without Repeater (T-Branch) Module Use]



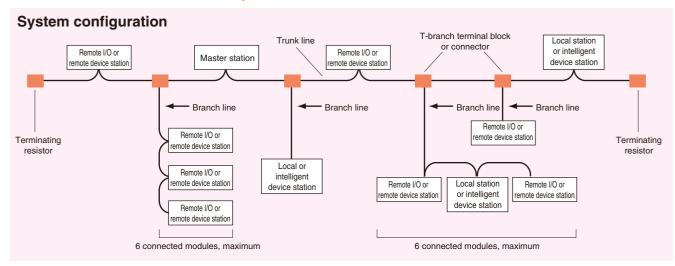

The following shows the communication specifications in the case of T-branch connection without use of a repeater (T-branch) module.

The communication specifications not listed below depends on the with CC-Link specifications.							
Item		Spe	cifications		Remarks		
Transmission speed	625kbps 156kbps			156kbps	10M/5M/2.5Mbps not permitted		
Maximum trunk line length	100m 500m			500m	Cable length betw	ween terminating resistors (Branch line length not included)	
Maximum branch line length	gth 8m			Total cable length per branch			
Overall branch line length	50	m		200m		Total length for all branch cables	
Maximum number of modules		6 module	es per branch		Total number of	connected modules depends on the CC-Link specifications.	
connected to a branch line		- O Triodais	oo per branen			<u> </u>	
	• Ver.1.10-compa	atible CC-Link d	ledicated cable			Link dedicated cables manufactured by different companies can be used together.	
Cable	CC-Link dedica			e)		es (Ver.1.00-compatible) manufactured by different companies cannot be used together.	
		<u> </u>	<u> </u>	<u></u>	CC-Link dedicated h	nigh-performance cables (Ver.1.00-compatible) cannot be used.	
T-branch terminal block	Terminal block:						
or connector			*	i-2) equivalent product is	Do not remove the	e jacket of the cables on the trunk line, if possible.	
	recommended. (Ni	=CA: Nippon Elect	ric Control Equipm	ent Industries Association)			
	Ver.1.10-compa	tible CC-Link d	edicated cable	(a terminating resistor of	f 110Ω used)		
	Transmission Maximum Distance between Cable length between remote I/O and the station one before/af				Cable length between a master/local station and the station one before/after the master/local station		
		trunk length	T-branches	stations or remote de		or an intelligent device station and the station before/after the intelligent device station*2	
	625kbps	100m				before/after the intelligent device station 2	
	156kbps 500m		No restriction 30cm or lor		onger	1m or longer (A), 2m or longer (B)	
	(A): This applies to a system configured with a remote I/O station and remote device station only.						
			, ,		configuration including a local station and intelligent device station.		
	*1,*2 Refer to the following figure.						
Maximum							
trunk line length,	Maximum trunk line length (not including the branch line length)					line length)	
distance between	Terminating +2 +2 Termina						
T-branches	resistor				'1 *1 <u> </u>	resistor	
and cable length between stations		Y, T	Y			2 7	
Detween stations		R	Master	station R			
		— (r		*2	*2		
		_ح	R			*2 *1 *1 *1 *1	
		" _	R				
		*1 (=		L/I		L/I R R R R	
		Ч	R				
		(Branch line len	gth: 8m or shorte	ar)		(Branch line length: 8m or shorter)	
		(=:3::0:: ::::0 1011)	J 0 0. 0.10110	,		R Indicates remote I/O station or remote device station.	
						L/I Indicates local station or intelligent device station.	



Differences between CC-Link Ver.2 and Ver.1 CC-Link

With Ver.2, the cyclic data size can be increased through extended cyclic setting.

CC-Link Ver.1 specification

Item			Specifications			
Maximum number of link points		Remote I/O (RX, RY): 2048 bits each	Remote register (RWw): 256 words	Remote register (RWr): 256 words		
Number of link points per station		Remote I/O (RX, RY): 32 bits each	Remote register (RWw): 4 words	Remote register (RWr): 4 words		
	1 station occupied	Remote I/O (RX, RY): 32 bits each	Remote register (RWw): 4 words	Remote register (RWr): 4 words		
Number of link points for	2 station occupied	Remote I/O (RX, RY): 64 bits each	Remote register (RWw): 8 words	Remote register (RWr): 8 words		
each number of occupied station	3 station occupied	Remote I/O (RX, RY): 96 bits each	Remote register (RWw): 12 words	Remote register (RWr): 12 words		
	4 station occupied	Remote I/O (RX, RY): 128 bits each	Remote register (RWw): 16 words	Remote register (RWr): 16 words		
		Total number of stations				
		$(1 \times a) + (2 \times b) + (3 \times c) + (4 \times d) = < 64$				
		a: Number of 1-station occupying modules, b: Number of 2-station occupying modules,				
		c: Number of 3-station occupying modules, d: Number 4-station occupying modules				
Number of connected modu	les	2. Number of connected modules				
		(16 x a) + (54 x b) + (88 x c) = <2304				
		A: Number of remote I/O stations				
		B: Number of remote device stations				
		C: Number of local stations, standby master stations, intelligent device stations Max. 26 modules				

^{*} Max. 64 modules when using the MELSEC iQ-R Series (RJ61BT11)'s remote device net Ver.1 mode or the remote device net Ver.2 mode.

CC-Link Ver.2 specification

Item		Specifications				
Maxi	mum number of link	c points	Remote I/O (RX, RY): 81	92 bits each, Remote register (RWw): 2048 words, Remote re	egister (RWr): 2048 words
Expanded cycle setting		Single	Double	Quadruple	Octuple	
Num	ber of link	Remote I/O (RX, RY)	32 bits each	32 bits each	64 bits each	128 bits each
	s per station	Remote register (RWw)	4 words	8 words	16 words	32 words
point	3 per station	Remote register (RWr)	4 words	8 words	16 words	32 words
		Remote I/O (RX, RY)	32 bits each	32 bits each	64 bits each	128 bits each
_ Z	1 station occupied	Remote register (RWw)	4 words	8 words	16 words	32 words
ᄪ		Remote register (RWr)	4 words	8 words	16 words	32 words
ber o		Remote I/O (RX, RY)	64 bits each	96 bits each	192 bits each	384 bits each
9 ₹	2 station occupied	Remote register (RWw)	8 words	16 words	32 words	64 words
Number of link points for each number of occupied station		Remote register (RWr)	8 words	16 words	32 words	64 words
upie		Remote I/O (RX, RY)	96 bits each	160 bits each	320 bits each	640 bits each
ed s	3 station occupied	Remote register (RWw)	12 words	24 words	48 words	96 words
for each station		Remote register (RWr)	12 words	24 words	48 words	96 words
ach on		Remote I/O (RX, RY)	128 bits each	224 bits each	448 bits each	896 bits each
	4 station occupied	Remote register (RWw)	16 words	32 words	64 words	128 words
		Remote register (RWr)	16 words	32 words	64 words	128 words
Num	Number of connected modules		1. Total number of stations (a + a2 + a4 + a8) + (b + b2 + b4 + b8) x 2 + (c + c2 + c4 + c8) x 3 + (d + d2 + d4 + d8) x 4 =<64 2. Number of input/output points of all remote stations (a x 32 + a2 x 32 + a4 x 64 + a8 x 128) + (b x 64 + b2 x 96 + b4 x 192 + b8 x 384) + (c x 96 + c2 x 160 + c4 x 320 + c8 x 640) + (d x 128 + d2 x 224 + d4 x 448 + d8 x 896) =<8192 3. Number of all remote register words (a x 4 + a2 x 8 + a4 x 16 + a8 x 32) + (b x 8 + b2 x 16 + b4 x 32 + b8 x 64) + (c x 12 + c2 x 24 + c4 x 48 + c8 x 96) + (d x 16 + d2 x 32 + d4 x 64 + d8 x 128) =<2048 a: Number of 1-station occupying modules with single extended cyclic setting b: Number of 2-station occupying modules with single extended cyclic setting c: Number of 3-station occupying modules with single extended cyclic setting c: Number of 3-station occupying modules with single extended cyclic setting c: Number of 3-station occupying modules with single extended cyclic setting c: Number of 3-station occupying modules with ocuple extended cyclic setting extended cyclic setting c: Number of 3-station occupying modules with ocuple option setting c: Number of 3-station occupying modules with ocuple option setting c: Number of 3-station occupying modules with ocuple option setting c: Number of 3-station occupying modules with ocuple option setting c: Number of 3-station occupying modules with ocuple option setting c: Number of 3-station occupying modules with occupling modules with ocuple option setting c: Number of 3-station occupying modules with occupling modules with ocuple extended cyclic setting exten			
		B: Number of remote device			Max. 42 modules*	


 $^{^{\}star}$ "2." and "3." are Ver.2 mode only; calculation is necessary.

^{*} There is no change in the cable and wiring specification for CC-Link Ver.2. Use Ver.1.10-compatible CC-Link dedicated cable for the connection of Ver.2 devices.

CC-Link specifications CC-Link

- ■The CC-Link Ver.1.10 and Ver.1.00 specifications differ in the following two items:
 - Maximum overall cable length and cable length between stations
 - Cable

CC-Link Ver.1.00 Specifications (Differences from Ver.1.10)

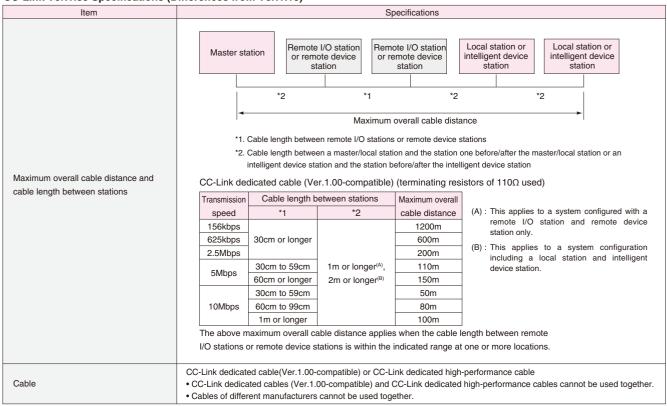


CC-Link/LT specifications CC-Link/LT

	Item			4-point mode	8-point mode	16-point mode		
	Maximum number of link points (When the same I/O address is used)			256 bits (512 bits)	512 bits (1024 bits)	1024 bits (2048 bits)		
	Number of link points per station (When the same I/O address is used)			4 bits (8 bits)	8 bits (16 bits)	16 bits (32 bits)		
Control			Number of points	128 bits	256 bits	512 bits		
		When 32 stations	2.5 Mbps	0.7	0.8	1.0		
spe		are connected	625 kbps	2.2	2.7	3.8		
specifications	Link scan time		156 kbps	8.0	10.0	14.1		
atic	(ms)		Number of points	256 bits	512 bits	1024 bits		
ons		When 64 stations	2.5 Mbps	1.2	1.5	2.0		
		are connected	625 kbps	4.3	5.4	7.4		
			156kbps	15.6	20.0	27.8		
	Transmission spe	eed		2.5M/625k/156kbps				
	Communication	orotocol		BITR (Broadcast polling+Interval Timed Response)				
Communication	Network topology	/		T-branch				
l m	Error control method			CRC				
nica	Number of connected modules			64				
atio	Remote station number			1 to 64				
n sp	Maximum numbe	er of connectable stati	ons per branch line	8				
specification	Distance betwee	n stations		No restriction				
	T-branch interval			No restriction				
	Master station connection position		End of trunk line					
	RAS functions			Network diagnostics, internal loopback diagnostics, station detach function, automatic return function				
	Connection cable	e		Dedicated flat cable(0.75mm ²)	(4), VCTF cable, high flexible ca	ble		



Technical Information

CC-Link/LT network wiring specifications CC-Link/LT

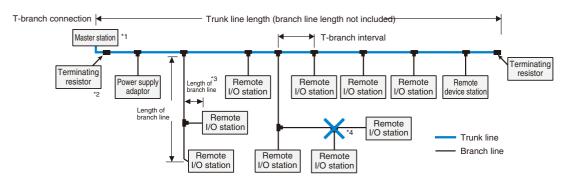

Item	Specifications			Remarks
Transmission speed	2.5Mbps	625 kbps	156kbps	_
Distance between stations		No restriction		-
Maximum number of modules on a branch line		8 modules		_
Length of trunk line	35m	35m 100 m 500m		Cable length between 2 terminating resistors (Branch line length not included)
T-branch interval		No restriction		-
Maximum length of branch line	4m 16 m 60m		60m	Cable length per branch line
Overall length of branch lines	15m 50 m 200m		200m	Total length of all branch lines

^{*1} Always install the master module at one end of the trunk line.

Precautions when mixed cables are used

- 1 Different types of cables cannot be used together in the trunk line.
- 2 Dedicated flat cables, VCTF cables and flexible cables can be used together for branch lines.

 *The wiring specifications do not change according to the used cables and mixed use of cables.
- 3 Different types of cables cannot be used together on the same branch line.
 *When the module with cable (e.g. CL1Y2-T1D2S) is used, it can be connected to a different type of cable by making sure the dedicated cables in within 20 cm.

^{*2} Install a terminating resistor near the master module (within 20 cm).

^{*3} The length of a line branched from a branch line is also included in the max. branch line length and overall branch line length.

^{*4} Up to two branch line levels can be configured. Three or more branch line levels cannot be configured.

CC-Link Partner Assosiation (CLPA) - Actively promoting worldwide adoption of CC-Link networks

Proactively supporting CC-Link, from promotion to specification development

The CC-Link Partner Association (CLPA) was established to promote the worldwide adoption of the CC-Link open-field network.By conducting promotional Activities such as organizing trade shows and seminars, conducting conformance fests, and providing catalogs, brochures and websaite information, CLPA activities are successfully increasing the number of CC-Link partner manufacturers and CC-Link compatible products. As such, CLPA is playing a major role in the globalization of CC-Link.







Trade show



Conformance testing lab

Visit the CLPA website for the latest CC-Link information.


URL: http://www.cc-link.org

6F Ozone Front Bldg. 3-15-58, Ozone, Kita-ku, Nagoya 462-0825 Japan TEL: +81-52-919-1588 / FAX: +81-52-916-8655 E-mail: info@cc-link.org



Global influence of CC-Link continues to spread

CC-Link is supported globally by CLPA. With offices throughout the world, support to for partner companies can be found locally. Each regional CLPA office undertakes various support and promotional activities to further the influence of the network in that part of the world. For companies looking to increase their presence in Asia, CLPA is well placed to assist these efforts through offices in all major Asian regions.

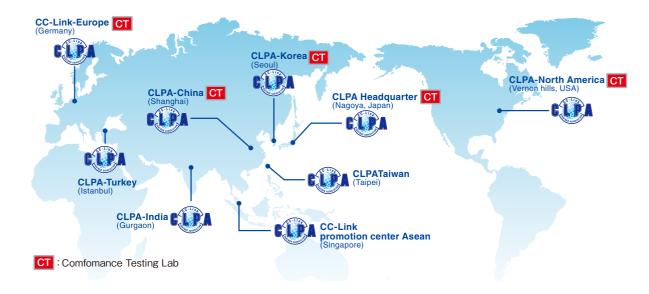



Related Product List

■Products

Develo	pment Application	Name	Model (for Ordering)	Packaging Unit	
CC-Link IE	Control station,	CC-Link IE Control Network PC Interface Board	Q80BD-J71GP21-SX Q81BD-J71GP21-SX	1 board	
Control	normal station	CC-Link IE Control Network PC Interface Board (with external power supply function)	Q80BD-J71GP21S-SX Q81BD-J71GP21S-SX	1 board	
		Source Code Development CD-ROM	SW1DNC-EFI210SRC	1 copy	
	Master station	·	NZ2GACP210-60	60 pieces	
		Dedicated Communication LSI CP210 (PC08003N)	NZ2GACP210-300	300 pieces	
CC-Link IE Field	Master station, local station	CC-Link IE Field Network PC Interface Board	Q80BD-J71GF11-T2	1 board	
			NZ2GACP220-60	60 pieces	
	Intelligent device station	Dedicated Communication LSI CP220 (PC08004N)	NZ2GACP220-300	300 pieces	
		CC-Link Ver.2 Built-In Interface Board	Q50BD-CCV2	1 board	
	Master station, local station, intelligent device station	CC-Link Ver.2 Object Development Kit CC-Link Ver.2 Object Development CD-ROM CC-Link Ver. 2 Object Development Reference Manual SH(NA)-080701ENG	SW1D5C-CCV2OBJ-E	1 set	
		D. II. 1. 10 1. II. 10 1. (D0000011.0)	A6GA-CCMFP1NN60F	60 pieces	
		Dedicated Communication LSI MFP1N (PC96002M-C)	A6GA-CCMFP1NN300F	300 pieces	
		Device Kit (Flash ROM X 1, CPLD X 2)	Q6KT-NPC2OG51	40 sets	
CC-Link	Master station, local station	CC-Link Ver. 2 PC Interface Board	Q80BD-J61BT11N Q81BD-J61BT11	1 board	
	Remote device station	Dedicated Communication LOLMEDON (DOCCOON)	A6GA-CCMFP3NN60F	60 pieces	
		Dedicated Communication LSI MFP3N (PC03003N)	A6GA-CCMFP3NN300F	300 pieces	
		D. II. I. I.O. III. I.O. MEDON (DOCCOON)	A6GA-CCMFP2NN60F	60 pieces	
		Dedicated Communication LSI MFP2N (PC03002N)	A6GA-CCMFP2NN300F	300 pieces	
		Dedicated Communication LSI MFP2AN (PC97007N)	A6GA-CCMFP2ANN60F	60 pieces	
		Dedicated Communication EST Wil 1 2714 (1 CS7 CO714)	A6GA-CCMFP2ANN300F	300 pieces	
	Remote I/O station		AJ65MBTL1N-16DT	1 piece	
			AJ65MBTL1N-16D		
		CC-Link Embedded I/O Adapter	AJ65MBTL1N-16T		
			AJ65MBTL1N-32D		
			AJ65MBTL1N-32T		
	Master station	Dedicated Communication LSI CLC13 (PC02003E-A)	CL2GA13-60	60 pieces	
	Remote device station	Dedicated Communication LSI CLC31 (PC02004N-A)	CL2GA31-60	60 pieces	
CC-Link/LT	Damata I/O station	Dedicated Communication LSI CLC21 (PC01003N)	CL2GA21-60	60 pieces	
	Remote I/O station	Dedicated Communication LSI CLC21 (PC01003N)	CL2GA21-300	300 pieces	

Manual

Deve	lopment Application	Title	Manual No.
CC-Link IE Control	Control station, normal station	CC-Link IE Q80BD-J71GP21-SX Driver Development Reference Manual	SH(NA)-080819ENG
CC-Link IE	Master station	CC-Link IE Field Network Source Code Development Master Station Communication LSI CP210 Reference Manual	SH(NA)-081455ENG
	Master station, local station	CC-Link IE Field Network Q80BD-J71GF11-T2/Q81BD-J71GF11-T2 Driver Development Reference Manual	SH(NA)-081155ENG
Field	Intelligent device station	CC-Link IE Field Network Intelligent Device Station Communication LSI CP220 Reference Manual	SH(NA)-081017ENG
	Master station, local station,	CC-Link Ver.2 Built-In Interface Board Reference Manual	SH(NA)-080700ENG
	intelligent device station	CC-Link Ver.2 Object Development Reference Manual	SH(NA)-080701ENG
CC-Link	Master station, local station	CC-Link Ver.2 Q80BD-J61BT11N Driver Development Reference Manual	SH(NA)-080702ENG
CC-LITIK	Remote device station	CC-Link Remote Device Station Communication LSI MFP3N Reference Manual	SH(NA)-080624ENG
		CC-Link Remote I/O Station Communication LSI MFP2N Reference Manual	SH(NA)-080622ENG
	Remote I/O station	CC-Link Remote I/O Station Communication LSI MFP2AN Reference Manual	SH(NA)-080623ENG
		CC-Link Embedded I/O Adapter User's Manual	SH(NA)-080324E
	Master station	CC-Link/LT Master Station Communication LSI CLC13 Reference Manual	SH(NA)-080703ENG
CC-Link/LT	Remote device station	CC-Link/LT Remote Device Station Communication LSI CLC31 Reference Manual	SH(NA)-080704ENG
	Remote I/O station	CC-Link/LT Remote I/O Station Communication LSI CLC21 Reference Manual	SH(NA)-080707ENG

CC-Línk **IE G**ontrol CC-Línk **IE F**ield CC-Link/LT

Warranty

Please confirm the following product warranty details before using the product.

Gratis Warranty Term and Gratis Warranty Range

If any faults or defects (hereinafter "Failure") found to be the responsibility of Mitsubishi occurs during use of the product within the gratis warranty term, the product shall be repaired [replaced for the dedicated communication LSI and device kit] at no cost via the sales representative or Mitsubishi Service Company.

However, if repairs are required onsite at domestic or overseas location, expenses to send an engineer will be solely at the customer's discretion. Mitsubishi shall not be held responsible for any re-commissioning, maintenance, or testing on-site that involves replacement of the failed product.

Gratis Warranty Term

The gratis warranty term of the product shall be for one(1) year after the date of purchase or delivery to a designated place. Note that after manufacture and shipment from Mitsubishi, the maximum distribution period shall be six (6) months, and the longest gratis warranty term after manufacturing shall be eighteen (18) months.

The gratis warranty term of repair parts shall not exceed the gratis warranty term before repairs.

■ Gratis Warranty Range

- (1) The range shall be limited to normal use within the usage state, usage methods and usage environment, etc., which follow the conditions and precautions, etc., given in the instruction manual, user's manual and caution labels on the product.
- (2) Even within the gratis warranty term, repairs [the cost of replacement for the dedicated communication LSI and device kit] shall be charged for in the following cases.
 - 1. Failure occurring from inappropriate storage or handling, carelessness or negligence by the user. Failure caused by the user's hardware or software design.
 - 2. Failure caused by unapproved modifications, etc., to the product by the user.
 - 3. When the Mitsubishi product is assembled into a user's device, Failure that could have been avoided if functions or structures, judged as necessary in the legal safety measures the user's device is subject to or as necessary by industry standards, had been provided.
 - 4. Failure caused by external irresistible forces such as fires or abnormal voltages, and Failure caused by force majeure such as earthquakes, lightning, wind and water damage.
 - 5. Failure caused by reasons unpredictable by scientific technology standards at time of shipment from Mitsubishi.
 - 6. Any other failure found not to be the responsibility of Mitsubishi or that admitted not to be so by the user.

Handling after discontinuation of production

- (1) Mitsubishi shall accept onerous product repairs for seven (7) years after production of the product is discontinued. Discontinuation of production shall be notified with Mitsubishi Technical Bulletins, etc.
- (2) Product supply (including repair parts) is not available after production is discontinued.

Customer service

- (1) When the cause of failure requires an investigation, Mitsubishi shall conduct the investigation using the product unit only. Please bring the product removed from the product to which it was incorporated to Mitsubishi. Mitsubishi will not conduct business travel in connection with the investigation.
- (2) Overseas, repairs shall be accepted [replacements shall be provided for the dedicated communication LSI and device kit] by Mitsubishi's local FA Centers. Note that the repair conditions [the conditions under which replacements are provided for the dedicated communication LSI and device kit] at each FA Center may differ.

Exclusion of loss in opportunity and secondary loss from warranty liability

Regardless of the gratis warranty term, Mitsubishi shall not be liable for compensation of damages caused by any cause found not to be the responsibility of Mitsubishi, loss in opportunity, lost profits incurred to the user by Failures of Mitsubishi products, special damages and secondary damages whether foreseeable or not, compensation for accidents, and compensation for damages to products other than Mitsubishi products, replacement by the user, maintenance of on-site equipment, start-up test run and other tasks.

Changes in product specifications

The specifications given in the catalogs, manuals or technical documents are subject to change without prior notice.

Conditions of use for the product

- (1) Mitsubishi product ("the PRODUCT") shall be used in onditions;
 - i) where any problem, fault or failure occurring in the PROD-UCT, if any, shall not lead to any major or serious accident;
 - ii) where the backup and fail-safe function are systematically or automatically provided outside of the PRODUCT for the case of any problem, fault or failure occurring in the PRODUCT.
- (2) The PRODUCT has been designed and manufactured for the purpose of being used in general industries.

MITSUBISHI SHALL HAVE NO RESPONSIBILITY OR LIABILITY (INCLUDING, BUT NOT LIMITED TO ANY AND ALL RESPONSIBIL-ITY OR LIABILITY BASED ON CONTRACT, WARRANTY, TORT, PRODUCT LIABILITY) FOR ANY INJURY OR DEATH TO PERSONS OR LOSS OR DAMAGE TO PROPERTY CAUSED BY the PROD-UCT THAT ARE OPERATED OR USED IN APPLICATION NOT INTENDED OR EXCLUDED BY INSTRUCTIONS, PRECAUTIONS, OR WARNING ONTAINED IN MITSUBISHI'S USER, INSTRUCTION AND/OR SAFETY MANUALS, TECHNICAL BULLETINS AND GUIDELINES FOR the PRODUCT.

("Prohibited Application")

Prohibited Applications include, but not limited to, the use of the PRODUCT in;

- Nuclear Power Plants and any other power plants operated by Power companies, and/or any other cases in which the public could be affected if any problem or fault occurs in the PROD-
- Railway companies or Public service purposes, and/or any other cases in which establishment of a special quality assurance system is required by the Purchaser or End User.
- Aircraft or Aerospace, Medical applications, Train equipment, transport equipment such as Elevator and Escalator, Incinera-tion and Fuel devices, Vehicles, Manned transportation, Equip-ment for Recreation and Amusement, and Safety devices, handling of Nuclear or Hazardous Materials or Chemicals, Mining and Drilling, and/or other applications where there is a significant risk of injury to the public or property.

Notwithstanding the above, restrictions Mitsubishi may in its sole discretion, authorize use of the PRODUCT in one or more of the Prohibited Applications, provided that the usage of the PRODUCT is limited only for the specific applications agreed to by Mitsubishi and provided further that no special quality assurance or fail-safe, redundant or other safety features which exceed the general specifications of the PRODUCTs are required. For details, please contact the Mitsubishi representative in your region.



Memo	

Precautions before use

This publication explains the typical features and functions of the products herein and does not provide restrictions and other information related to usage and module combinations. Before using the products, always read the product user manuals. Mitsubishi Electric will not be held liable for damage caused by factors found not to be the cause of Mitsubishi Electric; opportunity loss or lost profits caused by faults in Mitsubishi Electric products; damage, secondary damage, or accident compensation, whether foreseeable or not, caused by special factors; damage to products other than Mitsubishi Electric products; and to other duties.

⚠ For safe use

- \bullet To use the products given in this publication properly, always read the relevant manuals before use.
- The products have been manufactured as general-purpose parts for general industries, and have not been designed or manufactured to be incorporated in a device or system used in purposes related to human life.
- Before using the products for special purposes such as nuclear power, electric power, aerospace, medicine or passenger movement vehicles, consult with Mitsubishi.
- The products have been manufactured under strict quality control. However, when installing the products where major accidents or losses could occur if the products fail, install appropriate backup or fail-safe functions in the system.

Open Field Network

CC-Link Family Compatible Product Development Guidebook

Country/Region	Sales office	Tel/Fax
USA	MITSUBISHI ELECTRIC AUTOMATION, INC. 500 Corporate Woods Parkway, Vernon Hills, IL 60061, U.S.A.	Tel: +1-847-478-2100 Fax: +1-847-478-2253
Mexico	MITSUBISHI ELECTRIC AUTOMATION, INC. Mexico Branch Mariano Escobedo #69, Col. Zona Industrial, Tlalnepantla Edo, C.P.54030, Mexico	Tel: +52-55-3067-7500
Brazil	MITSUBISHI ELECTRIC DO BRASIL COMÉRCIO E SERVIÇOS LTDA. Rua Jussara, 1750-Bloco B Anexo, Jardim Santa Cecilia, CEP 06465-070, Barueri-SP, Brasil	Tel: +55-11-4689-3000 Fax: +55-11-4689-3016
Germany	MITSUBISHI ELECTRIC EUROPE B.V. German Branch Gothaer Strasse 8, D-40880 Ratingen, Germany	Tel: +49-2102-486-0 Fax: +49-2102-486-1120
UK	MITSUBISHI ELECTRIC EUROPE B.V. UK Branch Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, U.K.	Tel: +44-1707-28-8780 Fax: +44-1707-27-8695
Ireland	MITSUBISHI ELECTRIC EUROPE B.V. Irish Branch Westgate Business Park, Ballymount, IRL-Dublin 24, Ireland	Tel : +353-1-4198800 Fax : +353-1-4198890
Italy	MITSUBISHI ELECTRIC EUROPE B.V. Italian Branch Centro Direzionale Colleoni-Palazzo Sirio Viale Colleoni 7, 20864 Agrate Brianza(Milano) Italy	Tel: +39-039-60531 Fax: +39-039-6053-312
Spain	MITSUBISHI ELECTRIC EUROPE, B.V. Spanish Branch Carretera de Rubí, 76-80-Apdo. 420, 08173 Sant Cugat del Vallés (Barcelona), Spain	Tel : +34-935-65-3131 Fax : +34-935-89-1579
France	MITSUBISHI ELECTRIC EUROPE B.V. French Branch 25, Boulevard des Bouvets, F-92741 Nanterre Cedex, France	Tel: +33-1-55-68-55-68 Fax: +33-1-55-68-57-57
Czech Republic	MITSUBISHI ELECTRIC EUROPE B.V. Czech Branch Avenir Business Park, Radlicka 751/113e, 158 00 Praha5, Czech Republic	Tel : +420-251-551-470 Fax : +420-251-551-471
Poland	MITSUBISHI ELECTRIC EUROPE B.V. Polish Branch ul. Krakowska 50, 32-083 Balice, Poland	Tel : +48-12-630-47-00 Fax : +48-12-630-47-01
Sweden	MITSUBISHI ELECTRIC EUROPE B.V. (Scandinavia) Fjelievägen 8, SE-22736 Lund, Sweden	Tel: +46-8-625-10-00 Fax: +46-46-39-70-18
Russia	MITSUBISHI ELECTRIC EUROPE B.V. Russian Branch St. Petersburg office Piskarevsky pr. 2, bld 2, lit "Sch", BC "Benua", office 720; RU-195027 St. Petersburg, Russia	Tel : +7-812-633-3497 Fax : +7-812-633-3499
Turkey	MITSUBISHI ELECTRIC TURKEY A.Ş Ümraniye Branch Serifali Mahallesi Nutuk Sokak No:5, TR-34775 Umraniye, Istanbul, Turkey	Tel: +90-216-526-3990 Fax: +90-216-526-3995
Dubai	MITSUBISHI ELECTRIC EUROPE B.V. Dubai Branch Dubai Silicon Oasis, P.O.BOX 341241, Dubai, U.A.E.	Tel : +971-4-3724716 Fax : +971-4-3724721
South Africa	ADROIT TECHNOLOGIES 20 Waterford Office Park, 189 Witkoppen Road, Fourways, Johannesburg, South Africa	Tel : +27-11-658-8100 Fax : +27-11-658-8101
China	MITSUBISHI ELECTRIC AUTOMATION (CHINA) LTD. No.1386 Hongqiao Road, Mitsubishi Electric Automation Center, Shanghai, China	Tel: +86-21-2322-3030 Fax: +86-21-2322-3000
Taiwan	SETSUYO ENTERPRISE CO., LTD. 6F, No.105, Wugong 3rd Road, Wugu District, New Taipei City 24889, Taiwan, R.O.C.	Tel: +886-2-2299-2499 Fax: +886-2-2299-2509
Korea	MITSUBISHI ELECTRIC AUTOMATION KOREA CO., LTD. 7F-9F, Gangseo Hangang Xi-tower A, 401, Yangcheon-ro, Gangseo-Gu, Seoul 157-801, Korea	Tel: +82-2-3660-9530 Fax: +82-2-3664-8372
Singapore	MITSUBISHI ELECTRIC ASIA PTE. LTD. 307, Alexandra Road, Mitsubishi Electric Building, Singapore 159943	Tel : +65-6473-2308 Fax : +65-6476-7439
Thailand	MITSUBISHI ELECTRIC FACTORY AUTOMATION (THAILAND) CO., LTD. 12th Floor, SV.City Building, Office Tower 1, No. 896/19 and 20 Rama 3 Road, Kwaeng Bangpongpang, Khet Yannawa, Bangkok 10120, Thailand	Tel: +66-2682-6522 Fax: +66-2682-6020
Vietnam	MITSUBISHI ELECTRIC VIETNAM COMPANY LIMITED Hanoi Branch 6-Floor, Detech Tower, 8 Ton That Thuyet Street, My Dinh 2 Ward, Nam Tu Liem District, Hanoi, Vietnam	Tel: +84-4-3937-8075 Fax: +84-4-3937-8076
Indonesia	PT. MITSUBISHI ELECTRIC INDONESIA Gedung Jaya 11th Floor, JL. MH. Thamrin No.12, Jakarta Pusat 10340, Indonesia	Tel : +62-21-3192-6461 Fax : +62-21-3192-3942
India	MITSUBISHI ELECTRIC INDIA PVT. LTD. Pune Branch Emerald House, EL-3, J Block, M.I.D.C Bhosari, Pune-411026, Maharashtra, India	Tel : +91-20-2710-2000 Fax : +91-20-2710-2100
Australia	MITSUBISHI ELECTRIC AUSTRALIA PTY. LTD. 348 Victoria Road, P.O. Box 11, Rydalmere, N.S.W 2116, Australia	Tel : +61-2-9684-7777 Fax : +61-2-9684-7245

Mitsubishi Electric Corporation Nagoya Works is a factory certified for ISO 14001 (standards for environmental management systems) and ISO 9001(standards for quality assurance management systems)





MITSUBISHI ELECTRIC CORPORATION

HEAD OFFICE: TOKYO BLDG., 2-7-3, MARUNOUCHI, CHIYODA-KU, TOKYO 100-8310, JAPAN

www.MitsubishiElectric.com