## SIEMENS

## Data sheet

## 3RT6023-1AL20



Contactor AC 230 V 50/60 HZ AC3 4 kW 400 V AUX contacts 1 NO +1 NC 3-pole, size S0 screw terminal


product brand name	SIRIUS	
product designation	Power contactor	
product type designation	3RT6	
General technical data		
size of contactor	S0	
product extension auxiliary switch	Yes	
insulation voltage rated value	690 V	
degree of pollution	3	
surge voltage resistance rated value	6 kV	
maximum permissible voltage for safe isolation between coil and main contacts acc. to EN 60947-1	400 V	
shock resistance at rectangular impulse		
• at AC	7,5g / 5 ms, 4,7g / 10 ms	
shock resistance with sine pulse		
• at AC	11,8g / 5 ms, 7,4g / 10 ms	
mechanical service life (switching cycles)		
<ul> <li>of contactor typical</li> </ul>	10 000 000	
of the contactor with added auxiliary switch block     typical	10 000 000	
Substance Prohibitance (Date)	01.05.2012 00:00:00	
Ambient conditions		
installation altitude at height above sea level maximum	2 000 m	
ambient temperature		
<ul> <li>during operation</li> </ul>	-25 +60 °C	
<ul> <li>during storage</li> </ul>	-55 +80 °C	
Main circuit		
number of poles for main current circuit	3	
number of NO contacts for main contacts	3	
number of NC contacts for main contacts	0	
operating voltage at AC-3 rated value maximum	690 V	
operational current		
• at AC-1 up to 690 V		
- at ambient temperature 40 °C rated value	40 A	
- at ambient temperature 60 °C rated value	35 A	
• at AC-3		
— at 400 V rated value	9 A	
— at 690 V rated value	9 A	
connectable conductor cross-section in main circuit		


at AC-1	
• at 60 °C minimum permissible	10 mm <sup>2</sup>
• at 40 °C minimum permissible	10 mm <sup>2</sup>
operational current for approx. 200000 operating cycles at AC-4	
<ul> <li>at 400 V rated value</li> </ul>	4.1 A
<ul> <li>at 690 V rated value</li> </ul>	3.3 A
operating power	
● at AC-1	
— at 230 V rated value	13.3 kW
— at 230 V at 60 °C rated value	13.3 kW
— at 400 V at 60 °C rated value	23 kW
— at 690 V at 60 °C rated value	40 kW
• at AC-3	
— at 230 V rated value	2.2 kW
— at 400 V rated value	4 kW
— at 690 V rated value	7.5 kW
operating power for approx. 200000 operating cycles	
at AC-4	
• at 400 V rated value	2 kW
• at 690 V rated value	2.5 kW
no-load switching frequency	
• at AC	5 000 1/h
operating frequency	
<ul> <li>at AC-1 maximum</li> </ul>	1 000 1/h
<ul> <li>at AC-3 maximum</li> </ul>	1 000 1/h
• at AC-4 maximum	300 1/h
Control circuit/ Control	
type of voltage of the control supply voltage	AC
control supply voltage at AC	
control supply voltage at AC	
• at 50 Hz rated value	230 V
<ul><li>at 50 Hz rated value</li><li>at 60 Hz rated value</li></ul>	230 V 230 V
at 50 Hz rated value     at 60 Hz rated value     operating range factor control supply voltage rated     value of magnet coil at AC	230 V
<ul> <li>at 50 Hz rated value</li> <li>at 60 Hz rated value</li> <li>operating range factor control supply voltage rated value of magnet coil at AC</li> <li>at 50 Hz</li> </ul>	230 V 0.8 1.1
<ul> <li>at 50 Hz rated value</li> <li>at 60 Hz rated value</li> </ul> operating range factor control supply voltage rated value of magnet coil at AC <ul> <li>at 50 Hz</li> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul>	230 V
at 50 Hz rated value     at 60 Hz rated value  operating range factor control supply voltage rated value of magnet coil at AC      at 50 Hz     at 60 Hz  apparent pick-up power of magnet coil at AC	230 V 0.8 1.1 0.85 1.1
<ul> <li>at 50 Hz rated value</li> <li>at 60 Hz rated value</li> <li>operating range factor control supply voltage rated value of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>apparent pick-up power of magnet coil at AC</li> <li>at 50 Hz</li> </ul>	230 V 0.8 1.1 0.85 1.1 68 V·A
<ul> <li>at 50 Hz rated value</li> <li>at 60 Hz rated value</li> </ul> operating range factor control supply voltage rated value of magnet coil at AC <ul> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul> apparent pick-up power of magnet coil at AC <ul> <li>at 50 Hz</li> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul>	230 V 0.8 1.1 0.85 1.1
<ul> <li>at 50 Hz rated value</li> <li>at 60 Hz rated value</li> <li>operating range factor control supply voltage rated value of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>at 50 Hz</li> <li>at 50 Hz</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>at 60 Hz</li> </ul>	230 V 0.8 1.1 0.85 1.1 68 V·A 67 V·A
<ul> <li>at 50 Hz rated value</li> <li>at 60 Hz rated value</li> <li>operating range factor control supply voltage rated value of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>at 60 Hz</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul>	230 V 0.8 1.1 0.85 1.1 68 V·A 67 V·A 0.72
<ul> <li>at 50 Hz rated value</li> <li>at 60 Hz rated value</li> <li>operating range factor control supply voltage rated value of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>apparent pick-up power of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>at 60 Hz</li> <li>at 60 Hz</li> </ul>	230 V 0.8 1.1 0.85 1.1 68 V·A 67 V·A
<ul> <li>at 50 Hz rated value         <ul> <li>at 60 Hz rated value</li> </ul> </li> <li>operating range factor control supply voltage rated value of magnet coil at AC         <ul> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul> </li> <li>apparent pick-up power of magnet coil at AC         <ul> <li>at 50 Hz</li> <li>at 50 Hz</li> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul> </li> <li>at 50 Hz         <ul> <li>at 60 Hz</li> <li>at 60 Hz</li> <li>at 60 Hz</li> <li>at 60 Hz</li> </ul> </li> <li>at 60 Hz</li> <li>at 60 Hz</li> <li>at 60 Hz</li> <li>at 60 Hz</li> </ul> <li>apparent holding power of magnet coil at AC</li>	230 V 0.8 1.1 0.85 1.1 68 V·A 67 V·A 0.72 0.74
<ul> <li>at 50 Hz rated value</li> <li>at 60 Hz rated value</li> <li>operating range factor control supply voltage rated value of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>at 60 Hz</li> <li>inductive power factor with closing power of the coil</li> <li>at 60 Hz</li> <li>at 60 Hz</li> <li>at 60 Hz</li> <li>at 60 Hz</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul>	230 V 0.8 1.1 0.85 1.1 68 V·A 67 V·A 0.72 0.74 7.9 V·A
<ul> <li>at 50 Hz rated value</li> <li>at 60 Hz rated value</li> <li>operating range factor control supply voltage rated value of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>apparent pick-up power of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>inductive power factor with closing power of the coil</li> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul> apparent holding power of magnet coil at AC <ul> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul>	230 V 0.8 1.1 0.85 1.1 68 V·A 67 V·A 0.72 0.74
<ul> <li>at 50 Hz rated value</li> <li>at 60 Hz rated value</li> <li>operating range factor control supply voltage rated value of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>apparent pick-up power of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>inductive power factor with closing power of the coil</li> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul> apparent holding power of magnet coil at AC <ul> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul>	230 V 0.8 1.1 0.85 1.1 68 V·A 67 V·A 0.72 0.74 7.9 V·A 6.5 V·A
<ul> <li>at 50 Hz rated value</li> <li>at 60 Hz rated value</li> <li>operating range factor control supply voltage rated value of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>apparent pick-up power of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>inductive power factor with closing power of the coil</li> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul> apparent holding power of magnet coil at AC <ul> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul>	230 V 0.8 1.1 0.85 1.1 68 V·A 67 V·A 0.72 0.74 7.9 V·A
<ul> <li>at 50 Hz rated value</li> <li>at 60 Hz rated value</li> <li>operating range factor control supply voltage rated value of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>apparent pick-up power of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>at 60 Hz</li> <li>at 60 Hz</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul>	230 V 0.8 1.1 0.85 1.1 68 V·A 67 V·A 0.72 0.74 7.9 V·A 6.5 V·A 0.25
<ul> <li>at 50 Hz rated value</li> <li>at 60 Hz rated value</li> <li>operating range factor control supply voltage rated value of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>at 50 Hz</li> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul> inductive power factor with closing power of the coil <ul> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul> apparent holding power of magnet coil at AC <ul> <li>at 60 Hz</li> </ul> inductive power factor with the holding power of the coil <ul> <li>at 60 Hz</li> </ul> inductive power factor with the holding power of the coil <ul> <li>at 60 Hz</li> </ul> i at 60 Hz <ul> <li>at 60 Hz</li> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul> i at 60 Hz <ul> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul> i at 60 Hz <ul> <li>at 60 Hz</li> </ul> i at 60 Hz <ul> <li>at 60 Hz</li> </ul> i at 60 Hz <ul> <li>at 60 Hz</li> </ul> i at 60 Hz <ul> <li>at 60 Hz</li> </ul> i at 60 Hz <ul> <li>at 60 Hz</li> </ul> i at 60 Hz <ul> <li>at 60 Hz</li> </ul> i at 60 Hz <ul> <li>at 60 Hz</li> </ul> i at 60 Hz <ul> <li>at 60 Hz</li> </ul> i at 60 Hz <ul> <li>at 60 Hz</li> </ul> i at 60 Hz <ul> <li>at 60 Hz</li> </ul> i at 60 Hz <ul> <li>at 60 Hz</li> </ul> i at 60 Hz <ul> <li>at 60 Hz</li> </ul> i at 60 Hz <ul> <li>at 60 Hz</li> </ul> i at 60 Hz <ul> <li>at 60 Hz</li> </ul> i at 60 Hz <ul> <li>at 60 Hz</li> </ul> i at 60 Hz <ul> <li>at 60 Hz</li> </ul> i at 60 Hz <ul> <li>at 60 Hz</li> </ul> i at 60 Hz <ul> <li>at 60 Hz</li> </ul> i at 60 Hz <ul> <li>at 60 Hz</li> </ul> i at 60 Hz <ul> <li>at 60 Hz</li> </ul> i at 60 Hz <ul> <li>at 60 Hz</li> </ul> i at 60 Hz <ul> <li>at 60 Hz</li> </ul> i at 60 Hz <ul> <li>at 60 Hz</li> </ul> i at 60 Hz <ul> <li>at 60 Hz</li> </ul> i at 60 Hz <ul> <li>at 60 Hz</li> </ul> i at 60 Hz <ul> <li>at 60 Hz</li> </ul> i at 60 Hz <ul> <li>at 60 Hz</li> </ul> i	230 V 0.8 1.1 0.85 1.1 68 V·A 67 V·A 0.72 0.74 7.9 V·A 6.5 V·A 0.25
<ul> <li>at 50 Hz rated value</li> <li>at 60 Hz rated value</li> <li>operating range factor control supply voltage rated value of magnet coil at AC <ul> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul> </li> <li>apparent pick-up power of magnet coil at AC <ul> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul> </li> <li>at 60 Hz</li> <li>at 60 Hz</li> </ul> <li>at 60 Hz <ul> <li>at 60 Hz</li> <li>at 60 Hz</li> </ul> </li> <li>at 60 Hz</li> <li>at 60 Hz</li> <li>at 60 Hz</li> <li>at 60 Hz</li> <li>at 50 Hz <ul> <li>at 60 Hz</li> </ul> </li> <li>at 60 Hz</li> <li>at 60 Hz</li> <li>at 50 Hz <ul> <li>at 60 Hz</li> </ul> </li> <li>at 50 Hz <ul> <li>at 60 Hz</li> </ul> </li> <li>at 50 Hz <ul> <li>at 60 Hz</li> </ul> </li> <li>at 50 Hz <ul> <li>at 60 Hz</li> </ul> </li> <li>at 60 Hz</li> <li>at 60 Hz</li> <li>at 60 Hz</li> <li>at 60 Hz <ul> <li>at 60 Hz</li> </ul> </li> <li>at 60 Hz</li>	230 V 0.8 1.1 0.85 1.1 68 V·A 67 V·A 0.72 0.74 7.9 V·A 6.5 V·A 0.25 0.28
<ul> <li>at 50 Hz rated value</li> <li>at 60 Hz rated value</li> <li>operating range factor control supply voltage rated value of magnet coil at AC <ul> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul> </li> <li>apparent pick-up power of magnet coil at AC <ul> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul> </li> <li>at 60 Hz</li> <li>at 60 Hz</li> </ul> <li>at 60 Hz <ul> <li>at 60 Hz</li> <li>at 60 Hz</li> </ul> </li> <li>at 60 Hz</li> <li>at 60 Hz</li> <li>at 60 Hz</li> <li>at 60 Hz</li> <li>at 50 Hz <ul> <li>at 60 Hz</li> </ul> </li> <li>at 60 Hz</li> <li>at 50 Hz <ul> <li>at 60 Hz</li> </ul> </li> <li>at 50 Hz <ul> <li>at 60 Hz</li> </ul> </li> <li>at 50 Hz <ul> <li>at 60 Hz</li> </ul> </li> <li>at 50 Hz <ul> <li>at 60 Hz</li> </ul> </li> <li>at 50 Hz <ul> <li>at 60 Hz</li> </ul> </li> <li>at 60 Hz</li> <li>at 60 Hz <ul> <li>at 60 Hz</li> </ul> </li> <li>at 60 Hz</li> <li>at 60 Hz</li> <li>at 60 Hz</li> <li>at 60 Hz <ul> <li>at 60 Hz</li> <li>at 60 Hz</li> </ul> </li> <li>at 60 Hz</li>	230 V 0.8 1.1 0.85 1.1 68 V·A 67 V·A 0.72 0.74 7.9 V·A 6.5 V·A 0.25 0.28 1
<ul> <li>at 50 Hz rated value</li> <li>at 60 Hz rated value</li> <li>operating range factor control supply voltage rated value of magnet coil at AC <ul> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul> </li> <li>apparent pick-up power of magnet coil at AC <ul> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul> </li> <li>at 60 Hz</li> <li>at 60 Hz</li> </ul> <li>at 60 Hz <ul> <li>at 60 Hz</li> </ul> </li> <li>at 60 Hz</li> <li>at 60 Hz</li> <li>at 60 Hz <ul> <li>at 60 Hz</li> </ul> </li> <li>at 60 Hz</li> <li>at 60 Hz</li> <li>apparent holding power of magnet coil at AC <ul> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul> </li> <li>at 60 Hz</li> <li>apparent holding power of magnet coil at AC <ul> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul> </li> <li>at 60 Hz</li> <li>outcive power factor with the holding power of the coil <ul> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul> </li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>at 60 Hz</li> <li>at 50 Hz</li> <li>at 60 Hz</li>	230 V 0.8 1.1 0.85 1.1 68 V·A 67 V·A 0.72 0.74 7.9 V·A 6.5 V·A 0.25 0.28 1 1
<ul> <li>at 50 Hz rated value</li> <li>at 60 Hz rated value</li> <li>operating range factor control supply voltage rated value of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul> apparent pick-up power of magnet coil at AC <ul> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul> inductive power factor with closing power of the coil <ul> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul> apparent holding power of magnet coil at AC <ul> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul> apparent holding power of magnet coil at AC <ul> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul> at 60 Hz <ul> <li>at 60 Hz</li> </ul> at 60 Hz <ul> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul> at 60 Hz <ul> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul> at 60 Hz <ul> <li>at 60 Hz</li> </ul> inductive power factor with the holding power of the coil <ul> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul> inductive power factor with the holding power of the coil <ul> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul> inductive power factor with the nolding power of the coil <ul> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul> inductive power factor with the nolding power of the coil <ul> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul> inductive power factor with the nolding power of the coil <ul> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul> inductive power factor with the nolding power of the coil <ul> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul> inductive power factor with the nolding power of the coil <ul> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul>	230 V 0.8 1.1 0.85 1.1 68 V·A 67 V·A 0.72 0.74 7.9 V·A 6.5 V·A 0.25 0.28 1 1
<ul> <li>at 50 Hz rated value</li> <li>at 60 Hz rated value</li> <li>operating range factor control supply voltage rated value of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>apparent pick-up power of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>at 60 Hz</li> <li>at 60 Hz</li> <li>at 60 Hz</li> <li>apparent holding power of magnet coil at AC <ul> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul> </li> <li>at 60 Hz</li> <li>apparent holding power of magnet coil at AC <ul> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul> </li> <li>at 60 Hz</li> <li>apparent holding power of magnet coil at AC <ul> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul> </li> <li>at 60 Hz</li> <li>at 60 Hz</li> </ul> <li>at 50 Hz <ul> <li>at 60 Hz</li> </ul> </li> <li>at 60 Hz</li> <li>operational current at AC-12 maximum</li> <li>operational current at AC-15</li>	230 V 0.8 1.1 0.85 1.1 68 V·A 67 V·A 0.72 0.74 7.9 V·A 6.5 V·A 0.25 0.28 1 1 1 1 10 A
<ul> <li>at 50 Hz rated value</li> <li>at 60 Hz rated value</li> <li>operating range factor control supply voltage rated value of magnet coil at AC <ul> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul> </li> <li>apparent pick-up power of magnet coil at AC <ul> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul> </li> <li>at 60 Hz</li> <li>at 60 Hz</li> </ul> <li>at 60 Hz <ul> <li>at 60 Hz</li> <li>at 60 Hz</li> </ul> </li> <li>apparent holding power of magnet coil at AC <ul> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul> </li> <li>at 60 Hz</li> <li>apparent holding power of magnet coil at AC <ul> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul> </li> <li>at 50 Hz <ul> <li>at 60 Hz</li> </ul> </li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>at 50 Hz <ul> <li>at 60 Hz</li> </ul> </li> <li>at 60 Hz</li> <li>at 60 Hz</li> <li>at 60 Hz</li> <li>operational current at AC-12 maximum</li> <li>operational current at AC-15 <ul> <li>at 230 V rated value</li> </ul></li>	230 V 0.8 1.1 0.85 1.1 68 V·A 67 V·A 0.72 0.74 7.9 V·A 6.5 V·A 0.25 0.28 1 1 10 A 10 A


operational current at DC-12	
<ul> <li>at 24 V rated value</li> </ul>	6 A
<ul> <li>at 110 V rated value</li> </ul>	3 A
at 220 V rated value	1 A
operational current at DC-13	
<ul> <li>at 24 V rated value</li> </ul>	6 A
<ul> <li>at 110 V rated value</li> </ul>	1 A
at 220 V rated value	0.3 A
contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)
hort-circuit protection	
design of the fuse link	
<ul> <li>for short-circuit protection of the main circuit</li> </ul>	
<ul> <li>— with type of coordination 1 required</li> </ul>	gL/gG LV HRC 3NA, DIAZED 5SB, NEOZED 5SE: 63 A
<ul> <li>— with type of assignment 2 required</li> </ul>	gL/gG LV HRC 3NA, DIAZED 5SB, NEOZED 5SE: 25 A
<ul> <li>for short-circuit protection of the auxiliary switch</li> </ul>	fuse gL/gG: 10 A
required	
nstallation/ mounting/ dimensions	
mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface
fastening method	screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022
side-by-side mounting	Yes
height	85 mm
width	45 mm
depth	97 mm
required spacing with side-by-side mounting at the side	0 mm
connections/ Terminals	
type of electrical connection	
• for main current circuit	screw-type terminals
for auxiliary and control circuit	screw-type terminals
type of connectable conductor cross-sections	
for main contacts	$2x/(1 - 2Emm^2) - 2x/(2E - 10mm^2)$
<ul> <li>— solid or stranded</li> <li>finally stranded with core and processing</li> </ul>	$2x (1 2,5 mm^2), 2x (2,5 10 mm^2)$ $2x (1 2,5 mm^2), 2x (2,5 6 mm^2), 1x 10 mm^2$
<ul> <li>finely stranded with core end processing</li> <li>at AWG cables for main contacts</li> </ul>	2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup>
	2x (16 12), 2x (14 8)
<ul> <li>type of connectable conductor cross-sections</li> <li>for auxiliary contacts</li> </ul>	
solid or stranded	2x (0,5 1,5 mm²), 2x (0,75 2,5 mm²)
— finely stranded with core end processing	2x (0.5 1,5 mm²), 2x (0.75 2,5 mm²) 2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
at AWG cables for auxiliary contacts	2x (0.0 1.5 mm), 2x (0.75 2.5 mm) 2x (20 16), 2x (18 14)
÷	24 (20 10), 24 (10 14)
afety related data	Vac
product function mirror contact acc. to IEC 60947-4-1	Yes
protection class IP on the front acc. to IEC 60529	IP20 finger safe, for vertical contact from the front
touch protection on the front acc. to IEC 60529	finger-safe, for vertical contact from the front
Certificates/ approvals	
General Product Approval	EMC Declaration of Conformity
(J) (J) (R)	) <b>FAF</b> / <b>C</b> E
	RCM EG-Konf.
other	
Confirmation	


Further information


Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/products?pnid=16027&lc=en-CN







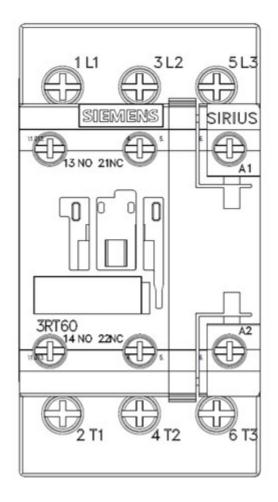

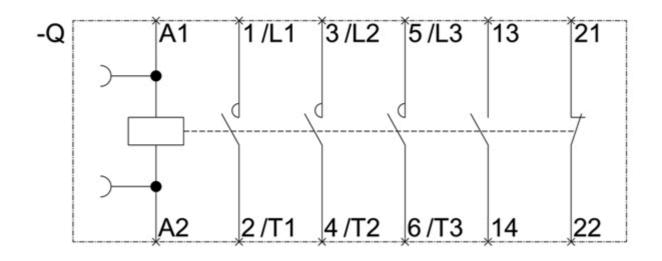

last modified:

12/15/2020 🖸