


# Technical Information

## Levelflex FMP53

Guided wave radar

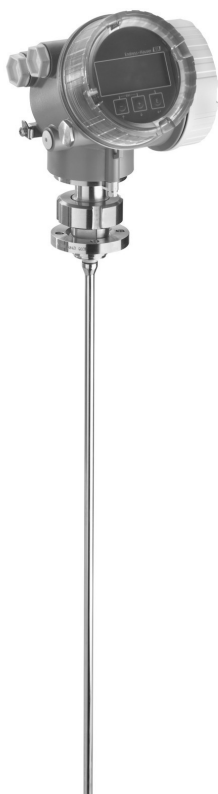

### Level measurement in hygienic applications

#### Application

- Rod probe
- Process connections for hygiene requirements (Tri-Clamp, 11851, 11864, NEUMO, Varivent N, SMS)
- Temperature: -20 to +150 °C (-4 to +302 °F)
- Pressure: -1 to +16 bar (-14.5 to +232 psi)
- Maximum measuring range: Rod 6 m (20 ft)
- Accuracy: ±2 mm (±0.08 in)
- International explosion protection certificates; WHG; EN10204-3.1; EHEDG; 3-A; CoC ASME-BPE
- Linearity protocol (3-point, 5-point)

#### Your benefits

- Reliable measurement even for changing product and process conditions
- HistoROM data management for easy commissioning, maintenance and diagnostics
- Highest reliability due to Multi-Echo Tracking
- Hardware and software developed according to IEC 61508 (up to SIL3)
- Seamless integration into control or asset management systems
- Intuitive user interface in national languages
- Easy proof test for SIL and WHG

## Table of contents





<b>Important document information</b> . . . . .	<b>4</b>	Process pressure range . . . . .	47
Symbols . . . . .	4	Dielectric constant (DC) . . . . .	47
<b>Function and system design</b> . . . . .	<b>6</b>	<b>Mechanical construction</b> . . . . .	<b>48</b>
Measuring principle . . . . .	6	Dimensions . . . . .	48
Measuring system . . . . .	9	Tolerance of probe length . . . . .	54
<b>Input</b> . . . . .	<b>10</b>	Weight . . . . .	55
Measured variable . . . . .	10	Materials: GT19 housing . . . . .	56
Measuring range . . . . .	10	Materials: GT20 housing . . . . .	57
Blocking distance . . . . .	11	Materials: Process connection . . . . .	59
Measuring frequency spectrum . . . . .	11	Materials: Probe . . . . .	60
<b>Output</b> . . . . .	<b>12</b>	Materials: Mounting bracket . . . . .	61
Output signal . . . . .	12	Materials: Adapter and cable for remote display . . . . .	62
Signal on alarm . . . . .	13	Materials: Weather protection cover . . . . .	63
Linearization . . . . .	13	<b>Operability</b> . . . . .	<b>64</b>
Galvanic isolation . . . . .	13	Operating concept . . . . .	64
Protocol-specific data . . . . .	14	Local operation . . . . .	64
<b>Energieversorgung</b> . . . . .	<b>19</b>	Operation with remote display and operating module	
Terminal assignment . . . . .	19	FHX50 . . . . .	65
Device plug connectors . . . . .	26	Remote operation . . . . .	65
Power supply . . . . .	27	Integration in tank gauging system . . . . .	69
Power consumption . . . . .	29	System integration via Fieldgate . . . . .	70
Current consumption . . . . .	29	<b>Certificates and approvals</b> . . . . .	<b>71</b>
Power supply failure . . . . .	30	CE mark . . . . .	71
Potential equalization . . . . .	30	C-Tick symbol . . . . .	71
Terminals . . . . .	30	Ex approval . . . . .	71
Cable entries . . . . .	30	Dual seal according to ANSI/ISA 12.27.01 . . . . .	71
Cable specification . . . . .	30	Functional Safety . . . . .	71
Overvoltage protection . . . . .	31	Overfill prevention . . . . .	71
<b>Performance characteristics</b> . . . . .	<b>32</b>	Sanitary compatibility . . . . .	72
Reference operating conditions . . . . .	32	Pharma (CoC) . . . . .	72
Maximum measured error . . . . .	32	Telecommunications . . . . .	72
Resolution . . . . .	33	Track record . . . . .	72
Reaction time . . . . .	33	Test, Certificate . . . . .	73
Influence of ambient temperature . . . . .	33	Other standards and guidelines . . . . .	74
<b>Mounting</b> . . . . .	<b>34</b>	<b>Ordering information</b> . . . . .	<b>75</b>
Mounting requirements . . . . .	34	Ordering information . . . . .	75
<b>Operating conditions: Environment</b> . . . . .	<b>44</b>	3-point linearity protocol . . . . .	76
Ambient temperature range . . . . .	44	5-point linearity protocol . . . . .	77
Ambient temperature limits . . . . .	44	Customized parametrization . . . . .	78
Storage temperature . . . . .	46	<b>Accessories</b> . . . . .	<b>79</b>
Climate class . . . . .	46	Device-specific accessories . . . . .	79
Altitude according to IEC61010-1 Ed.3 . . . . .	46	Communication-specific accessories . . . . .	84
Degree of protection . . . . .	46	Service-specific accessories . . . . .	85
Vibration resistance . . . . .	46	System components . . . . .	85
Cleaning the probe . . . . .	46	<b>Documentation</b> . . . . .	<b>86</b>
Electromagnetic compatibility (EMC) . . . . .	46	Standard documentation . . . . .	86
<b>Process</b> . . . . .	<b>47</b>	Supplementary documentation . . . . .	86
Process temperature range . . . . .	47	Safety documentation . . . . .	87
		<b>Registered trademarks</b> . . . . .	<b>90</b>

**Patents . . . . . 91**







## Important document information

### Symbols









#### Safety symbols

Symbol	Meaning
	<b>DANGER!</b> This symbol alerts you to a dangerous situation. Failure to avoid this situation will result in serious or fatal injury.
	<b>WARNING!</b> This symbol alerts you to a dangerous situation. Failure to avoid this situation can result in serious or fatal injury.
	<b>CAUTION!</b> This symbol alerts you to a dangerous situation. Failure to avoid this situation can result in minor or medium injury.
	<b>NOTE!</b> This symbol contains information on procedures and other facts which do not result in personal injury.



#### Electrical symbols

Symbol	Meaning	Symbol	Meaning
	Direct current		Alternating current
	Direct current and alternating current		<b>Ground connection</b> A grounded terminal which, as far as the operator is concerned, is grounded via a grounding system.
	<b>Protective ground connection</b> A terminal which must be connected to ground prior to establishing any other connections.		<b>Equipotential connection</b> A connection that has to be connected to the plant grounding system: This may be a potential equalization line or a star grounding system depending on national or company codes of practice.

#### Symbols for certain types of information

Symbol	Meaning
	<b>Permitted</b> Procedures, processes or actions that are permitted.
	<b>Preferred</b> Procedures, processes or actions that are preferred.
	<b>Forbidden</b> Procedures, processes or actions that are forbidden.
	<b>Tip</b> Indicates additional information.
	Reference to documentation
	Reference to page
	Reference to graphic
	Visual inspection

## Symbols in graphics


Symbol	Meaning
1, 2, 3 ...	Item numbers
1. 2. 3. ...	Series of steps
A, B, C, ...	Views
A-A, B-B, C-C, ...	Sections
	<b>Hazardous area</b> Indicates a hazardous area.
	<b>Safe area (non-hazardous area)</b> Indicates the non-hazardous area.

## Function and system design

### Measuring principle

#### Basic principles

The Levelflex is a "downward-looking" measuring system that functions according to the ToF method (ToF = Time of Flight). The distance from the reference point to the product surface is measured. High-frequency pulses are injected to a probe and led along the probe. The pulses are reflected by the product surface, received by the electronic evaluation unit and converted into level information. This method is also known as TDR (Time Domain Reflectometry).

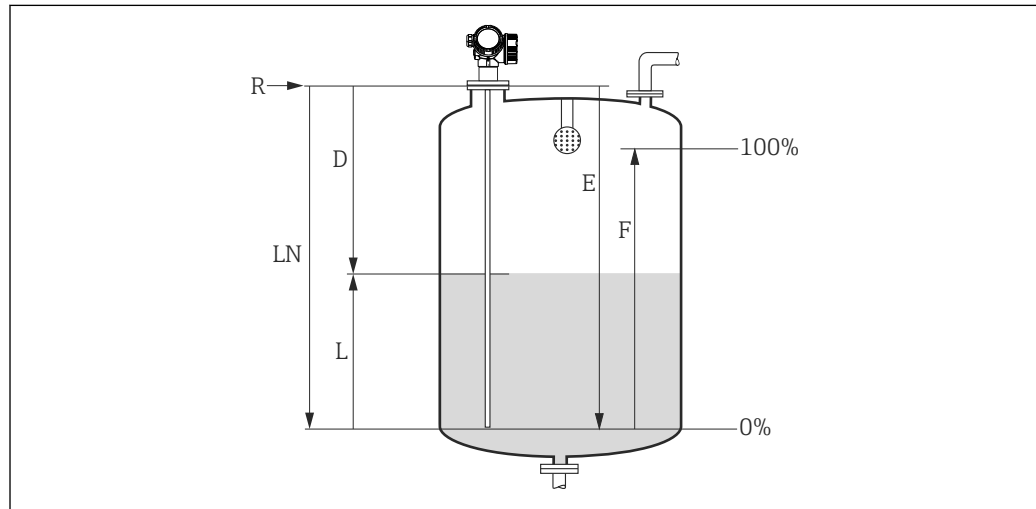

A0014124

1 Parameters for level measurement with the guided radar

- LN Probe length
- D Distace
- L Level
- R Reference point of measurement
- E Empty calibration (= zero)
- F Full calibration (= span)

**Dielectric constant**

The dielectric constant (DC) of the medium has a direct impact on the degree of reflection of the high-frequency pulses. In the case of large DC values, such as for water or ammonia, there is strong pulse reflection while, with low DC values, such as for hydrocarbons, weak pulse reflection is experienced.

**Input**

The reflected pulses are transmitted from the probe to the electronics. There, a microprocessor analyzes the signals and identifies the level echo which was generated by the reflection of the high-frequency pulses at the product surface. This clear signal detection system benefits from over 30 years' experience with pulse time-of-flight procedures that have been integrated into the development of the PulseMaster® software.

The distance  $D$  to the product surface is proportional to the time of flight  $t$  of the impulse:


$$D = c \cdot t/2,$$

where  $c$  is the speed of light.

Based on the known empty distance  $E$ , the level  $L$  is calculated:

$$L = E - D$$

The reference point  $R$  of the measurement is located at the process connection. For details see the dimensional drawing:

FMP53: →  53

The Levelflex possesses functions for interference echo suppression that can be activated by the user. They guarantee that interference echoes from e.g. internals and struts are not interpreted as level echoes.

**Output**

The Levelflex is preset at the factory to the probe length ordered so that in most cases only the application parameters that automatically adapt the device to the measuring conditions need to be entered. For models with a current output, the factory adjustment for zero point  $E$  and span  $F$  is 4 mA and 20 mA, for digital outputs and the display module 0 % and 100 %. A linearization function with max. 32 points, which is based on a table entered manually or semi-automatically, can be activated on site or via remote operation. This function allows the level to be converted into units of volume or mass, for example.

**Life cycle of the product****Engineering**

- Universal measuring principle
- Measurement unaffected by medium properties
- Hardware and software developed according to SIL IEC 61508
- Genuine, direct interface measurement

**Procurement**

- Endress+Hauser being the world market leader in level measurement guarantees asset protection
- Worldwide support and service

**Installation**

- Special tools are not required
- Reverse polarity protection
- Modern, detachable terminals
- Main electronics protected by a separate connection compartment

**Commissioning**

- Fast, menu-guided commissioning in only 6 steps
- Plain text display in national languages reduces the risk of error or confusion
- Direct local access of all parameters
- Short instruction manual at the device

**Operation**

- Multi-echo tracking: Reliable measurement through self-learning echo-search algorithms taking into account the short-term and long-term history in order to check the found echoes for plausibility and to suppress interference echoes.
- Diagnostics in accordance with NAMUR NE107

**Maintenance**

- HistoROM: Data backup for instrument settings and measured values
- Exact instrument and process diagnosis to assist fast decisions with clear details concerning remedies
- Intuitive, menu-guided operating concept in national languages saves costs for training, maintenance and operation
- Cover of the electronics compartment can be opened in hazardous areas

**Retirement**


- Order code translation for subsequent models
- RoHS-conforming (Restriction of certain Hazardous Substances), unleaded soldering of electronic components
- Environmentally sound recycling concept



**Measuring system**

**Probe selection**

The various types of probe in combination with the process connections are suitable for the following applications <sup>1)</sup>:

Levelflex FMP53	
Type of probe	Rod probe
	
<b>Feature 060 - Probe:</b>	<b>Option:</b>
	DA 8 mm (316L), Ra<0.76µm/30µm
	DB 0.31 in (316L), Ra<0.76µm/30µm
	EA 8 mm (316L), ep=electro-polished, Ra<0.38µm/15µm
	EB 0.31 in (316L), ep=electro-polished, Ra<0.38µm/15µm
	FA 8 mm (316L), 500 mm divisible, Ra<0.76µm/30µm
	FB 0.31 in (316L), 20 in divisible, Ra<0.76µm/30µm
	GA 8 mm (316L), 500 mm divisible, ep=electro-polished, Ra<0.38µm/15µm
	GB 0.31 in (316L), 20 in divisible, ep=electro-polished, Ra<0.38µm/15µm
	HA 8 mm (316L), 1000 mm divisible, Ra<0.76µm/30µm
	HB 0.31 in (316L), 40 in divisible, Ra<0.76µm/30µm
	IA 8 mm (316L), 1000 mm divisible, ep=electro-polished, Ra<0.76µm/30µm
IB 0.31 in (316L), 40 in divisible, ep=electro-polished, Ra<0.76µm/30µm	
Max. probe length	6 m (20 ft) <sup>1)</sup>
For application	level measurement in liquids
Option	<ul style="list-style-type: none"> <li>▪ Reference probe can be connected Calibration kit FMP53 - order number: 71041382 → 81</li> <li>▪ Autoclavable Protective cover FMP43/FMP53 - order no. 71041379</li> </ul>

1) Maximum probe length for indivisible rod probes: 4 m (13 ft)

1) If required, rod and rope probes can be replaced. They are secured with Nord-Lock washers or a thread coating. For further information on service and spare parts please contact the Endress+Hauser service.

## Input

### Measured variable

The measured variable is the distance between the reference point and the product surface.  
Subject to the empty distance entered "E" the level is calculated.  
Alternatively, the level can be converted into other variables (volume, mass) by means of linearization (32 points).

### Measuring range

The following table describes the media groups and the possible measuring range as a function of the media group.


Levelflex FMP53			
Media group	DC ( $\epsilon_r$ )	Typical liquids	Measuring range
			rod probes
1	1.4...1.6	condensed gases, e.g. N <sub>2</sub> , CO <sub>2</sub>	on request
2	1.6...1.9	<ul style="list-style-type: none"> <li>▪ liquefied gas, e.g. propane</li> <li>▪ solvent</li> <li>▪ Freon</li> <li>▪ palm oil</li> </ul>	<ul style="list-style-type: none"> <li>▪ one-piece: 4 m (13 ft)</li> <li>▪ divisible: 6 m (20 ft)</li> </ul>
3	1.9...2.5	mineral oils, fuels	<ul style="list-style-type: none"> <li>▪ one-piece: 4 m (13 ft)</li> <li>▪ divisible: 6 m (20 ft)</li> </ul>
4	2.5...4	<ul style="list-style-type: none"> <li>▪ benzene, styrene, toluene</li> <li>▪ furan</li> <li>▪ naphthalene</li> </ul>	<ul style="list-style-type: none"> <li>▪ one-piece: 4 m (13 ft)</li> <li>▪ divisible: 6 m (20 ft)</li> </ul>
5	4...7	<ul style="list-style-type: none"> <li>▪ chlorobenzene, chloroform</li> <li>▪ cellulose spray</li> <li>▪ isocyanate, aniline</li> </ul>	<ul style="list-style-type: none"> <li>▪ one-piece: 4 m (13 ft)</li> <li>▪ divisible: 6 m (20 ft)</li> </ul>
6	> 7	<ul style="list-style-type: none"> <li>▪ aqueous solutions</li> <li>▪ alcohols</li> <li>▪ acids, alkalis</li> </ul>	<ul style="list-style-type: none"> <li>▪ one-piece: 4 m (13 ft)</li> <li>▪ divisible: 6 m (20 ft)</li> </ul>



Reduction of the max. possible measuring range through buildup, above all of moist products.

**Blocking distance**

The upper blocking distance (= UB) is the minimum distance from the reference point of the measurement (mounting flange) to the maximum level.

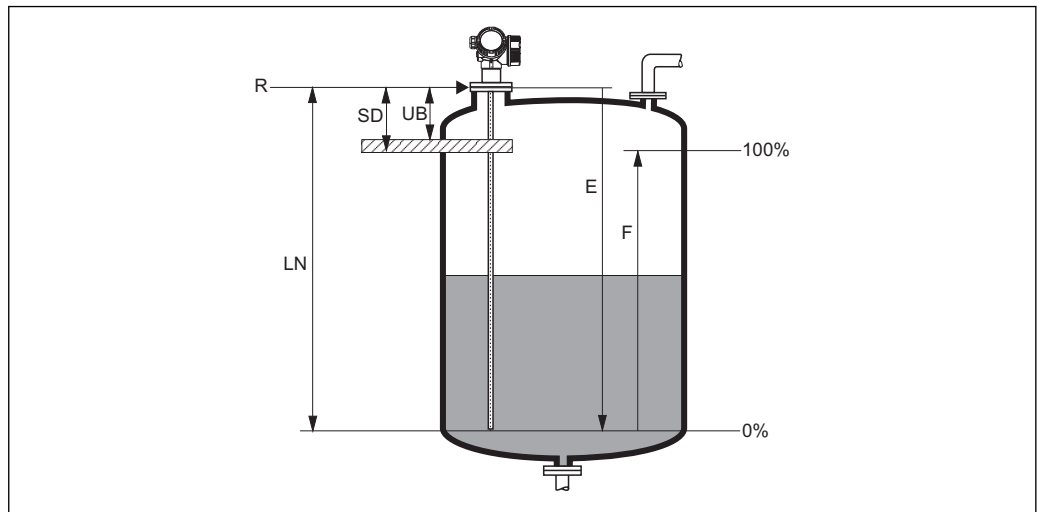

A0011279

2 Definition of blocking distance and safety distance

- R Reference point of measurement
- LN Probe length
- UB Upper blocking distance
- E Empty calibration (= zero)
- F Full calibration (= span)
- SD Safety distance

Blocking distance (factory setting):  
with rod probes up to 6 m (20 ft): 200 mm (8 in)

**i** The specified blocking distances are preset on delivery. Depending on the application these settings can be changed.

When using a spray ball, the blocking distance must be at least 50 mm (2").

For rod probes and for media with DC > 7 (or generally for stilling well/bypass applications) the blocking distance may be reduced to 100 mm (4").

Within the blocking distance, a reliable measurement can not be guaranteed.

**i** A safety distance SD can be defined in addition to the blocking distance. A warning is generated if the level rises into this safety distance.

**Measuring frequency spectrum**

100 MHz to 1.5 GHz

## Output

### Output signal

#### HART

Signal coding	FSK $\pm 0.5$ mA over currency signal
Data transmission rate	1200 Baud
Galvanic isolation	Yes


#### PROFIBUS PA

Signal coding	Manchester Bus Powered (MBP)
Data transmission rate	31,25 KBit/s, voltage mode
Galvanic isolation	Yes

#### FOUNDATION Fieldbus

Signal coding	Manchester Bus Powered (MBP)
Data transmission rate	31,25 KBit/s, voltage mode
Galvanic isolation	Yes

### Switch output

 For HART devices, the switch output is available as an option. See product structure, feature 20: "Power Supply, Output", option B: "2-wire; 4-20mA HART, switch output"

Devices with PROFIBUS PA and FOUNDATION Fieldbus always have a switch output.

Switch output	
Function	Open collector switching output
Switching behavior	Binary (conductive or non-conductive), switches when the programmable switch point is reached
Failure mode	non-conductive
Electrical connection values	$U = 10.4$ to $35 V_{DC}$ , $I = 0$ to $40$ mA
Internal resistance	$R_i < 880 \Omega$ The voltage drop at this internal resistance has to be taken into account on planning the configuration. For example, the resulting voltage at a connected relay must be sufficient to switch the relay.
Insulation voltage	floating, Insulation voltage $1350 V_{DC}$ to power supply and $500 V_{AC}$ to ground
Switch point	freely programmable, separately for switch-on and switch-off point
Switching delay	freely programmable from 0 to 100 sec. , separately for switch-on and switch-off point
Number of switching cycles	corresponds to the measuring cycle
Signal source device variables	<ul style="list-style-type: none"> <li>▪ Level linearized</li> <li>▪ Distance</li> <li>▪ Terminal voltage</li> <li>▪ Electronic temperature</li> <li>▪ Relative echo amplitude</li> <li>▪ Diagnostic values, Advanced diagnostics</li> </ul>
Number of switching cycles	unlimited

**Signal on alarm**

Depending on the interface, failure information is displayed as follows:

- Current output (for HART devices)
  - Failsafe mode selectable (in accordance with NAMUR Recommendation NE 43):  
Minimum alarm: 3.6 mA  
Maximum alarm (= factory setting): 22 mA
  - Failsafe mode with user-selectable value: 3.59 to 22.5 mA
- Local display
  - Status signal (in accordance with NAMUR Recommendation NE 107)
  - Plain text display
- Operating tool via digital communication (HART, PROFIBUS PA, FOUNDATION Fieldbus) or service interface (CDI)
  - Status signal (in accordance with NAMUR Recommendation NE 107)
  - Plain text display

---

**Linearization**

The linearization function of the device allows the conversion of the measured value into any unit of length or volume. Linearization tables for calculating the volume in cylindrical tanks are pre-programmed. Other tables of up to 32 value pairs can be entered manually or semi-automatically.

---

**Galvanic isolation**

All circuits for the outputs are galvanically isolated from each other.

## Protocol-specific data

## HART

Manufacturer ID	17 (0x11)
Device type ID	0x34
HART specification	6.0
Device description files (DTM, DD)	Information and files at: <ul style="list-style-type: none"> <li>▪ <a href="http://www.endress.com">www.endress.com</a></li> <li>▪ <a href="http://www.hartcomm.org">www.hartcomm.org</a></li> </ul>
HART load	Min. 250 $\Omega$
HART device variables	The measured values can be freely assigned to the device variables. <p><b>Measured values for PV (primary variable)</b></p> <ul style="list-style-type: none"> <li>▪ Level linearized</li> <li>▪ Distance</li> <li>▪ Electronic temperature</li> <li>▪ Relative echo amplitude</li> </ul> <p><b>Measured values for SV, TV, FV (second, third and fourth variable)</b></p> <ul style="list-style-type: none"> <li>▪ Level linearized</li> <li>▪ Distance</li> <li>▪ Terminal voltage</li> <li>▪ Electronic temperature</li> <li>▪ Absolute echo amplitude</li> <li>▪ Relative echo amplitude</li> <li>▪ Calculated DC</li> </ul>
Supported functions	<ul style="list-style-type: none"> <li>▪ Burst mode</li> <li>▪ Additional transmitter status</li> </ul>

## Wireless HART data

<b>Minimum start-up voltage</b>	11.4 V
<b>Start-up current</b>	3.6 mA
<b>Start-up time</b>	15 s
<b>Minimum operating voltage</b>	11.4 V
<b>Multidrop current</b>	3.6 mA
<b>Set-up time</b>	1 s

**PROFIBUS PA**

Manufacturer ID	17 (0x11)
Ident number	0x1558
Profile version	3.02
GSD file	Information and files at:
GSD file version	<ul style="list-style-type: none"> <li>▪ <a href="http://www.endress.com">www.endress.com</a></li> <li>▪ <a href="http://www.profibus.org">www.profibus.org</a></li> </ul>
Output values	<p><b>Analog Input:</b></p> <ul style="list-style-type: none"> <li>▪ Level linearized</li> <li>▪ Distance</li> <li>▪ Terminal voltage</li> <li>▪ Electronic temperature</li> <li>▪ Absolute echo amplitude</li> <li>▪ Relative echo amplitude</li> <li>▪ Calculated DC</li> </ul> <p><b>Digital Input:</b></p> <ul style="list-style-type: none"> <li>▪ Extended diagnostic blocks</li> <li>▪ Status output PFS Block</li> </ul>
Input values	<p><b>Analog Output:</b></p> <ul style="list-style-type: none"> <li>▪ Analog value from PLC (for sensor block external pressure and temperature)</li> <li>▪ Analog value from PLC to be indicated on the display</li> </ul> <p><b>Digital Output:</b></p> <ul style="list-style-type: none"> <li>▪ Extended diagnostic block</li> <li>▪ Level limiter</li> <li>▪ Sensor block measurement on</li> <li>▪ Sensor block save history on</li> <li>▪ Status output</li> </ul>
Supported functions	<ul style="list-style-type: none"> <li>▪ Identification &amp; Maintenance <ul style="list-style-type: none"> <li>Simple device identification via control system and nameplate</li> </ul> </li> <li>▪ Automatic Ident Number Adoption <ul style="list-style-type: none"> <li>GSD compatibility mode with respect to the previous device Levelflex M FMP4x</li> </ul> </li> <li>▪ Physical Layer Diagnostics <ul style="list-style-type: none"> <li>Installation check of the PROFIBUS segment and the Levelflex FMP4x via terminal voltage and telegram monitoring</li> </ul> </li> <li>▪ PROFIBUS Up-/Download <ul style="list-style-type: none"> <li>Up to 10 times faster reading and writing of parameters via PROFIBUS Up-/Download</li> </ul> </li> <li>▪ Condensed Status <ul style="list-style-type: none"> <li>Simple and self-explanatory diagnostic information due to categorization of diagnostic messages</li> </ul> </li> </ul>

**FOUNDATION Fieldbus**

Manufacturer ID	0x452B48
Device type	0x1022
Device Revision	0x01
DD Revision	Information and files at:
CFF Revision	<ul style="list-style-type: none"> <li>▪ <a href="http://www.endress.com">www.endress.com</a></li> <li>▪ <a href="http://www.fieldbus.org">www.fieldbus.org</a></li> </ul>
Device Tester Version (ITK Version)	6.01
ITK Test Campaign Number	IT080500
Link Master (LAS) capable	yes
Link Master / Basic Device selectable	yes; default: Basic Device
Node address	Default: 247 (0xF7)
Features supported	<p>Following methods are supported:</p> <ul style="list-style-type: none"> <li>▪ Restart</li> <li>▪ ENP Restart</li> <li>▪ Setup</li> <li>▪ Linearization</li> <li>▪ Self Check</li> </ul>
<b>Virtual Communication Relationships (VCRs)</b>	
Number of VCRs	44
Number of Link Objects in VFD	50
Permanent entries	1
Client VCRs	0
Server VCRs	10
Source VCRs	43
Sink VCRs	0
Subscriber VCRs	43
Publisher VCRs	43
<b>Device Link Capabilities</b>	
Slot time	4
Min. inter PDU delay	8
Max. response delay	5



*Transducer Blocks*

<b>Block</b>	<b>Content</b>	<b>Output values</b>
Setup Transducer Block	Contains all parameters for a standard commissioning procedure	<ul style="list-style-type: none"> <li>▪ Level or volume <sup>1)</sup> (Channel 1)</li> <li>▪ Distance (Channel 2)</li> </ul>
Advanced Setup Transducer Block	Contains all parameters for a more detailed configuration of the device	no output values
Display Transducer Block	Contains all parameters for the configuration of the display module	no output values
Diagnostic Transducer Block	Contains diagnostic information	no output values
Expert Configuration Transducer Block	Contains parameters which require detailed knowledge of the functionalities of the device	no output values
Expert Information Transducer Block	Contains information about the state of the device	no output values
Service Sensor Transducer Block	Contains parameters which can only be operated by Endress+Hauser service personnel	no output values
Service Information Transducer Block	Contains information on the state of device which is relevant for service operations	no output values
Data Transfer Transducer Block	Contains parameters which allow to backup the device configuration in the display module and to restore it into the device.	no output values

1) depending on the configuration of the block

## Function Blocks

Block	Content	Number of permanent blocks	Number of instantiable blocks	Execution time	Functionality
Resource Block	The Resource Block contains all the data that uniquely identify the field device. It is an electronic version of a nameplate of the device.	1	0	-	enhanced
Analog Input Block	The AI block takes the manufacturer's input data, selected by channel number, and makes it available to other function blocks at its output.	2	3	25 ms	enhanced
Discrete Input Block	The DI block takes a discrete input value (e.g. indication of an level limit), and makes it available to other function blocks at its output.	1	2	20 ms	standard
PID Block	The PID block serves as proportional-integral-derivative controller and is used almost universally to do closed-loop-control in the field including cascade and feedforward.	1	1	25 ms	standard
Arithmetic Block	This block is designed to permit simple use of popular measurement math functions. The user does not have to know how to write equations. The math algorithm is selected by name, chosen by the user for the function to be done.	1	1	25 ms	standard
Signal Characterizer Block	The signal characterizer block has two sections, each with an output that is a non-linear function of the respective input. The non-linear function is determined by a single look-up table with 21 arbitrary x-y pairs.	1	1	25 ms	standard
Input Selector Block	The input selector block provides selection of up to four inputs and generates an output based on the configured action. This block normally receives its inputs from AI blocks. The block performs maximum, minimum, middle, average and 'first good' signal selection.	1	1	25 ms	standard
Integrator Block	The Integrator Function Block integrates a variable as a function of the time or accumulates the counts from a Pulse Input block. The block may be used as a totalizer that counts up until reset or as a batch totalizer that has a setpoint, where the integrated or accumulated value is compared to pre-trip and trip settings, generating discrete signals when these settings are reached.	1	1	25 ms	standard
Analog Alarm Block		1	1	25 ms	standard




Up to 20 blocks can be instantiated in the device altogether, including the blocks already instantiated on delivery.

# Energieversorgung

Terminal assignment

2-wire: 4-20mA HART

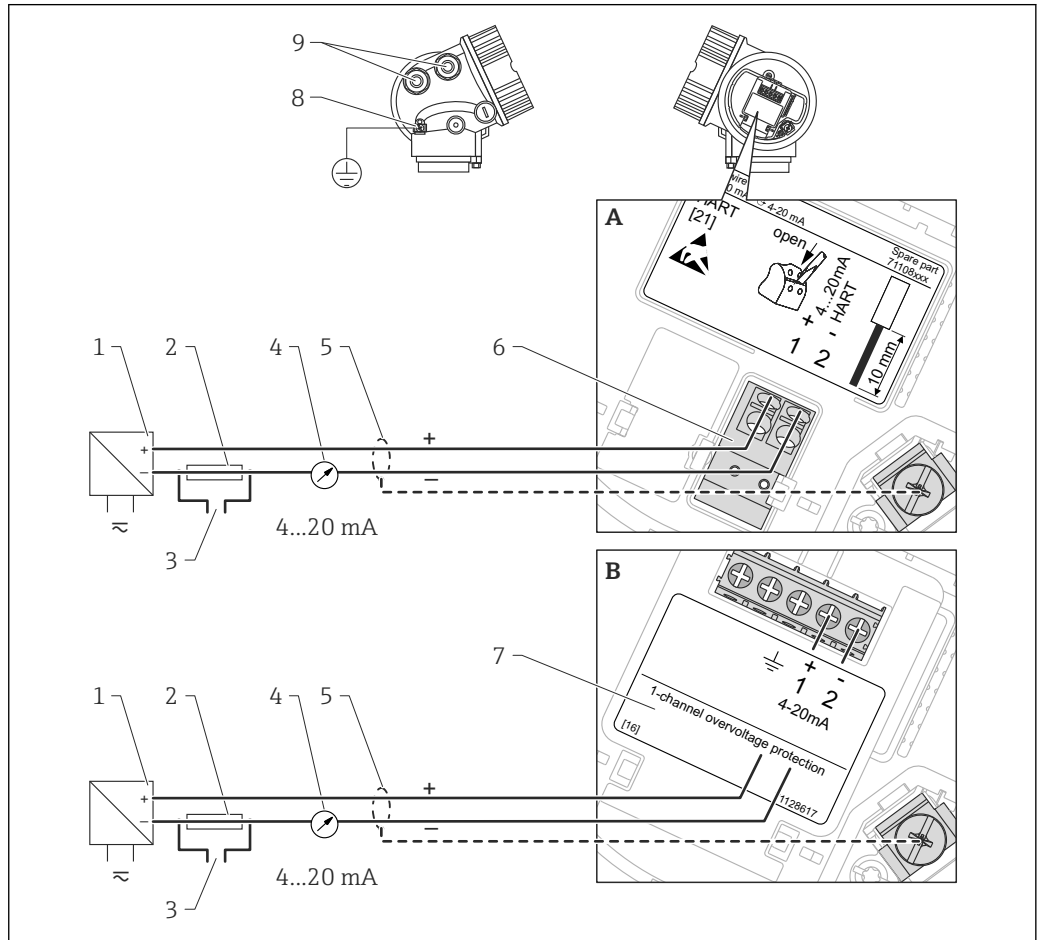


A0011294

**3** Terminal assignment 2-wire; 4-20mA HART

- A Without integrated overvoltage protection
- B With integrated overvoltage protection
- 1 Active barrier with power supply (e.g. RN221N): Observe terminal voltage
- 2 HART communication resistor ( $\geq 250 \Omega$ ): Observe maximum load
- 3 Connection for Commubox FXA195 or FieldXpert SFX350/SFX370 (via VIATOR Bluetooth modem)
- 4 Analog display device: Observe maximum load
- 5 Cable screen; observe cable specification
- 6 4-20mA HART (passive): Terminals 1 and 2
- 7 Overvoltage protection module
- 8 Terminal for potential equalization line
- 9 Cable entry

2-wire: 4-20mA HART, switch output

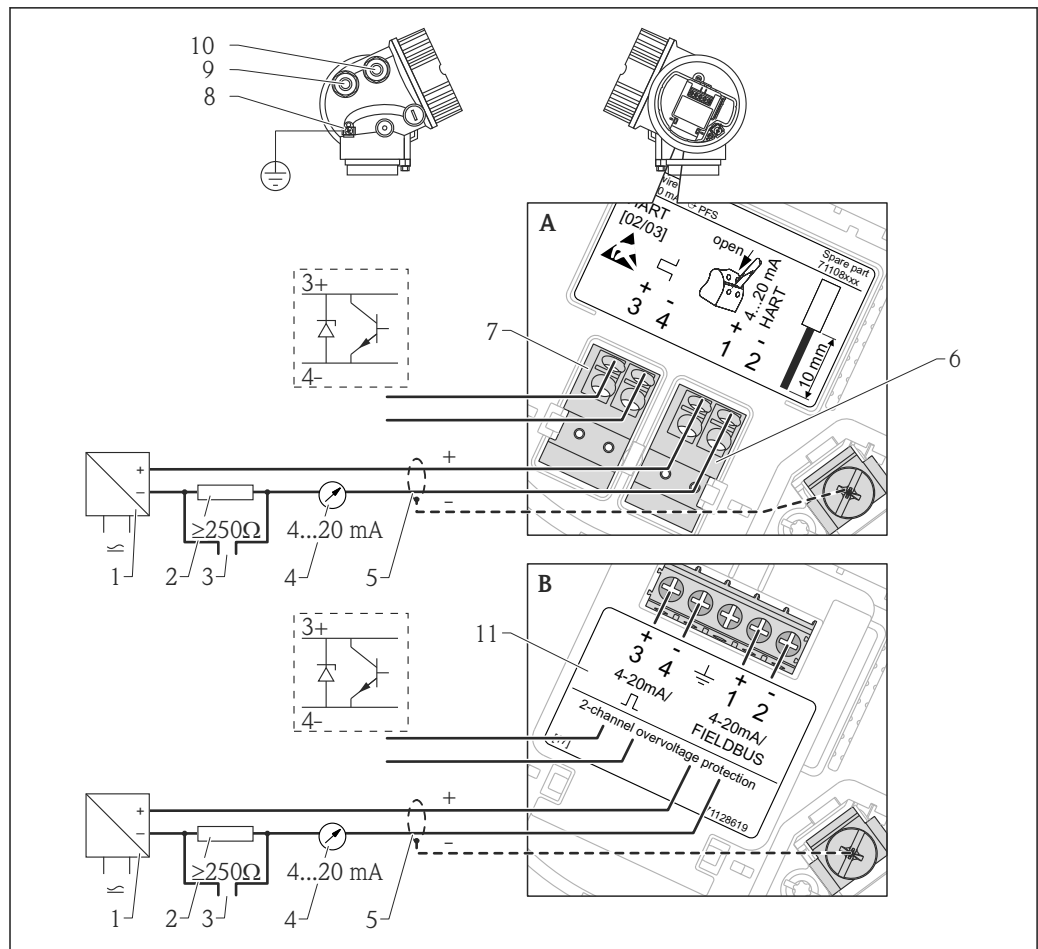


A0013759

4 Terminal assignment 2-wire; 4-20mA HART, switch output

- A Without integrated overvoltage protection
- B With integrated overvoltage protection
- 1 Active barrier with power supply (e.g. RN221N): Observe terminal voltage
- 2 HART communication resistor ( $\geq 250 \Omega$ ): Observe maximum load
- 3 Connection for Commubox FXA195 or FieldXpert SFX350/SFX370 (via VIATOR Bluetooth modem)
- 4 Analog display device: Observe maximum load
- 5 Cable screen; observe cable specification
- 6 4-20mA HART (passive): Terminals 1 and 2
- 7 Switch output (open collector): Terminals 3 and 4
- 8 Terminal for potential equalization line
- 9 Cable entry for 4-20mA HART line
- 10 Cable entry for switch output line
- 11 Overvoltage protection module

2-wire: 4-20mA HART, 4-20mA

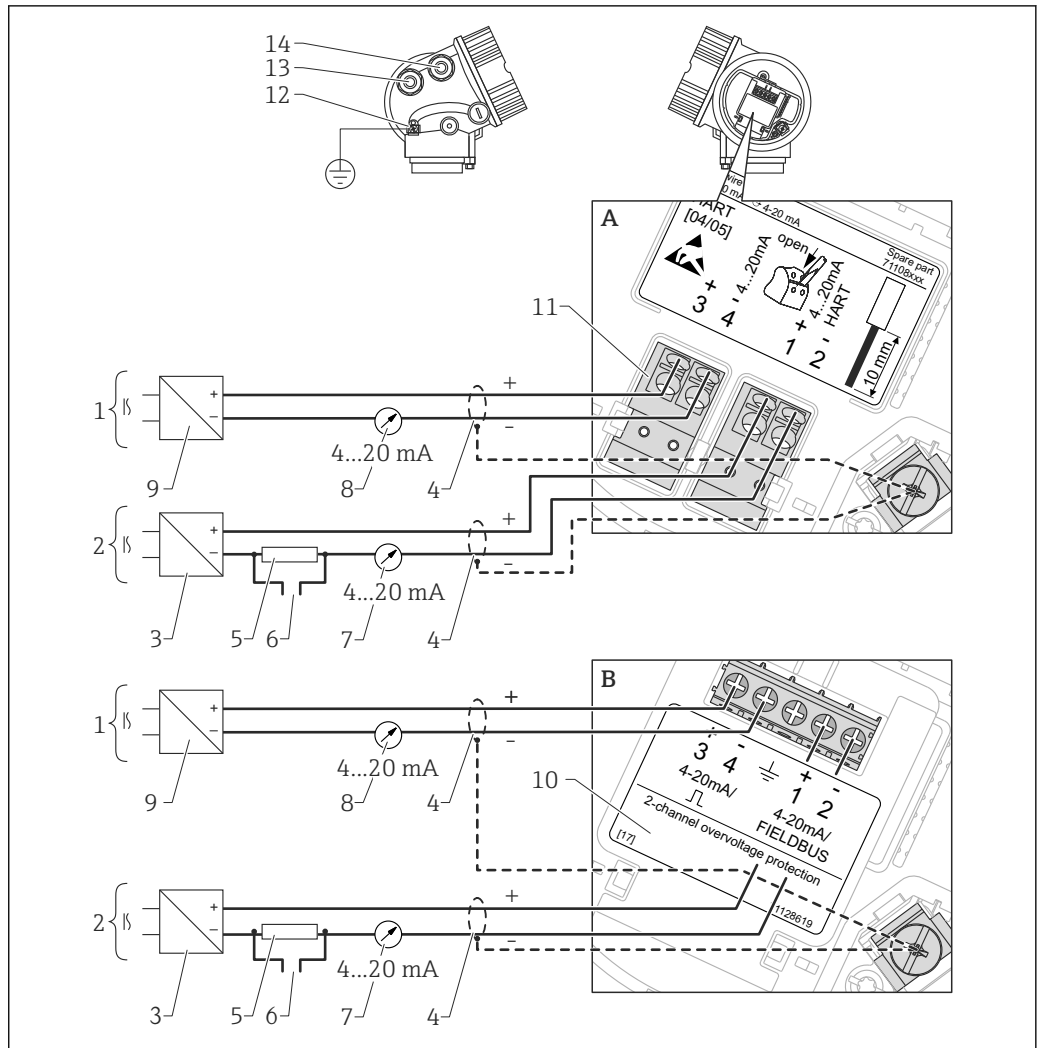


A0013923

5 Terminal assignment 2-wire, 4-20 mA HART, 4...20mA

- A Without integrated overvoltage protection
- B With integrated overvoltage protection
- 1 Connection current output 2
- 2 Connection current output 1
- 3 Supply voltage for current output 1 (e.g. RN22 1N); Observe terminal voltage
- 4 Cable screen; observe cable specification
- 5 HART communication resistor ( $\geq 250 \Omega$ ); Observe maximum load
- 6 Connection for Commubox FXA195 or FieldXpert SFX350/SFX370 (via VIATOR Bluetooth modem)
- 7 Analog display device ; observe maximum load
- 8 Analog display device ; observe maximum load
- 9 Supply voltage for current output 2 (e.g. RN22 1N); Observe terminal voltage
- 10 Overvoltage protection module
- 11 Current output 2: Terminals 3 and 4
- 12 Terminal for the potential equalization line
- 13 Cable entry for current output 1
- 14 Cable entry for current output 2

**i** This version is also suited for single-channel operation. In this case, current output 1 (terminals 1 and 2) must be used.

4-wire: 4-20mA HART (10.4 to 48 V<sub>DC</sub>)

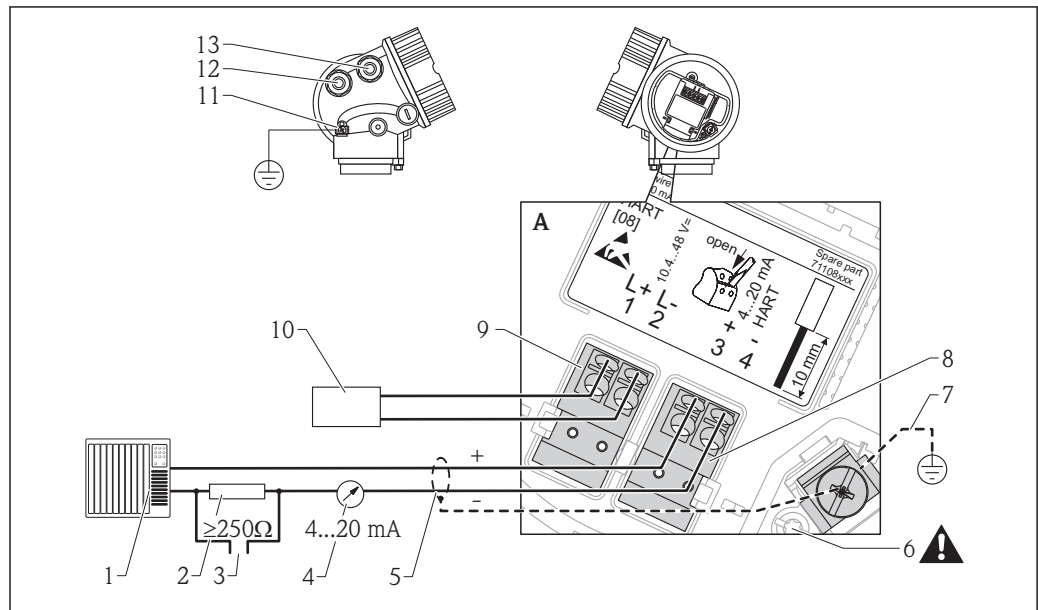


A0011340

6 Terminal assignment 4-wire; 4-20mA HART (10.4 to 48 VDC)

- 1 Evaluation unit, e.g. PLC
- 2 HART communication resistor ( $\geq 250 \Omega$ ): Observe maximum load
- 3 Connection for Commubox FXA195 or FieldXpert SFX350/SFX370 (via VIATOR Bluetooth modem)
- 4 Analog display device: Observe maximum load
- 5 Signal cable including screening (if required), observe cable specification
- 6 Protective connection; do not disconnect!
- 7 Protective earth, observe cable specification
- 8 4...20mA HART (active): Terminals 3 and 4
- 9 Supply voltage: Terminals 1 and 2
- 10 Supply voltage: Observe terminal voltage, observe cable specification
- 11 Terminal for potential equalization
- 12 Cable entry for signal line
- 13 Cable entry for power supply

4-wire: 4-20mA HART (90 to 253 V<sub>AC</sub>)

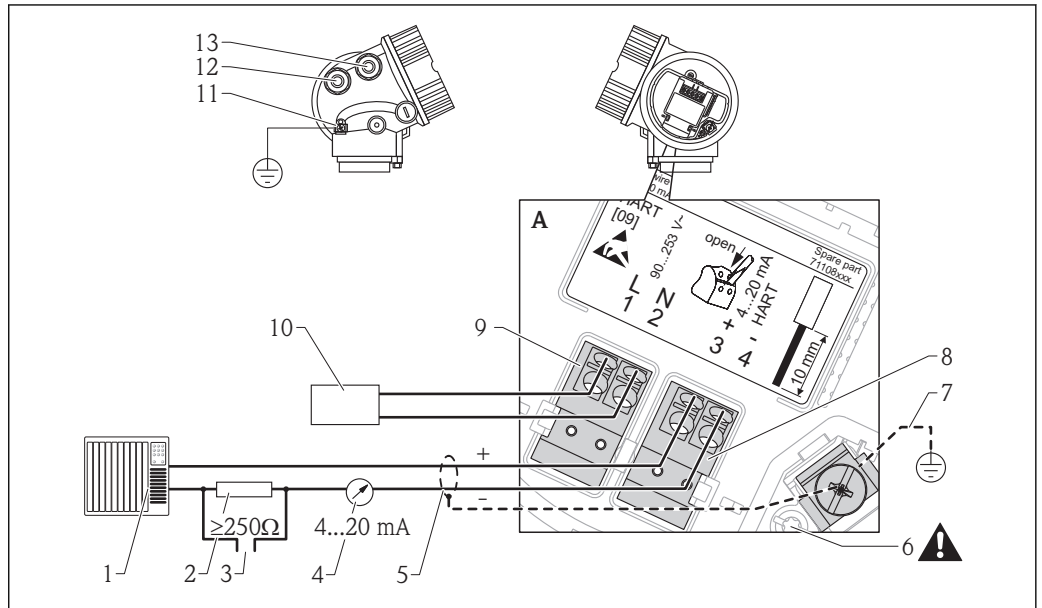

A0018965

7 Terminal assignment 4-wire; 4-20mA HART (90 to 253 VAC)


- 1 Evaluation unit, e.g. PLC
- 2 HART communication resistor ( $\geq 250 \Omega$ ): Observe maximum load
- 3 Connection for Commubox FXA195 or FieldXpert SFX350/SFX370 (via VIATOR Bluetooth modem)
- 4 Analog display device: Observe maximum load
- 5 Signal cable including screening (if required), observe cable specification
- 6 Protective connection; do not disconnect!
- 7 Protective earth, observe cable specification
- 8 4...20mA HART (active): Terminals 3 and 4
- 9 Supply voltage: Terminals 1 and 2
- 10 Supply voltage: Observe terminal voltage, observe cable specification
- 11 Terminal for potential equalization
- 12 Cable entry for signal line
- 13 Cable entry for power supply

**CAUTION**

To ensure electrical safety:

- ▶ Do not disconnect the protective connection (6).
  - ▶ Disconnect the supply voltage before disconnecting the protective earth (7).
- i** Connect protective earth to the internal ground terminal (7) before connecting the supply voltage. If necessary, connect the potential matching line to the external ground terminal (11).
  - i** In order to ensure electromagnetic compatibility (EMC): Do not only ground the device via the protective earth conductor of the supply cable. Instead, the functional grounding must also be connected to the process connection (flange or threaded connection) or to the external ground terminal.
  - i** An easily accessible power switch must be installed in the proximity of the device. The power switch must be marked as a disconnecter for the device (IEC/EN61010).

PROFIBUS PA / FOUNDATION Fieldbus

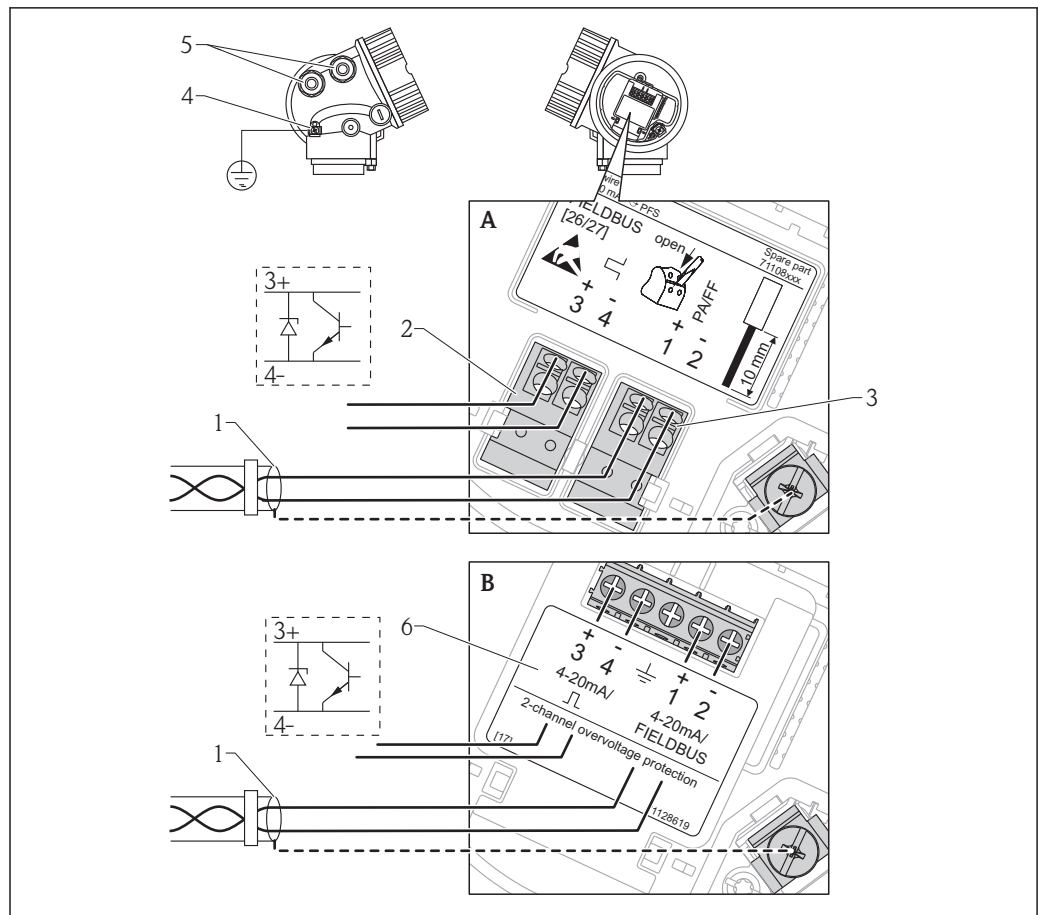

A0011341

8 Terminal assignment PROFIBUS PA / FOUNDATION Fieldbus



- A Without integrated overvoltage protection
- B With integrated overvoltage protection
- 1 Cable screen: Observe cable specifications
- 2 Switch output (open collector): Terminals 3 and 4
- 3 PROFIBUS PA / FOUNDATION Fieldbus: Terminals 1 and 2
- 4 Terminal for potential equalization line
- 5 Cable entries
- 6 Overvoltage protection module



**Connection examples for the switch output**

**i** For HART devices, the switch output is available as an option. See product structure, feature 20: "Power Supply, Output", option B: "2-wire; 4-20mA HART, switch output"

Devices with PROFIBUS PA and FOUNDATION Fieldbus always have a switch output.

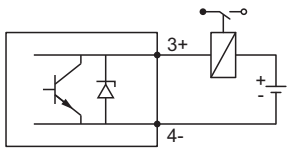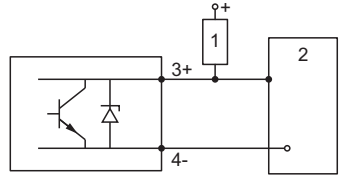 <p style="text-align: right; font-size: small;">A0015909</p> <p><b>9</b> Connection of a relay</p> <p>Suitable relays (examples):</p> <ul style="list-style-type: none"> <li>■ Solid-state relay: Phoenix Contact OV-24DC/480AC/5 with mounting rail connector UMK-1 OM-R/AMS</li> <li>■ Electromechanical relay: Phoenix Contact PLC-RSC-12DC/21</li> </ul>	 <p style="text-align: right; font-size: small;">A0015910</p> <p><b>10</b> Connection of a digital input</p> <ol style="list-style-type: none"> <li>1 Pull-up resistor</li> <li>2 Digital input</li> </ol>
--	---


**i** For optimum interference immunity we recommend to connect an external resistor (internal resistance of the relay or Pull-up resistor) of  $< 1\ 000\ \Omega$ .

**Device plug connectors**




For the versions with fieldbus plug connector (M12 or 7/8"), the signal line can be connected without opening the housing.

*Pin assignment of the M12 plug connector*

 <p style="text-align: right; font-size: small;">A0011175</p>	Pin	Meaning
	1	Signal +
	2	not connected
	3	Signal -
	4	Ground

*Pin assignment of the 7/8" plug connector*

 <p style="text-align: right; font-size: small;">A0011176</p>	Pin	Meaning
	1	Signal -
	2	Signal +
	3	Not connected
	4	Screen

**Power supply**

An external power supply is required.



Various supply units can be ordered from Endress+Hauser: see "Accessories" section → 85

**2-wire, 4-20mA HART, passive**

*2-wire; 4-20mA HART<sup>1)</sup>*

"Approval" <sup>2)</sup>	Terminal voltage U at the device	Maximum load R, depending on the supply voltage U <sub>0</sub> at the supply unit
<ul style="list-style-type: none"> <li>▪ Non-Ex</li> <li>▪ Ex nA</li> <li>▪ CSA GP</li> </ul>	11.5 to 35 V <sup>3)</sup>	<p style="text-align: right; font-size: small;">A0014076</p>
Ex ic	11.5 to 32 V <sup>3)</sup>	
Ex ia / IS	11.5 to 30 V <sup>3)</sup>	
<ul style="list-style-type: none"> <li>▪ Ex d / XP</li> <li>▪ Ex ic[ia]</li> <li>▪ Ex tD / DIP</li> </ul>	13.5 to 30 V <sup>4)</sup>	<p style="text-align: right; font-size: small;">A0014077</p>



- 1) Feature 020 of the product structure: option A
- 2) Feature 010 of the product structure
- 3) For ambient temperatures  $T_a \leq -30\text{ °C}$  ( $-22\text{ °F}$ ) a minimum voltage of 14 V is required for the startup of the device at the MIN error current (3,6 mA). The startup current can be parametrized. If the device is operated with a fixed current  $I \geq 4,5\text{ mA}$  (HART multidrop mode), a voltage of  $U \geq 11,5\text{ V}$  is sufficient throughout the entire range of ambient temperatures.
- 4) For ambient temperatures  $T_a \leq -20\text{ °C}$  ( $-4\text{ °F}$ ) a minimum voltage of 16 V is required for the startup of the device at the MIN error current (3.6 mA).

*2-wire; 4-20 mA HART, switch output<sup>1)</sup>*

"Approval" <sup>2)</sup>	Terminal voltage U at the device	Maximum load R, depending on the supply voltage U <sub>0</sub> at the supply unit
<ul style="list-style-type: none"> <li>▪ Non-Ex</li> <li>▪ Ex nA</li> <li>▪ Ex nA[ia]</li> <li>▪ Ex ic</li> <li>▪ Ex ic[ia]</li> <li>▪ Ex d[ia] / XP</li> <li>▪ Ex ta / DIP</li> <li>▪ CSA GP</li> </ul>	12 to 35 V <sup>3)</sup>	<p style="text-align: right; font-size: small;">A0019136</p>
<ul style="list-style-type: none"> <li>▪ Ex ia / IS</li> <li>▪ Ex ia + Ex d[ia] / IS + XP</li> </ul>	12 to 30 V <sup>3)</sup>	

- 1) Feature 020 of the product structure: option B
- 2) Feature 010 of the product structure
- 3) For ambient temperatures  $T_a \leq -30\text{ °C}$  ( $-22\text{ °F}$ ) a minimum voltage of 14 V is required for the startup of the device at the MIN error current (3.6 mA).

2-wire; 4-20mA HART, 4-20mA <sup>1)</sup>

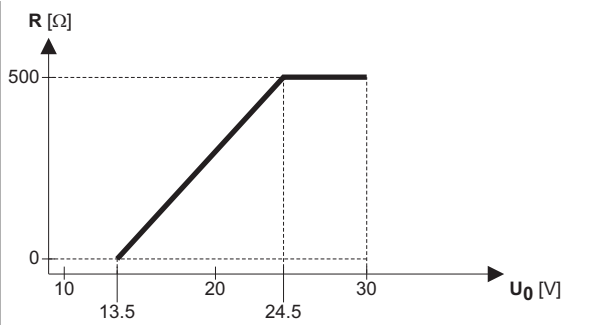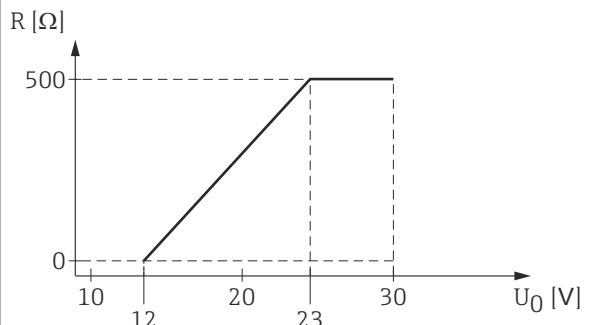"Approval" <sup>2)</sup>	Terminal voltage U at the device	Maximum load R, depending on the supply voltage U <sub>0</sub> at the supply unit
alle	<b>Channel 1:</b> 13.5 to 30 V <sup>3)</sup>	 <p style="text-align: right; font-size: small;">A0014077</p>
	<b>Channel 2:</b> 12 to 30 V	 <p style="text-align: right; font-size: small;">A0022583</p>

- 1) Feature 020 of the product structure: option C
- 2) Feature 010 of the product structure
- 3) For ambient temperatures  $T_a \leq -30\text{ °C}$  (-22 °F) a minimum voltage of 16 V is required for the startup of the device at the MIN error current (3.6 mA).

<b>Polarity reversal protection</b>	Yes
<b>Admissible residual ripple at f = 0 to 100 Hz</b>	$U_{SS} < 1\text{ V}$
<b>Admissible residual ripple at f = 100 to 10000 Hz</b>	$U_{SS} < 10\text{ mV}$

**4-wire, 4-20mA HART, active**

"Power supply; Output" <sup>1)</sup>	Terminal voltage	Maximum load R <sub>max</sub>
<b>K:</b> 4-wire 90-253VAC; 4-20mA HART	90 to 253 V <sub>AC</sub> (50 to 60 Hz), overvoltage category II	500 Ω
<b>L:</b> 4-wire 10,4-48VDC; 4-20mA HART	10.4 to 48 V <sub>DC</sub>	

1) Feature 020 of the product structure

**PROFIBUS PA, FOUNDATION Fieldbus**

"Power supply; Output" <sup>1)</sup>	"Approval" <sup>2)</sup>	Terminal voltage
<b>E:</b> 2-wire; FOUNDATION Fieldbus, switch output <b>G:</b> 2-wire; PROFIBUS PA, switch output	<ul style="list-style-type: none"> <li>▪ Non-Ex</li> <li>▪ Ex nA</li> <li>▪ Ex nA[ia]</li> <li>▪ Ex ic</li> <li>▪ Ex ic[ia]</li> <li>▪ Ex d[ia] / XP</li> <li>▪ Ex ta / DIP</li> <li>▪ CSA GP</li> </ul>	9 to 32 V <sup>3)</sup>
	<ul style="list-style-type: none"> <li>▪ Ex ia / IS</li> <li>▪ Ex ia + Ex d[ia] / IS + XP</li> </ul>	9 to 30 V

- 1) Feature 020 of the product structure
- 2) Feature 010 of the product structure
- 3) Input voltages up to 35 V will not spoil the device.

<b>Polarity sensitive</b>	No
<b>FISCO/FNICO compliant according to IEC 60079-27</b>	Yes

**Power consumption**

"Power supply; Output" <sup>1)</sup>	Power consumption
<b>A:</b> 2-wire; 4-20mA HART	< 0.9 W
<b>B:</b> 2-wire; 4-20mA HART, switch output	< 0.9 W
<b>C:</b> 2-wire; 4-20mA HART, 4-20mA	< 2 x 0.7 W
<b>K:</b> 4-wire 90-253VAC; 4-20mA HART	6 VA
<b>L:</b> 4-wire 10,4-48VDC; 4-20mA HART	1.3 W

1) Feature 020 of the product structure

**Current consumption**

**HART**

<b>Nominal current</b>	3.6 to 22 mA, the start-up current for multidrop mode can be parametrized (is set to 3.6 mA on delivery)
<b>Breakdown signal (NAMUR NE43)</b>	adjustable: 3.59 to 22.5 mA

**PROFIBUS PA**

<b>Nominal current</b>	14 mA
<b>Error current FDE (Fault Disconnection Electronic)</b>	0 mA

**FOUNDATION Fieldbus**


Device basic current	15 mA
Error current FDE (Fault Disconnection Electronic)	0 mA

**FISCO**

$U_i$	17.5 V
$I_i$	550 mA
$P_i$	5.5 W
$C_i$	5 nF
$L_i$	10 $\mu$ H

- Power supply failure**
- Configuration is retained in the HistoROM (EEPROM).
  - Error messages (incl. value of operated hours counter) are stored.

**Potential equalization** No special measures for potential equalization are required.

 If the device is designed for hazardous areas, observe the information in the documentation "Safety Instructions" (XA, ZD).

- Terminals**
- **Without integrated overvoltage protection**  
Plug-in spring terminals for wire cross-sections 0.5 to 2.5 mm<sup>2</sup> (20 to 14 AWG)
  - **With integrated overvoltage protection**  
Screw terminals for wire cross-sections 0.2 to 2.5 mm<sup>2</sup> (24 to 14 AWG)

- Cable entries**
- Connection of power supply and signal line**
- To be selected in feature 050 "Electrical connection"
- Gland M20; Material dependent on the approval:
    - For Non-Ex, ATEX, IECEx, NEPSI Ex ia/ic:  
Plastics M20x1.5 for cable  $\phi$  5 to 10 mm (0.2 to 0.39 in)
    - For Dust-Ex, FM IS, CSA IS, CSA GP, Ex nA:  
Metal M20x1.5 for cable  $\phi$  7 to 10 mm (0.28 to 0.39 in)<sup>2)</sup>
    - For Ex d:  
No gland available
  - Thread
    - 1/2" NPT
    - G 1/2"
    - M20 x 1.5
  - Plug M12 / Plug 7/8"  
Only available for Non-Ex, Ex ic, Ex ia

- Connection of remote display FHX50**
- Dependent on feature 030: "Display, Operation":
- "Prepared for display FHX50 + M12 connection":  
M12 socket
  - "Prepared for display FHX50 + custom connection":  
Thread M16

- Cable specification**
- Minimum cross-section: dependent on terminals →  30
  - For ambient temperature  $T_U \geq 60^\circ\text{C}$  (140 °F): use cable for temperature  $T_U + 20\text{ K}$ .


2) The material of the gland is dependent on the housing type; GT18 (stainless steel housing): 316L (1.4404); GT19 (plastic housing) and GT20 (aluminum housing): nickel-coated brass (CuZn).

**HART**

- A normal device cable suffices if only the analog signal is used.
- A shielded cable is recommended if using the HART protocol. Observe grounding concept of the plant.
- For 4-wire devices: Standard device cable is sufficient for the power line.

**PROFIBUS**

Use a twisted, screened two-wire cable, preferably cable type A.

 For further information on the cable specifications, see Operating Instructions BA00034S "Guidelines for planning and commissioning PROFIBUS DP/PA", PNO Guideline 2.092 "PROFIBUS PA User and Installation Guideline" and IEC61158-2 (MBP).

**FOUNDATION Fieldbus**

Endress+Hauser recommends using twisted, shielded two-wire cables.

 For further information on the cable specifications, see Operating Instructions BA00013S "FOUNDATION Fieldbus Overview", FOUNDATION Fieldbus Guideline and IEC 61158-2 (MBP).

**Overvoltage protection**

If the measuring device is used for level measurement in flammable liquids which requires the use of overvoltage protection according to DIN EN 60079-14, standard for test procedures 60060-1 (10 kA, pulse 8/20 µs), overvoltage protection has to be ensured by an integrated or external overvoltage protection module.

**Integrated overvoltage protection**


An integrated overvoltage protection module is available for 2-wire HART as well as PROFIBUS PA and FOUNDATION Fieldbus devices.

Product structure: Feature 610 "Accessory mounted", option NA "Overvoltage protection".

Technical data	
Resistance per channel	2 * 0.5 Ω max
Threshold DC voltage	400 to 700 V
Threshold impulse voltage	< 800 V
Capacitance at 1 MHz	< 1.5 pF
Nominal arrest impulse voltage (8/20 µs)	10 kA

**External overvoltage protection**

HAW562 or HAW569 from Endress+Hauser are suited as external overvoltage protection.

 For detailed information please refer to the following documents:

- HAW562: TI01012K
- HAW569: TI01013K

## Performance characteristics

### Reference operating conditions

- Temperature = +24 °C (+75 °F) ±5 °C (±9 °F)
- Pressure = 960 mbar abs. (14 psia) ±100 mbar (±1.45 psi)
- Humidity = 60 % ±15 %
- Reflection factor ≥ 0,8 (metal plate for rod probe with min. 1 m (40 in) diameter)
- Flange for rod probe ≥ 300 mm (12 in) diameter
- Distance to obstacles ≥ 1 m (40 in)

### Maximum measured error


Typical data under reference operating conditions: DIN EN 61298-2, percentage values in relation to the span.

Output:	digital	analog <sup>1)</sup>
Sum of non-linearity, nonrepeatability and hysteresis	±2 mm (0.08 in)	±0.02 %
Offset / Zero	±4 mm (0.16 in)	±0.03 %

1) Add error of the analogous value to the digital value.

If the reference conditions are not met, the offset/zero point arising from the mounting situation may be up to ±12 mm (0.47 in). This additional offset/zero point can be compensated for by entering a correction (parameter "level correction") during commissioning.

**Differing from this, the following measuring error is present in the vicinity of the lower probe end:**

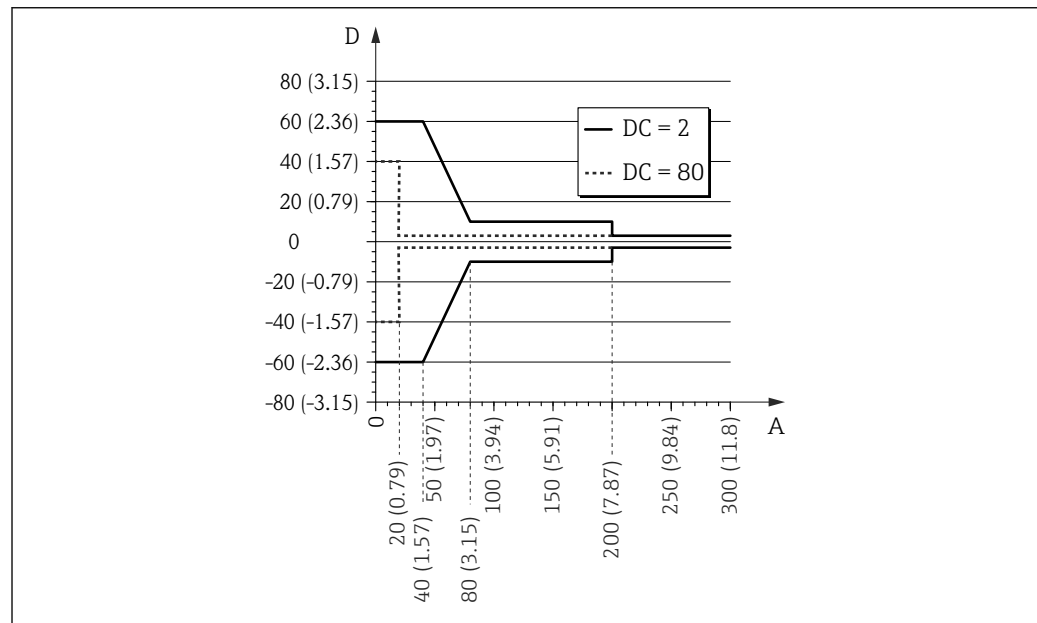

11 Measuring error at the end-of-probe for rod and coax probes


A Distance from probe end [mm(in)]

D Measuring error: Sum of non-linearity, non-repeatability and hysteresis

**i** If for rope probes the DC value is less than 7, then measurement is not possible in the area of the straining weight (0 to 250 mm from end of probe; lower blocking distance).



In the area of the upper probe end, the measuring error is as follows (rod/rope only):

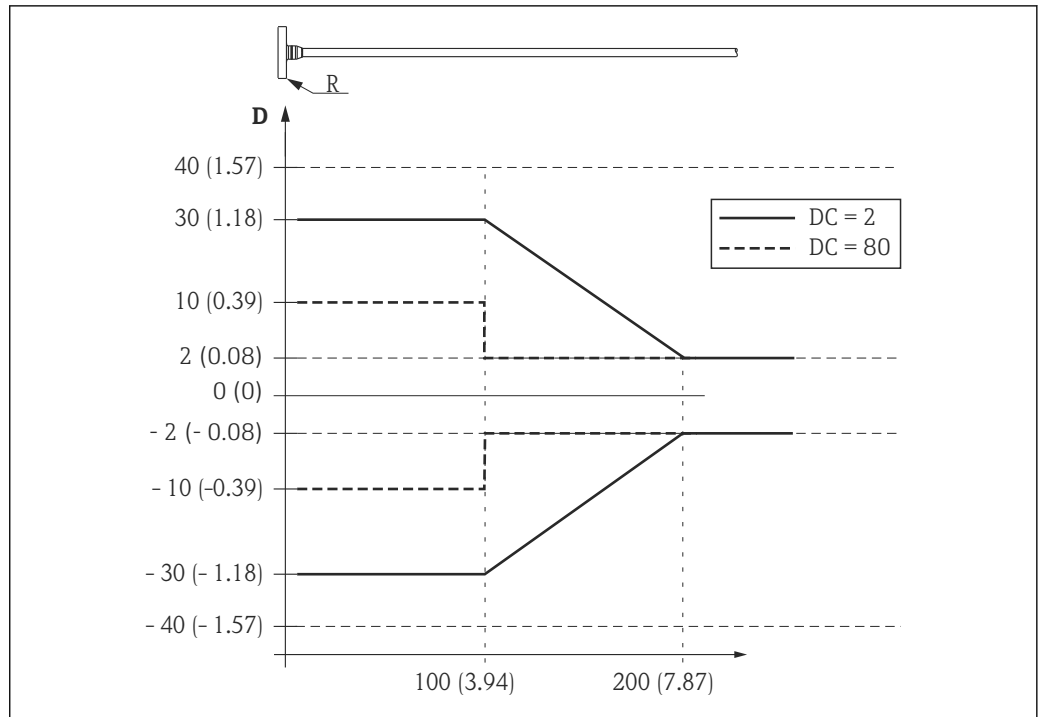

12 Measuring error at the upper end of the probe; dimensions: mm (in)

D Sum of non-linearity, non-repeatability and hysteresis

R Reference point of measurement

DC Dielectric constant

**Resolution**

- digital: 1 mm
- analog: 1  $\mu$ A

**Reaction time** The reaction time can be parametrized. The following step response times (as per DIN EN 61298-2)<sup>3)</sup> are valid if the damping is switched off:

Level measurement		
Probe length	Sampling rate	Step response time
< 10 m (33 ft)	3.6 measurements/second	< 0.8 s
< 40 m (131 ft)	$\geq 2.7$ measurements/second	< 1 s

**Influence of ambient temperature**

The measurements are carried out in accordance with EN 61298-3


- digital (HART, PROFIBUS PA, FOUNDATION Fieldbus): average  $T_K = 0.6$  mm/10 K
- analog (current output):
  - zero point (4 mA): average  $T_K = 0.02$  %/10 K
  - span (20 mA): average  $T_K = 0.05$  %/10 K

3) According to DIN EN 61209-2 the response time is the time which passes after a sudden change of the input signal until the output signal for the first time assumes 90% of the steady-state value.

## Mounting

### Mounting requirements

### Suitable mounting position

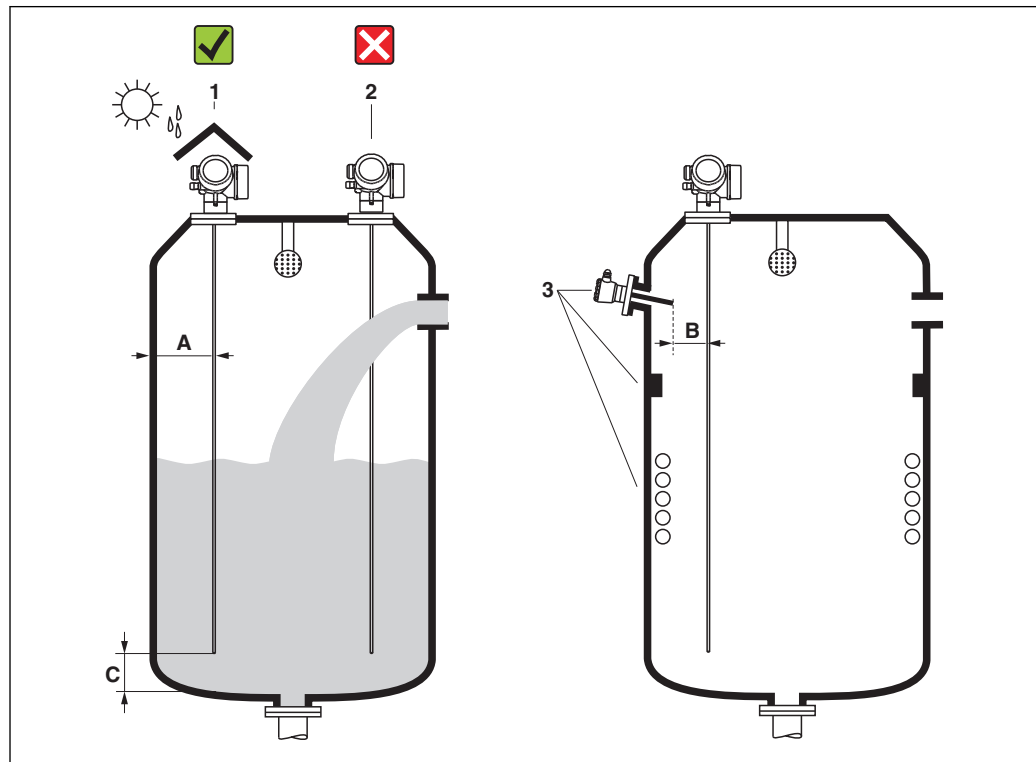


A0014130

13 Mounting requirements for Levelflex

### Mounting distances

- Distance (A) between wall and rod probe:
  - for smooth metallic walls: > 50 mm (2 in)
  - for plastic walls: > 300 mm (12 in) to metallic parts outside the vessel
- Distance (B) between rod probe and internal fittings (3) in the vessel: > 300 mm (12 in)
- When using more than one Levelflex:
  - Minimum distance between the sensor axes: 100 mm (3.94 in)
- Distance (C) from end of probe to bottom of the vessel: > 10 mm (0.4 in).


*Additional conditions*


- When mounting in the open, a weather protection cover (1) may be installed to protect the device against extreme weather conditions.
- Do not mount the probe in the filling curtain (2).
-  When mounting the electronics housing into a recess (e.g. in a concrete ceiling), observe a minimum distance of 100 mm (4 inch) between the cover of the terminal compartment / electronics compartment and the wall. Otherwise the connection compartment / electronics compartment is not accessible after installation.

## Applications with restricted mounting space


### Mounting with remote sensor

The device version with a remote sensor is suited for applications with restricted mounting space. In this case the electronics housing is mounted at a separate position from which it is easier accessible.

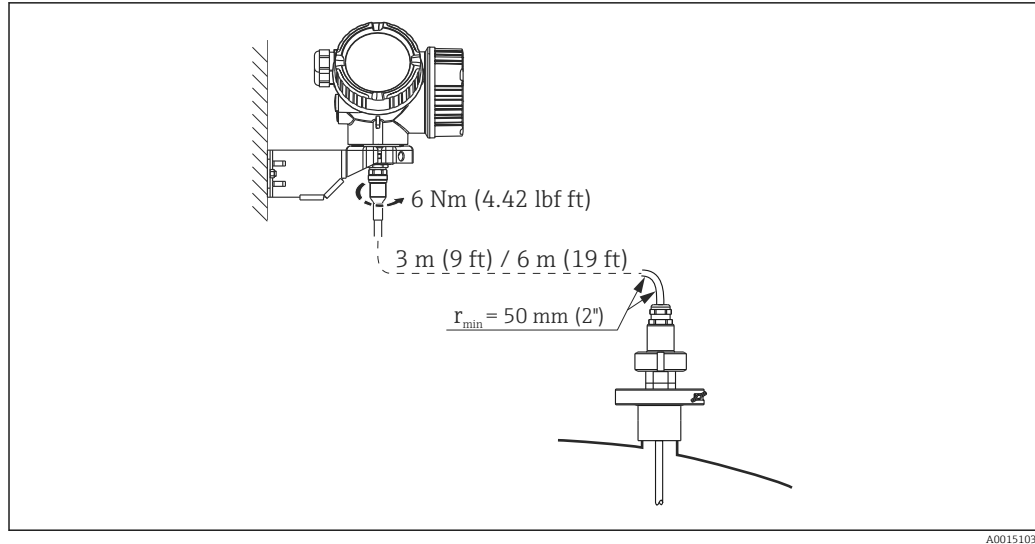

- Levelflex version (see product structure):
  - Feature 600 "Probe Design"
    - Option MB "Sensor remote, 3m/9ft cable, detachable+mounting bracket"
    - Option MC "Sensor remote, 6m/18ft cable, detachable+mounting bracket"
- On delivery, the connection cable is fixed to the probe.
  - Length: 3 m (9 ft) or 6 m (19 ft)
  - Minimum bending radius: 100 mm (4 inch)
- A mounting bracket for the electronics housing is supplied with this device version. Mounting options:
  - Wall mounting
  - Pipe mounting; diameter: 42 to 60 mm (1-1/4 to 2 inch)
-  The probe with connection cable and the electronics are adjusted to match each other. They are marked by a common serial number. Only components with the same serial number shall be connected to each other.

*Divisible probes*

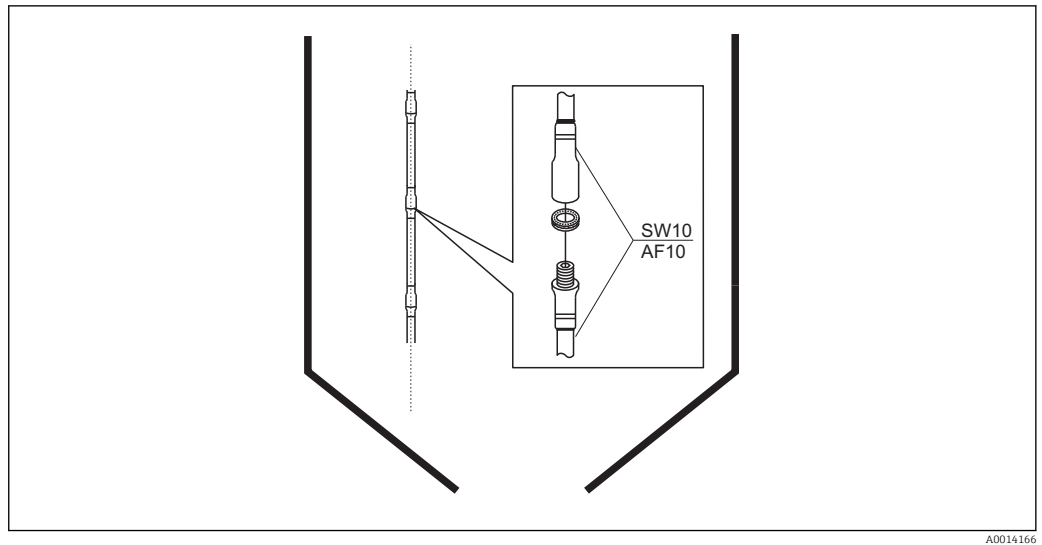

A0014166

If there is little mounting space (distance to the ceiling), it is advisable to use divisible rod probes ( $\phi$  8 mm).

- max. probe length 6 m/236 inch
- max. sideways capacity 10 Nm
- probes are separable several times with the following lengths of the individual parts:
  - 500 mm (20 in)
  - 1 000 mm (40 in)
- torque: 4.5 Nm
- The joints are sealed seamlessly with an O-ring.

 In order to avoid damages of the probe surface: Use plumber wrenches with plastic surface to mount the probe rod.

**Notes on the mechanical load of the probe**

*Bending strength of rod probes*

Sensor	Feature 060	Probe	Bending strength [Nm]
FMP53	DA, DB, EA, EB	Rod 8mm (0.31") 316L	10
	FA, FB, GA, GB, HA, HB, IA, IB	Rod 8mm (0.31") 316L divisible	10

*Bending load (torque) through fluid flow*

The formula for calculating the bending torque M impacting on the probe:

$$M = c_w \cdot \rho / 2 \cdot v^2 \cdot d \cdot L \cdot (L_N - 0.5 \cdot L)$$

with:

$c_w$ : Friction factor

$\rho$  [kg/m<sup>3</sup>]: Density of the medium

$v$  [m/s]: Velocity of the medium perpendicular to the probe rod

$d$  [m]: Diameter of the probe rod

$L$  [m]: Level

$L_N$  [m]: Probe length


**Calculation example**

Friction factor  $c_w$       0,9 (on the assumption of a turbulent current - high Reynolds number)


Density  $\rho$  [kg/m<sup>3</sup>]      1000 (e.g. water)

Probe diameter  $d$  [m]    0,008

$L = L_N$                       (worst case)

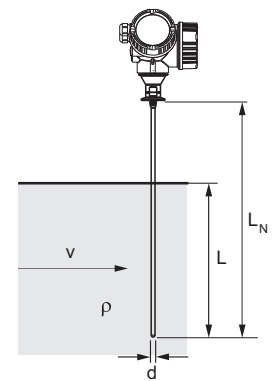


A0014175

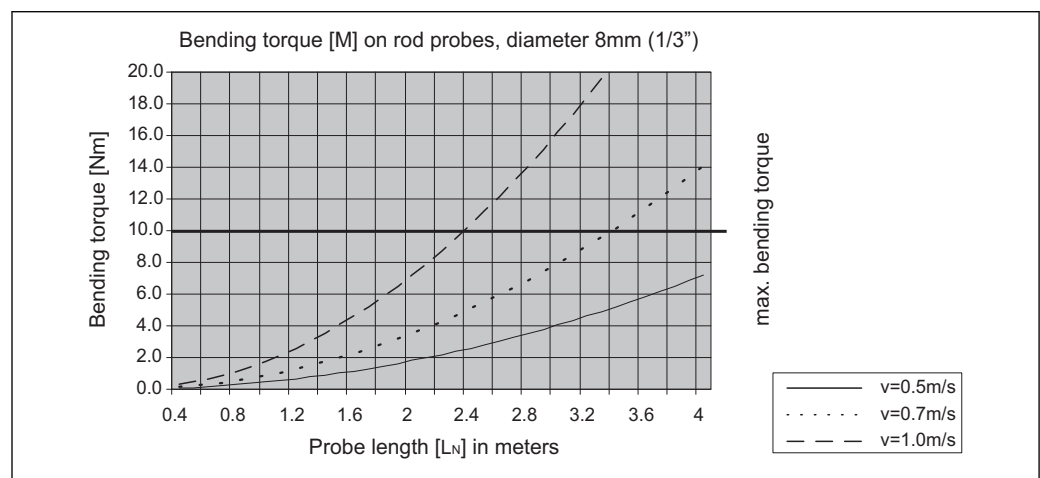

A0014182-EN

**Special mounting conditions**

*Tanks with spray ball for cleaning the probe*

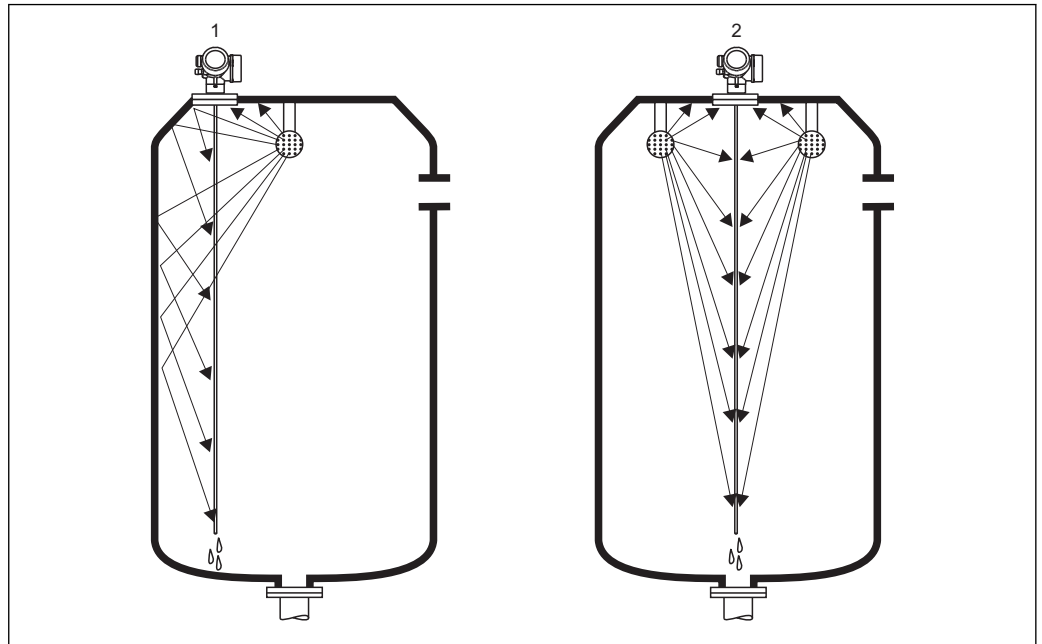


A0014131

*Installation close to tank wall*

By installing the probe close to the tank wall, the cleaning effect is improved in cases where a spray ball is used. The cleaning jet is deflected against the tank wall and onto the probe. This means that those parts of the probe are cleaned which would normally not be reached by the spray ball jet. If the probe is positioned in this way, only one spray ball is needed.

*Installation in the center of the tank*

If the probe is mounted in the center of the tank, it may be necessary to use a second spray ball. The spray balls should then be mounted to the left and right of the probe.

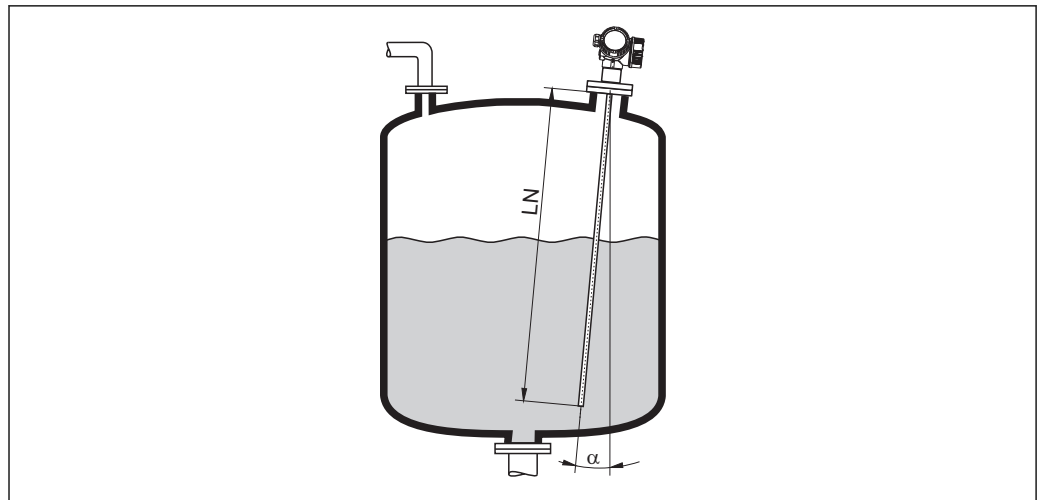
*Installation at an angle*

A0014145

- For mechanical reasons, the probe should be installed as vertically as possible.
- With inclined installations the probe length has to be adjusted in dependence to the installation angle.
  - Up to LN = 1 m (3.3 ft):  $\alpha = 30^\circ$
  - Up to LN = 2 m (6.6 ft):  $\alpha = 10^\circ$
  - Up to LN = 4 m (13.1 ft):  $\alpha = 5^\circ$



*Non-metallic vessels*

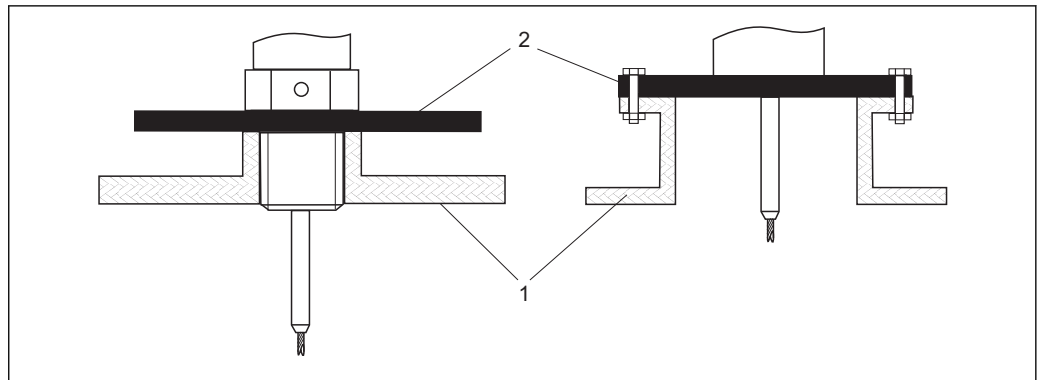


- 1 *Non-metallic vessel*
- 2 *Metal sheet or metal flange*

To measure, Levelflex with a rod or rope probe needs a metallic surface at the process connection.  
Therefore:

Mount a metal sheet with a diameter of at least 200 mm (8") to the probe at the process connection.  
Its orientation must be perpendicular to the probe.

*Plastic or glass tanks: Mounting the probe externally at the wall*

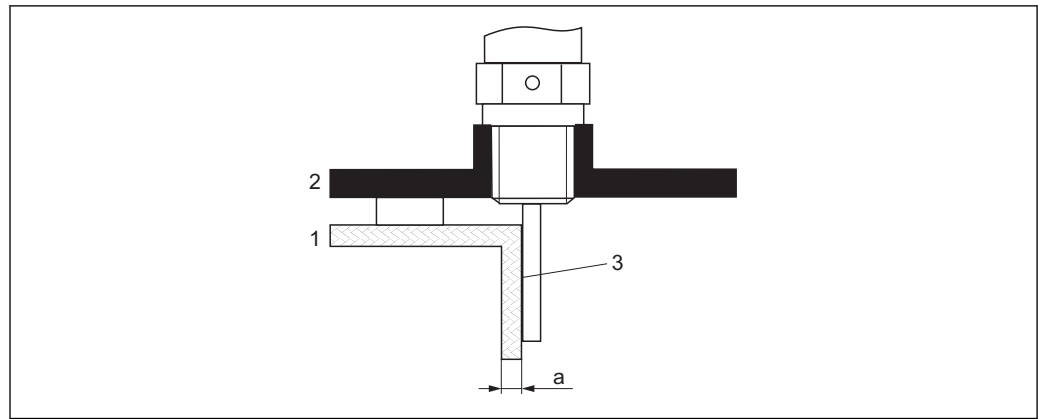

A0014150

- 1 Plastic or glass tank
- 2 Metall sheet with threaded sleeve
- 3 No free space between tank wall and probe!

#### **Requirements**


- The dielectric constant of the medium must be at least  $DC > 7$ .
- The tank wall must be non-conductive.
- Maximum wall thickness (a):
  - Plastic: < 15 mm (0.6")
  - Glass: < 10 mm (0.4")
- There may be no metallic reinforcements fixed to the tank.

#### **Mounting conditions:**

- The probe must be mounted directly to the tank wall (no open space)
- A plastic half pipe with a diameter of approx. 200 mm (8"), or some other protective unit, must be affixed externally to the probe to prevent any influences on the measurement.
- If the tank diameter is less than 300 mm (12"):
  - A metallic grounding sheet must be installed at the opposite side of the tank. The sheet must be conductively connected to the process connection and cover about the half of the vessel's circumference.
- If the tank diameter exceeds 300 mm (12"):
  - A metal sheet with a diameter of at least 200 mm (8") must be mounted to the probe at the process connection. Its orientation must be perpendicular to the probe (see above).

*Vessels with heat insulation*

**i** If process temperatures are high, the device must be included in normal tank insulation to prevent the electronics heating up as a result of heat radiation or convection. The insulation may not exceed beyond the points labeled "MAX" in the drawings.

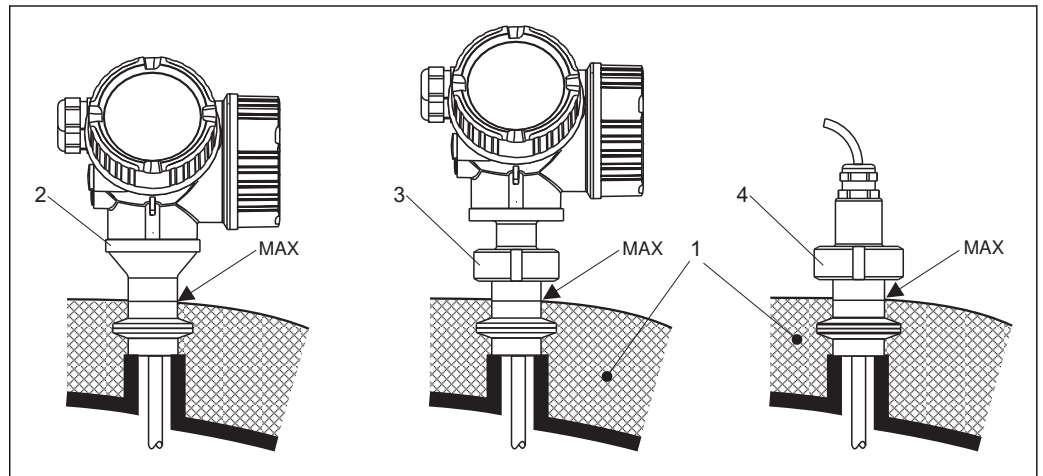

A0015809

**14** *Hygienic process connections - FMP53*


- 1 Tank insulation
- 2 Compact device
- 3 Compact device, detachable (feature 600)
- 4 Sensor remote (feature 600)

## Operating conditions: Environment

<b>Ambient temperature range</b>	<b>Measuring device</b>	-40 to +80 °C (-40 to +176 °F)
	<b>Local display</b>	-20 to +70 °C (-4 to +158 °F), the readability of the display may be impaired at temperatures outside the temperature range.
	<b>Connection cable (for "Probe Design" = "Sensor remote")</b>	150 °C (302 °F)
	<b>Remote display FHX50</b>	-40 to 80 °C (-40 to 176 °F)


When operating the device in the open with strong sunlight:

- Mount the device in a shady position.
- Avoid direct sunlight, especially in warmer regions.
- Use a weather protection cover (see accessories).

**Ambient temperature limits** The following diagrams take into account only function requirements. There may be further restrictions for certified device versions. Please refer to the separate Safety Instructions →  87.

With a temperature ( $T_p$ ) at the process connection the admissible ambient temperature ( $T_a$ ) is reduced according to the following diagram (temperature derating):

Temperature derating for FMP53

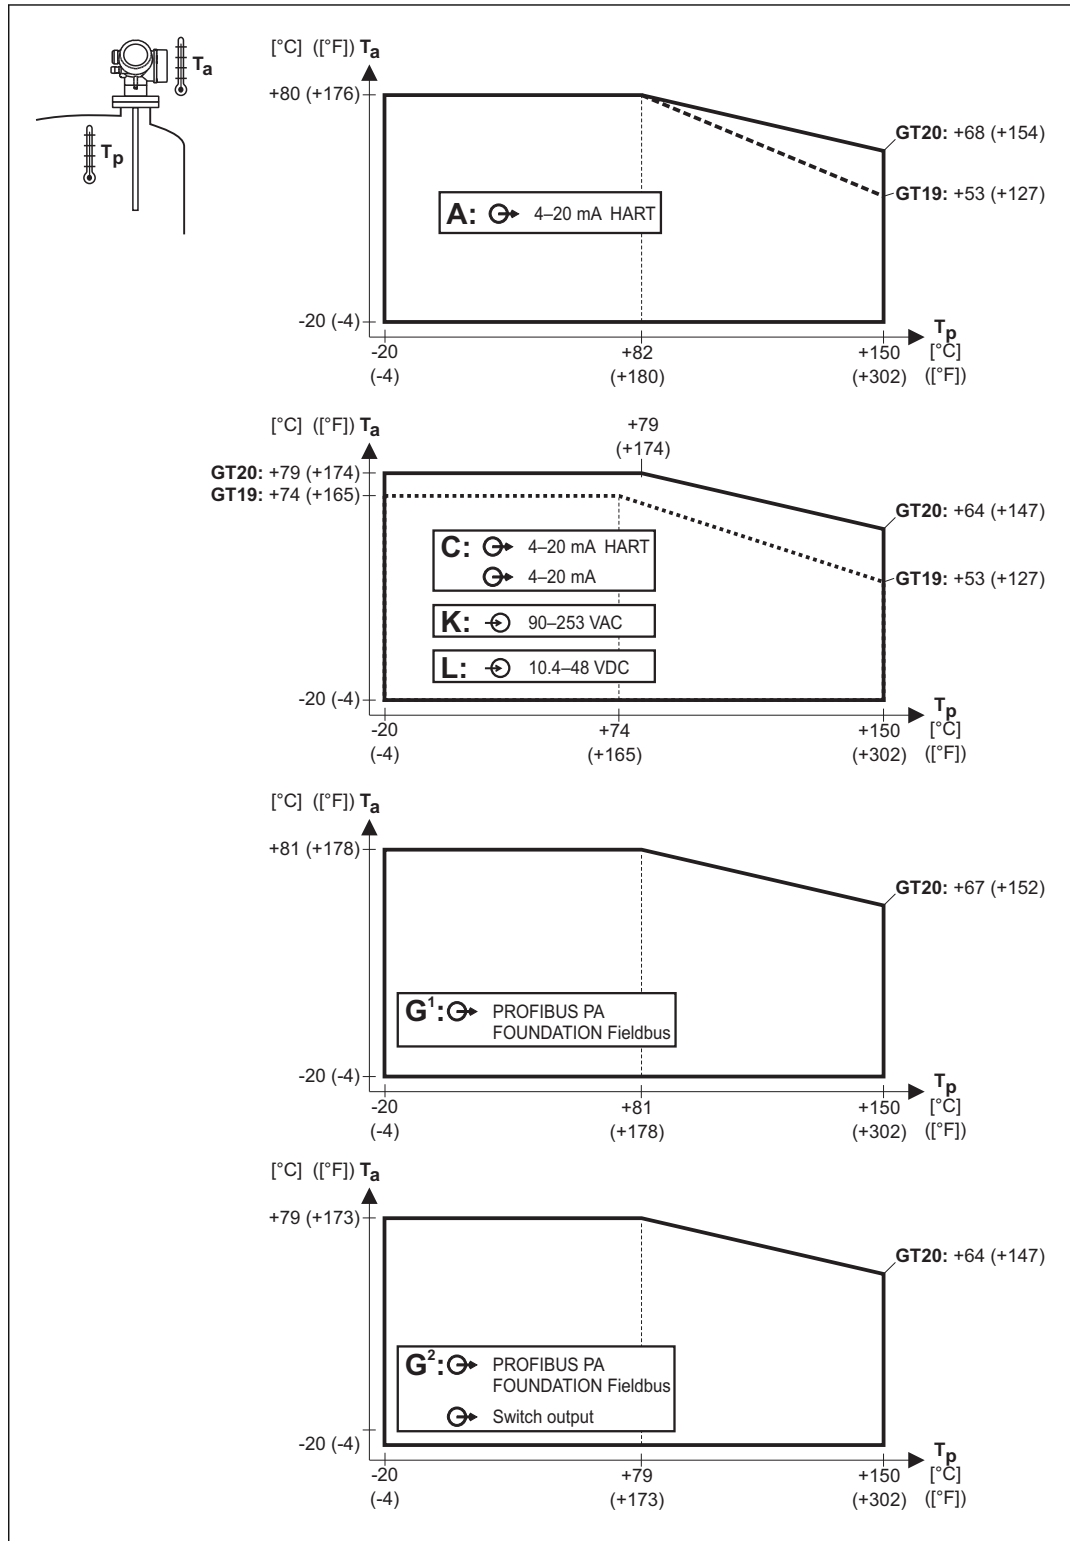


A0013635

GT19 = plastic housing  
GT20 = aluminum housing

A = 1 current output  
C = 2 current outputs  
G<sup>1</sup>, G<sup>2</sup> = PROFIBUS PA <sup>1)</sup>  
K, L = 4-wire

$T_a$  = ambient temperature  
 $T_p$  = temperature at the process connection

1) For PROFIBUS PA and FOUNDATION Fieldbus the temperature derating depends on the usage of the switch output. (G<sup>1</sup>: switch output not connected; G<sup>2</sup>: switch output connected).

<b>Storage temperature</b>	-40 to +80 °C (-40 to +176 °F)
<b>Climate class</b>	DIN EN 60068-2-38 (test Z/AD)
<b>Altitude according to IEC61010-1 Ed.3</b>	Up to 2 000 m (6 600 ft) above MSL.
<b>Degree of protection</b>	<ul style="list-style-type: none"> <li>■ With closed housing tested according to: <ul style="list-style-type: none"> <li>- IP68, NEMA6P (24 h at 1.83 m under water surface) <sup>4)</sup></li> <li>- For plastic housing with transparent cover (display module): IP68 (24 h at 1.00 m under water surface) <sup>5)</sup></li> <li>- IP66, NEMA4X</li> </ul> </li> <li>■ With open housing: IP20, NEMA1</li> <li>■ Display module: IP22, NEMA2</li> </ul> <p> Degree of protection IP68 NEMA6P applies for M12 PROFIBUS PA plugs only when the PROFIBUS cable is plugged in and is also rated IP68 NEMA6P.</p>
<b>Vibration resistance</b>	DIN EN 60068-2-64 / IEC 60068-2-64: 20 to 2 000 Hz, 1 (m/s <sup>2</sup> )/Hz
<b>Cleaning the probe</b>	Depending on the application, contamination or buildup can accumulate on the probe. A thin, even layer only influences measurement slightly. Thick layers can dampen the signal and then reduce the measuring range. Severe, uneven buildup, adhesion e.g. through crystallization, can lead to incorrect measurement. In this case, we recommend that you use a non-contact measuring principle, or check the probe regularly for soiling.
<b>Electromagnetic compatibility (EMC)</b>	<p>Electromagnetic compatibility to all relevant requirements of the EN 61326- series and NAMUR recommendation EMC (NE21). For details see declaration of conformity. <sup>6)</sup> If only the analogue signal is used, unshielded interconnection lines are sufficient for the installation. In case of using the digital signal (HART/ PA/ FF) use shielded interconnection lines.</p> <p>Use a shielded cable when working with a digital communications signal.</p> <p>Max. fluctuations during EMC- tests: &lt; 0.5 % of the span.</p> <p>When installing the probes in metal and concrete tanks and when using a coax probe:</p> <ul style="list-style-type: none"> <li>■ Interference emission to EN 61326 - x series, electrical equipment Class B.</li> <li>■ Interference immunity to EN 61326 - x series, requirements for industrial areas and NAMUR Recommendation NE 21 (EMC)</li> </ul> <p>The measured value can be affected by strong electromagnetic fields when installing rod and rope probes without a shielding/metallic wall, e.g. in plastic and wooden silos.</p> <ul style="list-style-type: none"> <li>■ Interference emission to EN 61326 - x series, electrical equipment Class A.</li> <li>■ Interference immunity: the measured value can be affected by strong electromagnetic fields.</li> </ul>

4) also valid for the "Sensor remote" version

5) This restriction is valid if the following options of the product structure have been selected at the same time: 030("Display, Operation") = C("SD02") or E("SD03"); 040("Housing") = A("GT19").

6) Can be downloaded from [www.endress.com](http://www.endress.com).

## Process

**Process temperature range** The maximum permitted temperature at the process connection is determined by the O-ring version ordered:

Device	O-ring material	Process temperature	Approval
FMP53	EPDM (Freudenberg 70 EPDM 291)	-20 to +130 °C (-4 to +266 °F)	FDA 3A <sup>1)</sup> EHEDG USP Cl. VI <sup>2)</sup>
	FFKM (Kalrez 6221)	-20 to +150 °C (-4 to +302 °F)	FDA 3A <sup>3)</sup> EHEDG USP Cl. VI <sup>2)</sup>
	FKM (PPE V70SW)	-10 to +150 °C (+10 to +302 °F)	FDA 3A <sup>3)</sup> EHEDG USP Cl. VI <sup>2)</sup>

- 1) Tested acc. to 3A Sanitary Standard 18-03, Class II
- 2) Tested acc. to USP <88> Class VI - 121°C
- 3) Tested acc. to 3A Sanitary Standard 18-03, Class I

**Process pressure range**

Device	Process pressure
FMP53	-1 to 16 bar (-14.5 to 232 psi)



This range may be reduced by the selected process connection. The pressure rating (PN) specified on the flanges refers to a reference temperature of 20 °C. Pay attention to pressure-temperature dependencies.


**Dielectric constant (DC)**

Rod probe: DC ( $\epsilon_r$ )  $\geq$  1.6

## Mechanical construction

### Dimensions


#### Dimensions of the electronics housing

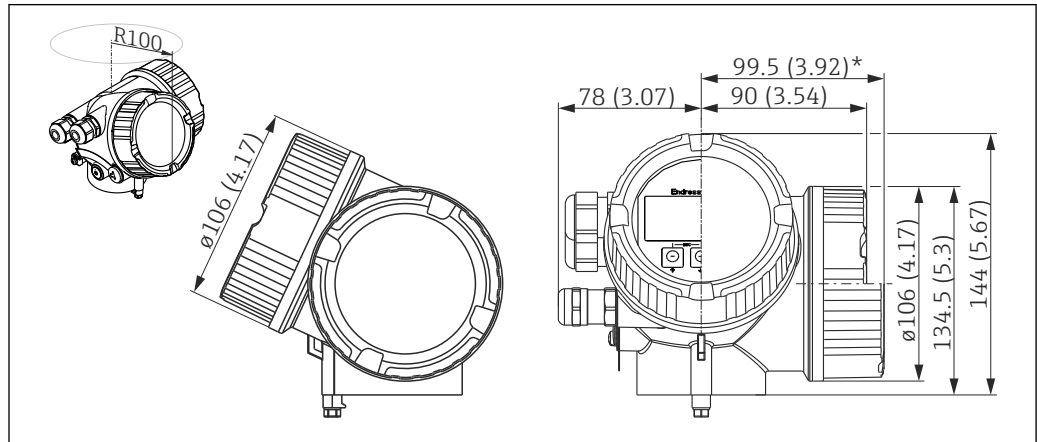

A0011346

15 Housing GT19 (Plastics PBT); Dimensions in mm (in)

\*for devices with integrated overvoltage protection.

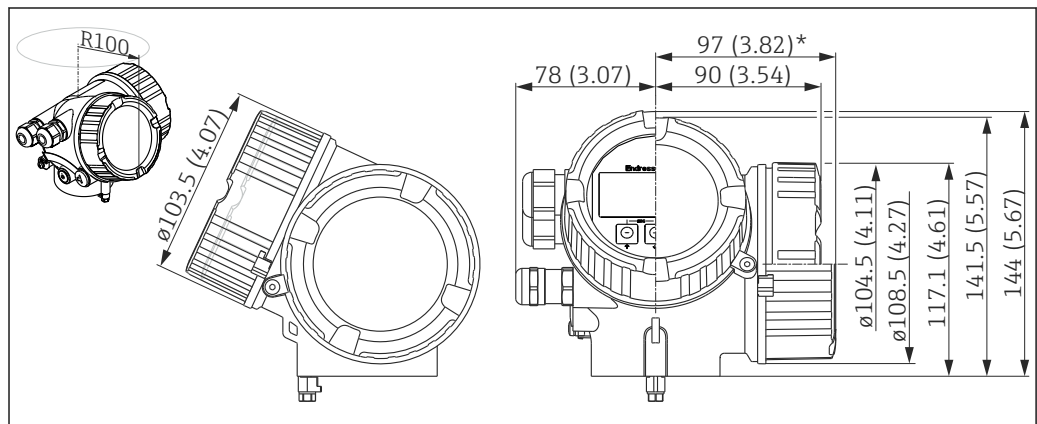


A0020751

16 Housing GT20 (Alu coated); Dimensions in mm (in)

\*for devices with integrated overvoltage protection.



Dimensions of the mounting bracket

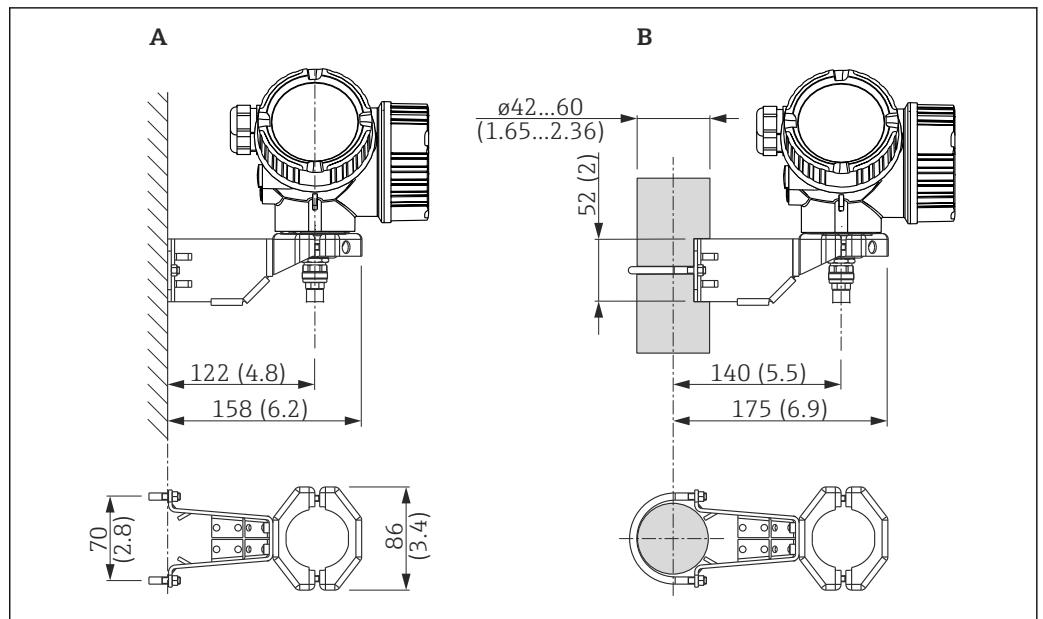

A0014793







17 Mounting bracket for the electronics housing: dimensions: mm (in)








A Wall mounting

B Pipe mounting

**i** For the "Sensor remote" device version (see feature 060 of the product structure), the mounting bracket is part of the delivery. If required, it can also be ordered as an accessory (order code 71102216).


FMP53: Dimensions of process connection

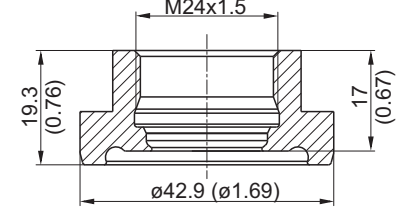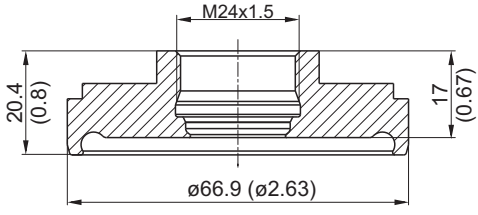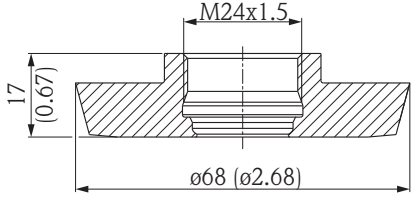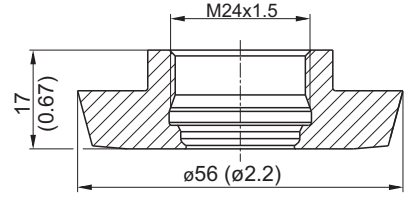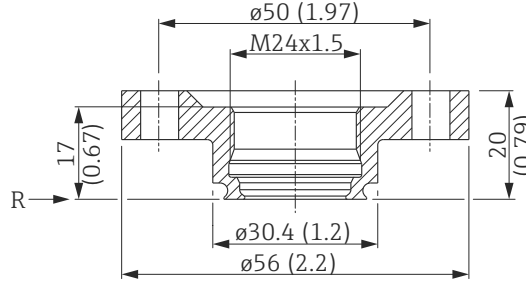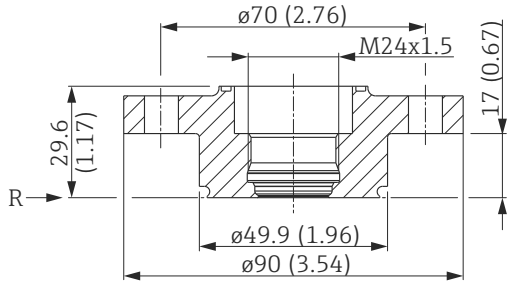Version	Dimensions Measuring unit: mm (in)
<p>MAJ DIN11864-1 A DN25 tube DIN11866-A, 316L Sanitary compatibility: EHEDG</p>	 <p style="text-align: right;">A0012763</p>
<p>MDJ DIN11864-1 A DN50 tube DIN11866-A, 316L Sanitary compatibility: EHEDG</p>	 <p style="text-align: right;">A0012764</p>
<p>MOJ DIN11851 DN50 PN40 cap-nut, 316L Sanitary compatibility: EHEDG</p>	 <p style="text-align: right;">A0012766</p>
<p>MQJ DIN11851 DN40 PN40 cap-nut, 316L Sanitary compatibility: EHEDG</p>	 <p style="text-align: right;">A0012765</p>
<p>S1J NEUMO BioControl D25 PN16, 316L</p>	 <p style="text-align: right;">A0012767</p> <p><i>R Reference point of the measurement</i></p>
<p>S4J NEUMO BioControl D50 PN16, 316L (Not available with Probe Design "Sensor compact", feature 600, option MA)</p>	 <p style="text-align: right;">A0012768</p> <p><i>R Reference point of the measurement</i></p>

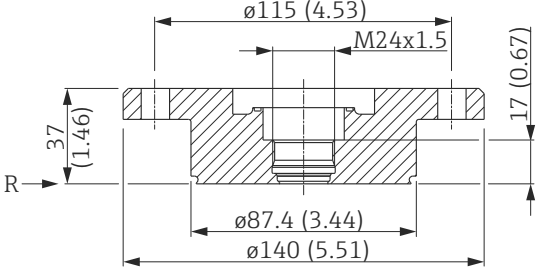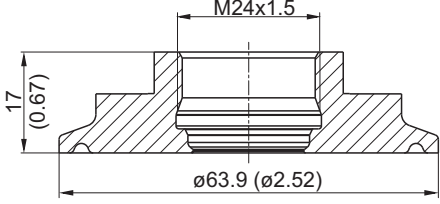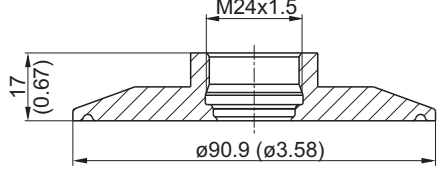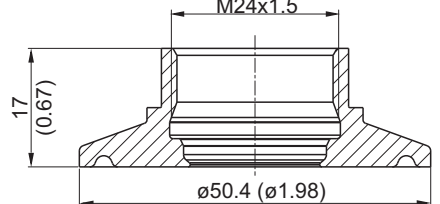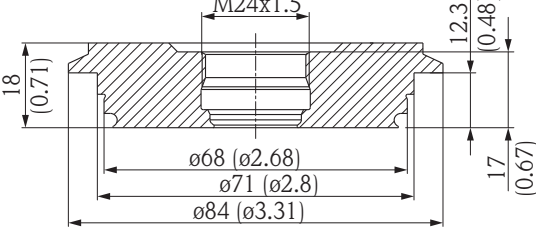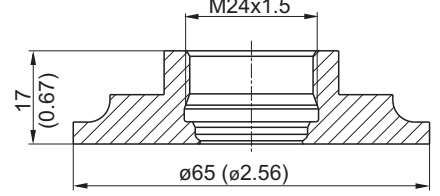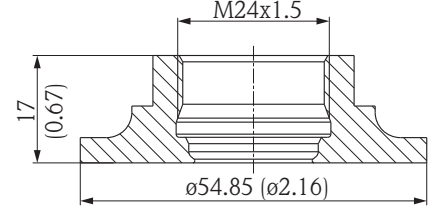Version	Dimensions Measuring unit: mm (in)
<p>S6J NEUMO BioControl D80 PN16, 316L (Not available with Probe Design "Sensor compact", feature 600, option MA)</p>	 <p><math>\phi 115</math> (4.53) M24x1.5 R 37 (1.46) <math>\phi 87.4</math> (3.44) <math>\phi 140</math> (5.51) 17 (0.67)</p> <p>A0012769</p> <p>R Reference point of the measurement</p>
<p>TDJ Tri-Clamp ISO2852 DN40-51 (2"), 316L Sanitary compatibility: EHEDG; 3A</p>	 <p>M24x1.5 17 (0.67) <math>\phi 63.9</math> (<math>\phi 2.52</math>)</p> <p>A0012770</p>
<p>TFJ Tri-Clamp ISO2852 DN70-76.1 (3"), 316L Sanitary compatibility: EHEDG; 3A</p>	 <p>M24x1.5 17 (0.67) <math>\phi 90.9</math> (<math>\phi 3.58</math>)</p> <p>A0012771</p>
<p>TOJ Tri-Clamp ISO2852 DN25-38 (1...1-1/2"), 316L Sanitary compatibility: EHEDG; 3A</p>	 <p>M24x1.5 17 (0.67) <math>\phi 50.4</math> (<math>\phi 1.98</math>)</p> <p>A0012772</p>
<p>TSJ Varivent N pipe DN40-162 PN16, 316L Sanitary compatibility: EHEDG</p>	 <p>M24x1.5 18 (0.71) 12.3 (0.48) <math>\phi 68</math> (<math>\phi 2.68</math>) <math>\phi 71</math> (<math>\phi 2.8</math>) <math>\phi 84</math> (<math>\phi 3.31</math>) 17 (0.67)</p> <p>A0012773</p>
<p>TXJ SMS 2" PN25, 316L</p>	 <p>M24x1.5 17 (0.67) <math>\phi 65</math> (<math>\phi 2.56</math>)</p> <p>A0012774</p>
<p>T7J SMS 1-1/2" PN25, 316L</p>	 <p>M24x1.5 17 (0.67) <math>\phi 54.85</math> (<math>\phi 2.16</math>)</p> <p>A0012775</p>

Version	Dimensions Measuring unit: mm (in)
<p>U1J Thread M24, 316L</p> <p>For the process connection U1J you need the following weld-in adapter: Order code: 71041381 <math>P_{max} = 16 \text{ bar (232 psi)}</math> Material: 316L (1.4435)</p>	<p style="text-align: right;">A0014608</p> <p style="text-align: right;">A0012776</p>

FMP53: Dimensions of probe

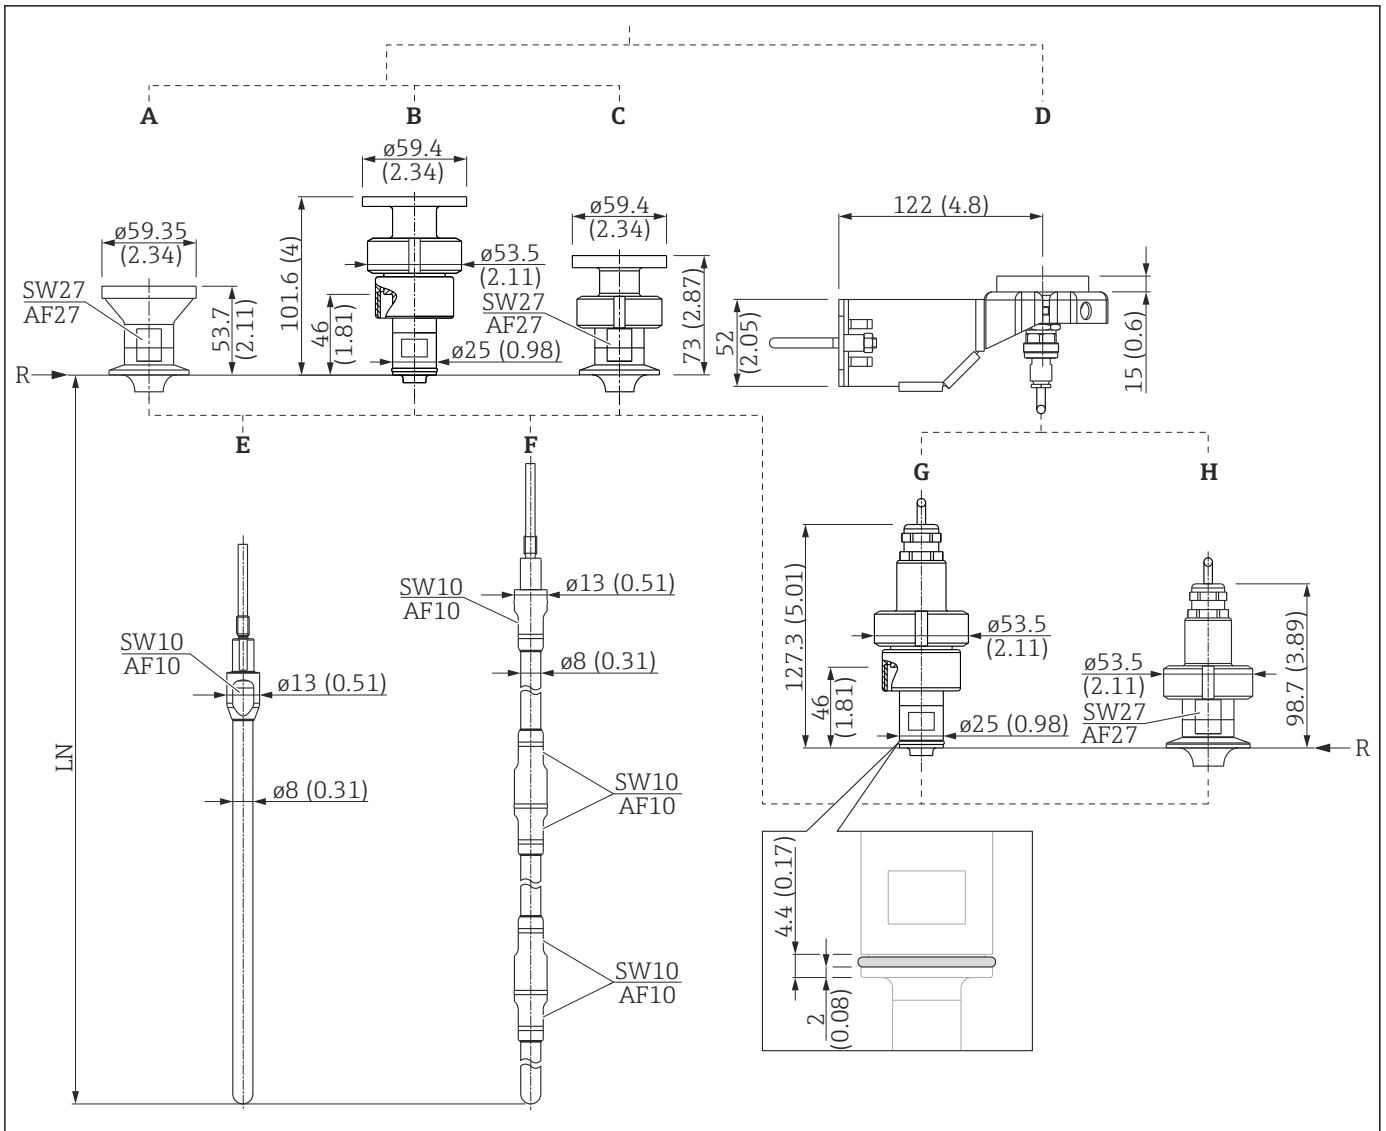

A0012762

18 FMP53: Probe; dimensions: mm (in). Unit of measurement mm (in)

- A Sensor compact (No option selected in feature 600)
- B Sensor compact, detachable, with Ingold fitting
- C Sensor compact, detachable (Feature 600)
- D Mounting bracket for probe design "Sensor remote" (Feature 600)
- E Rod probe 8mm or 1/3" (Feature 060)
- F Rod probe 8mm or 1/3", 20in or 40in divisible (Feature 060)
- G Ingold fitting for probe design "Sensor remote"
- H Other process connections for probe design "Sensor remote"
- LN Length of probe
- R Reference point of the measurement

**i** For NEUMO BioControl process connections (versions S1J, S4J and S6J), the reference point of the measurement is slightly below the flange → 50.

**Tolerance of probe length**

Rod probes		
Rod length	<1 (<3,3)	1...<4 (3,3...<13)
Admissible tolerance [mm (in)]	+0 / -3 (-0,12)	+0 / -5 (-0,2)

**Weight**


*Housing*

Part	Weight
Housing GT19 - plastic	approx. 1.2 kg
Housing GT20 - aluminium	approx. 1.9 kg

*FMP53*

Part	Weight	Part	Weight
Sensor	approx. 1.2 kg	Rod probe 8 mm	approx. 0.4 kg/m probe length

Materials: GT19 housing

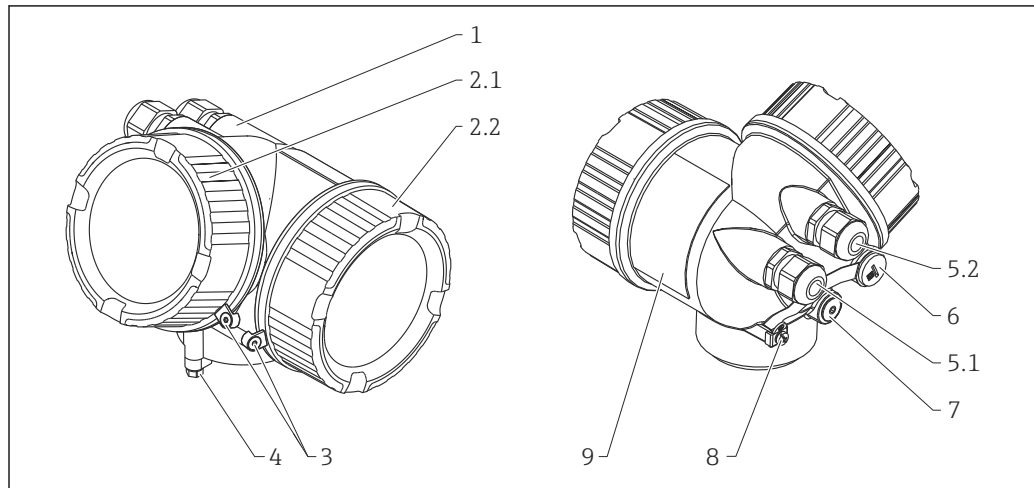

A0013788


No.	Part	Material
1	Housing	PBT
2.1	Cover of the electronics compartment	<ul style="list-style-type: none"> <li>■ Cover, depending on the device version:                             <ul style="list-style-type: none"> <li>- PA (see-through cover)</li> <li>- PBT (non-transparent cover)</li> </ul> </li> <li>■ Cover seal: EPDM</li> <li>■ Thread-coating: Graphite-based lubricant varnish</li> </ul>
2.2	Cover of the terminal compartment	<ul style="list-style-type: none"> <li>■ Cover: PBT</li> <li>■ Cover seal: EPDM</li> <li>■ Thread-coating: Graphite-based lubricant varnish</li> </ul>
4	Lock at the housing neck	<ul style="list-style-type: none"> <li>■ Screw: A4-70</li> <li>■ Clamp: 316L (1.4404)</li> </ul>
5.1	Dummy plug, cable gland, adapter or plug (depending on the device version)	<ul style="list-style-type: none"> <li>■ Dummy plug, depending on the device version:                             <ul style="list-style-type: none"> <li>- PE</li> <li>- PBT-GF</li> </ul> </li> <li>■ Cable gland, depending on the device version:                             <ul style="list-style-type: none"> <li>- Nickel-plated brass (CuZn)</li> <li>- PA</li> </ul> </li> <li>■ Adapter: 316L (1.4404/1.4435)</li> <li>■ Seal: EPDM</li> <li>■ M12 plug: Nickel-plated brass <sup>1)</sup></li> <li>■ 7/8" plug: 316 (1.4401) <sup>2)</sup></li> </ul>
5.2	Dummy plug, cable gland or adapter (depending on the device version)	<ul style="list-style-type: none"> <li>■ Dummy plug, depending on the device version:                             <ul style="list-style-type: none"> <li>- PE</li> <li>- PBT-GF</li> <li>- Nickel-plated steel</li> </ul> </li> <li>■ Cable gland, depending on the device version:                             <ul style="list-style-type: none"> <li>- Nickel-plated brass (CuZn)</li> <li>- PA</li> </ul> </li> <li>■ Adapter: 316L (1.4404/1.4435)</li> <li>■ Seal: EPDM</li> </ul>
6	Dummy plug or M12 socket (depending on the device version)	<ul style="list-style-type: none"> <li>■ Dummy plug: Nickel-plated brass (CuZn)</li> <li>■ M12 socket: Nickel-plated GD-Zn</li> </ul>
7	Pressure relief stopper	Nickel-plated brass (CuZn)
8	Ground terminal	<ul style="list-style-type: none"> <li>■ Screw: A2</li> <li>■ Spring washer: A4</li> <li>■ Clamp: 304 (1.4301)</li> <li>■ Holder: 304 (1.4301)</li> </ul>
9	Nameplate	Sticker

1) For the version with M12 plug the sealing material is Viton.

2) For the version with 7/8" plug, the sealing material is NBR.



Materials: GT20 housing

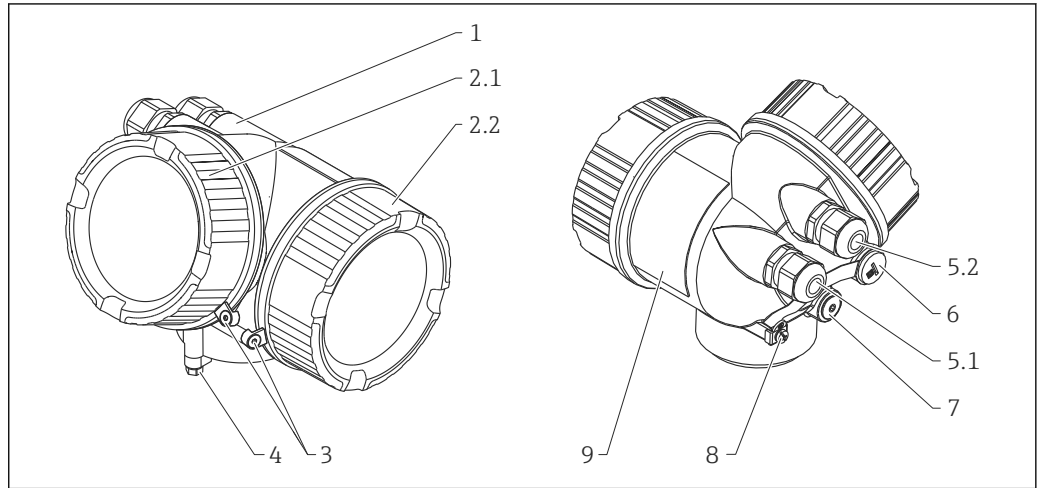

A0013788



Nr.	Part	Material
1	Housing, RAL 5012 (blue)	<ul style="list-style-type: none"> <li>▪ Housing: AlSi10Mg(&lt;0,1% Cu)</li> <li>▪ Coating: Polyester</li> </ul>
2.1	Cover of the electronics compartment; RAL 7035 (gray)	<ul style="list-style-type: none"> <li>▪ Cover: AlSi10Mg(&lt;0,1% Cu)</li> <li>▪ Window: Glass</li> <li>▪ Cover seal: EPDM</li> <li>▪ Seal of the window: NBR</li> <li>▪ Thread-coating: Graphite-based lubricant varnish</li> </ul>
2.2	Cover of the terminal compartment; RAL 7035 (gray)	<ul style="list-style-type: none"> <li>▪ Cover: AlSi10Mg(&lt;0,1% Cu)</li> <li>▪ Cover seal: EPDM</li> <li>▪ Thread-coating: Graphite-based lubricant varnish</li> </ul>
3	Cover lock	<ul style="list-style-type: none"> <li>▪ Screw: A4</li> <li>▪ Clamp: 316L (1.4404)</li> </ul>
4	Lock at the housing neck	<ul style="list-style-type: none"> <li>▪ Screw: A4-70</li> <li>▪ Clamp: 316L (1.4404)</li> </ul>
5.1	Dummy plug, cable gland, adapter or plug (depending on the device version)	<ul style="list-style-type: none"> <li>▪ Dummy plug, depending on the device version:                             <ul style="list-style-type: none"> <li>- PE</li> <li>- PBT-GF</li> </ul> </li> <li>▪ Cable gland, depending on the device version:                             <ul style="list-style-type: none"> <li>- Nickel-plated brass (CuZn)</li> <li>- PA</li> </ul> </li> <li>▪ Adapter: 316L (1.4404/1.4435)</li> <li>▪ Seal: EPDM</li> <li>▪ M12 plug: Nickel-plated brass<sup>1)</sup></li> <li>▪ 7/8" plug: 316 (1.4401)<sup>2)</sup></li> </ul>
5.2	Dummy plug, cable gland or adapter (depending on the device version)	<ul style="list-style-type: none"> <li>▪ Dummy plug, depending on the device version:                             <ul style="list-style-type: none"> <li>- PE</li> <li>- PBT-GF</li> <li>- Nickel-plated steel</li> </ul> </li> <li>▪ Cable gland, depending on the device version:                             <ul style="list-style-type: none"> <li>- Nickel-plated brass (CuZn)</li> <li>- PA</li> </ul> </li> <li>▪ Adapter: 316L (1.4404/1.4435)</li> <li>▪ Seal: EPDM</li> </ul>
6	Dummy plug or M12 socket (depending on the device version)	<ul style="list-style-type: none"> <li>▪ Dummy plug : Nickel-plated brass (CuZn)</li> <li>▪ M12 socket: Nickel-plated GD-Zn</li> </ul>
7	Pressure relief stopper	Nickel-plated brass (CuZn)

---



Nr.	Part	Material
8	Ground terminal	<ul style="list-style-type: none"><li>▪ Screw: A2</li><li>▪ Spring washer: A2</li><li>▪ Clamp: 304 (1.4301)</li><li>▪ Holder: 304 (1.4301)</li></ul>
9	Nameplate	Sticker

- 1) For the version with M12 plug the sealing material is Viton.
- 2) For the version with 7/8" plug, the sealing material is NBR.


**Materials: Process connection**

Levelflex FMP53				
Sensor not detachable	Sensor detachable	No.	Material	Approval
 <p>A0013904</p>	 <p>A0013903</p>	1	304 (1.4301)	—
		2	304 (1.4301)	—
		3	316L (1.4435)	—
		4	Ketron PEEK LSG	FDA, 3A, USP Cl. VI
		5	304L (1.4307)	—

Materials: Probe

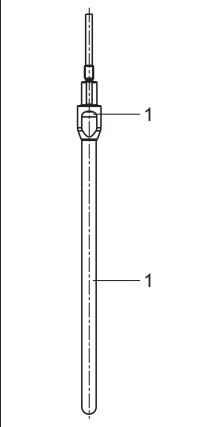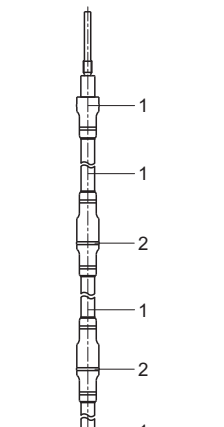Levelflex FMP53			
Rod probe		No.	Material
$\phi$ 8 mm (1/3")	$\phi$ 8 mm (1/3") divisible		
 <p>A0013872</p>	 <p>A0013873</p>	1	316L (1.4435) <ul style="list-style-type: none"> <li>■ 0.76 <math>\mu</math>m (30 <math>\mu</math>in) mechanically polished</li> <li>■ 0.38 <math>\mu</math>m (15 <math>\mu</math>in) electro-polished</li> </ul>
		2	O-ring (see sensor)


**Materials: Mounting bracket**

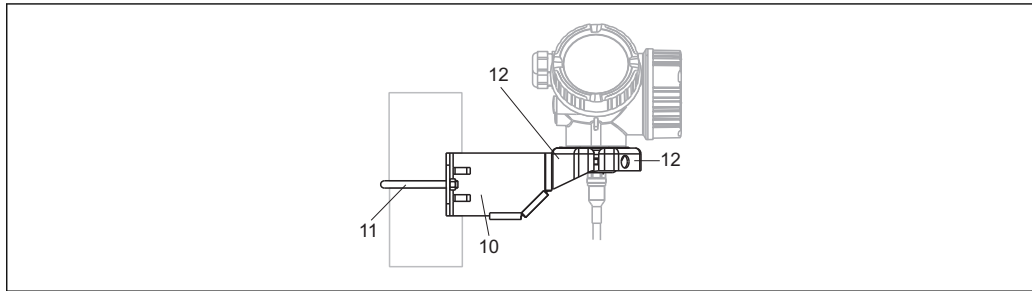

A0015143

Mounting bracket for version "Sensor remote"		
Position	Part	Material
10	Bracket	316L (1.4404)
11	Bracket	316Ti (1.4571)
	Screw/nuts	A4-70
	Distance sleeves	316Ti (1.4571) or 316L (1.4404)
12	Half-shells	316L (1.4404)


**Materials: Adapter and cable for remote display**

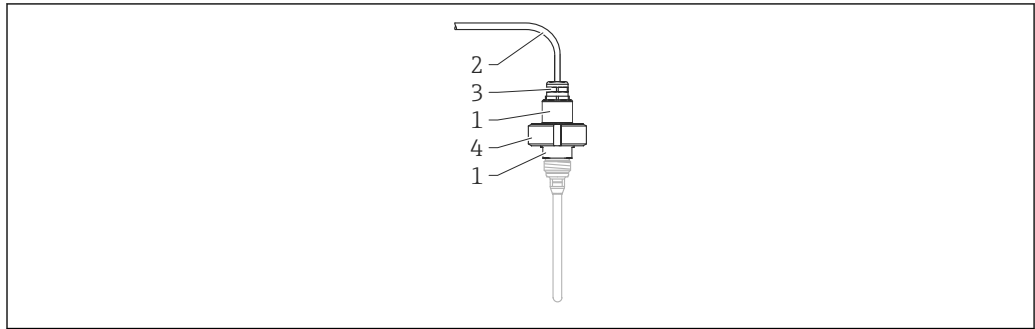

A0024684

Adapter and cable for version "Sensor remote"		
Position	Part	Material
1	Adapter (separable)	304 (1.4301)
2	Cable	FEP
3	Cable gland	CuZn nickel-plated
4	Counter nut	304 (1.4301)

**Materials: Weather protection cover**

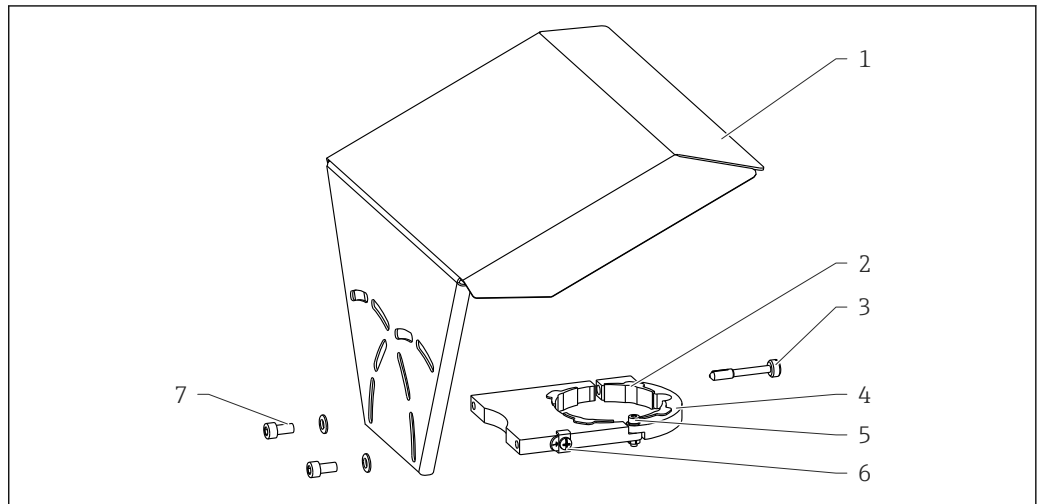

A0015473

No	Part: Material
1	Protection cover: 316L (1.4404)
2	Molded rubber part (4x): EPDM
3	Clamping screw: 316L (1.4404) + carbon fibre
4	Bracket: 316L (1.4404)
5	<ul style="list-style-type: none"> <li>▪ Cheese head screw: A4-70</li> <li>▪ Nut: A4</li> <li>▪ Spring washer: A4</li> </ul>
6	Ground terminal <ul style="list-style-type: none"> <li>▪ Screw: A4</li> <li>▪ Spring washer: A4</li> <li>▪ Clamp: 316L (1.4404)</li> <li>▪ Holder: 316L (1.4404)</li> </ul>
7	<ul style="list-style-type: none"> <li>▪ Washer: A4</li> <li>▪ Cheese head screw: A4-70</li> </ul>

# Operability

## Operating concept

### Operator-oriented menu structure for user-specific tasks

- Commissioning
- Operation
- Diagnostics
- Expert level

### Operating languages

- English (contained in every device)
- One additional language as ordered (feature 500 of the product structure)

### Quick and safe commissioning

- Interactive wizard with graphical interface for easy commissioning via FieldCare/DeviceCare
- Menu guidance with brief explanations of the individual parameter functions



### Reliable operation

- Standardized operation at the device and in the operating tools
- Data storage device (HistoROM) for process and measuring device data with event logbook available at all times - even if electronics modules are replaced

### Efficient diagnostics increase measurement reliability

- Remedy information is integrated in plain text
- Diverse simulation options and line recorder functions

## Local operation

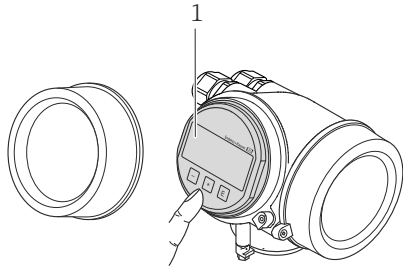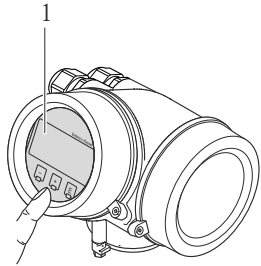Order code for "Display; Operation", option C "SD02"	Order code for "Display; Operation", option E "SD03"
 <p style="text-align: right; font-size: small;">A0015544</p>	 <p style="text-align: right; font-size: small;">A0015546</p>
1 <i>Operation with pushbuttons</i>	1 <i>Operation with touch control</i>

### Display elements

- 4-line display
- In the case of order code for "Display; Operation", option E: white background lighting; switches to red in event of device errors
- Format for displaying measured variables and status variables can be individually configured
- Permitted ambient temperature for the display: -20 to +70 °C (-4 to +158 °F)  
The readability of the display may be impaired at temperatures outside the temperature range.

### Operating elements


- In the case of order code "Display; Operation", Option C: local operation with 3 push buttons (⊖, ⊕, ⊗)
- In the case of order code for "Display; Operation", option E: external operation via touch control; 3 optical keys: ⊖, ⊕, ⊗
- Operating elements also accessible in various hazardous areas

### Additional functionality

- Data backup function  
The device configuration can be saved in the display module.
- Data comparison function  
The device configuration saved in the display module can be compared to the current device configuration.
- Data transfer function  
The transmitter configuration can be transmitted to another device using the display module.



**Operation with remote display and operating module FHX50**

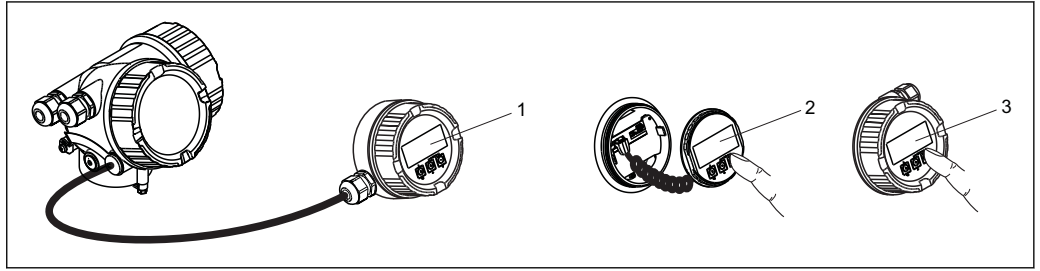


A0013137

19 FHX50 operating options

- 1 Housing of the remote display and operating module FHX50
- 2 Display and operating module SD02, push buttons; cover must be removed
- 3 Display and operating module SD03, optical keys; can be operated through the glass of the cover

**Remote operation**

**Via HART protocol**

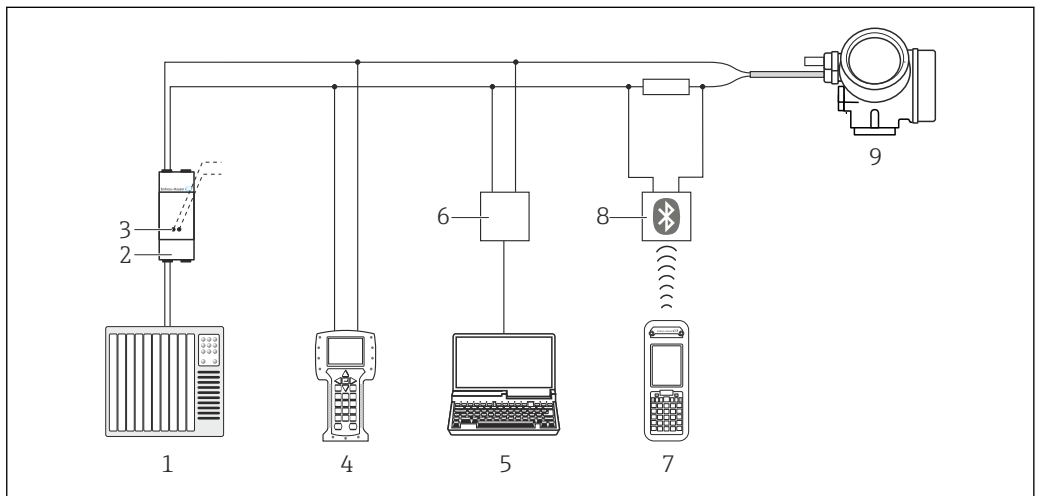


A0013764

20 Options for remote operation via HART protocol

- 1 PLC (programmable logic controller)
- 2 Transmitter power supply unit, e.g. RN221N (with communication resistor)
- 3 Connection for Commubox FXA191, FXA195 and Field Communicator 375, 475
- 4 Field Communicator 475
- 5 Computer with operating tool (e.g. FieldCare, AMS Device Manager, SIMATIC PDM)
- 6 Commubox FXA191 (RS232) or FXA195 (USB)
- 7 Field Xpert SFX350/SFX370
- 8 VIATOR Bluetooth modem with connecting cable
- 9 Transmitter


Via PROFIBUS PA protocol

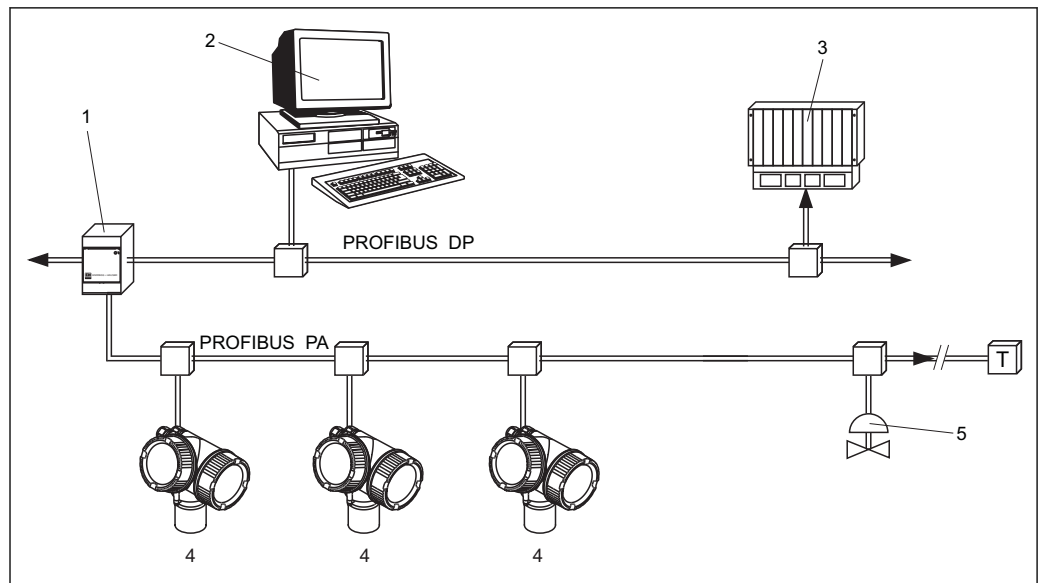

A0015775

- 1 Segment coupler
- 2 Computer with Profiboard/Proficard and operating tool (e.g. FieldCare)
- 3 PLC (Programmable Logic Controller)
- 4 Transmitter
- 5 Additional functions (valves etc.)

Via FOUNDATION Fieldbus

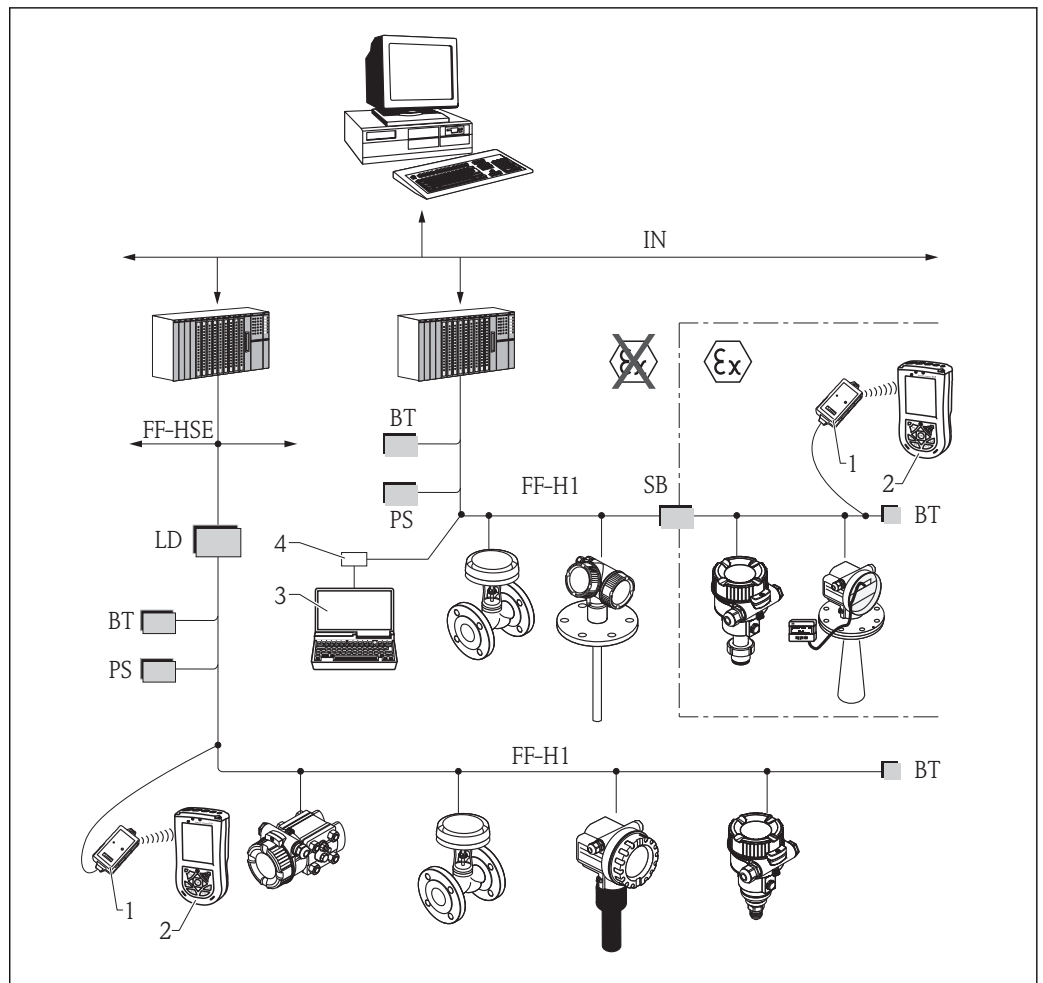


A0017188

21 FOUNDATION Fieldbus system architecture with associated components

- 1 FFblue Bluetooth modem
- 2 Field Xpert SFX350/SFX370
- 3 FieldCare
- 4 NI-FF interface card

IN	Industrial network
FF-HSE	High Speed Ethernet
FF-H1	FOUNDATION Fieldbus-H1
LD	Linking Device FF-HSE/FF-H1
PS	Bus Power Supply
SB	Safety Barrier
BT	Bus Terminator

Via service interface (CDI)

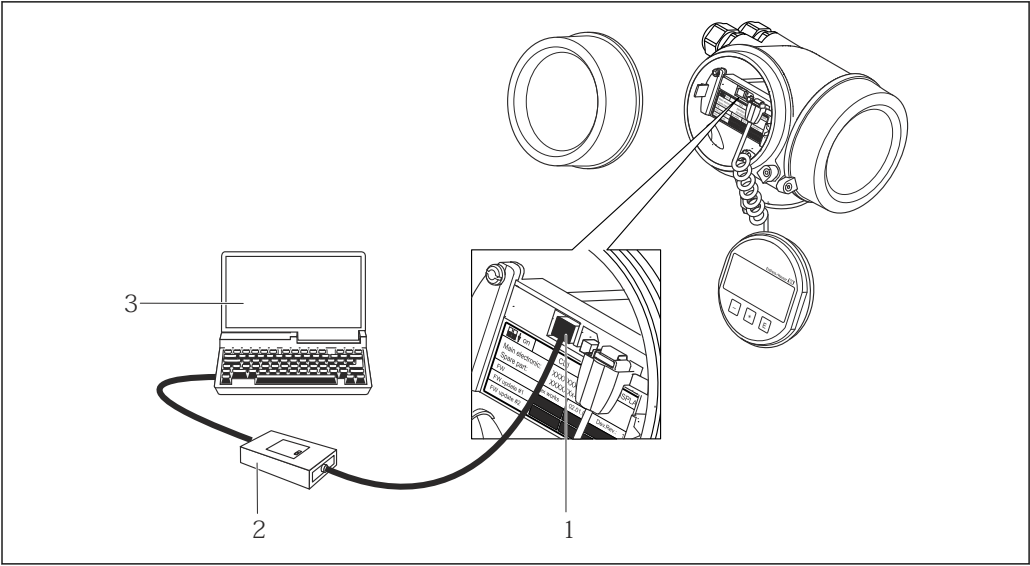


A0014019

- 1 Service interface (CDI) of the measuring device (= Endress+Hauser Common Data Interface)
- 2 Commubox FXA291
- 3 Computer with "FieldCare" operating tool

**Integration in tank gauging system**

The Endress+Hauser Tank Side Monitor NRF590 provides integrated communications for sites with multiple tanks, each with one or more sensors on the tank, such as radar, spot or average temperature, capacitive probe for water detection and/or pressure sensors. Multiple protocols out of the Tank Side Monitor guarantee connectivity to nearly any of the existing industry standard tank gauging protocols. Optional connectivity of analog 4...20 mA sensors, digital I/O and analog output simplify full tank sensor integration. Use of the proven concept of the intrinsically safe HART bus for all on-tank sensors yields extremely low wiring costs, while at the same time providing maximum safety, reliability and data availability.

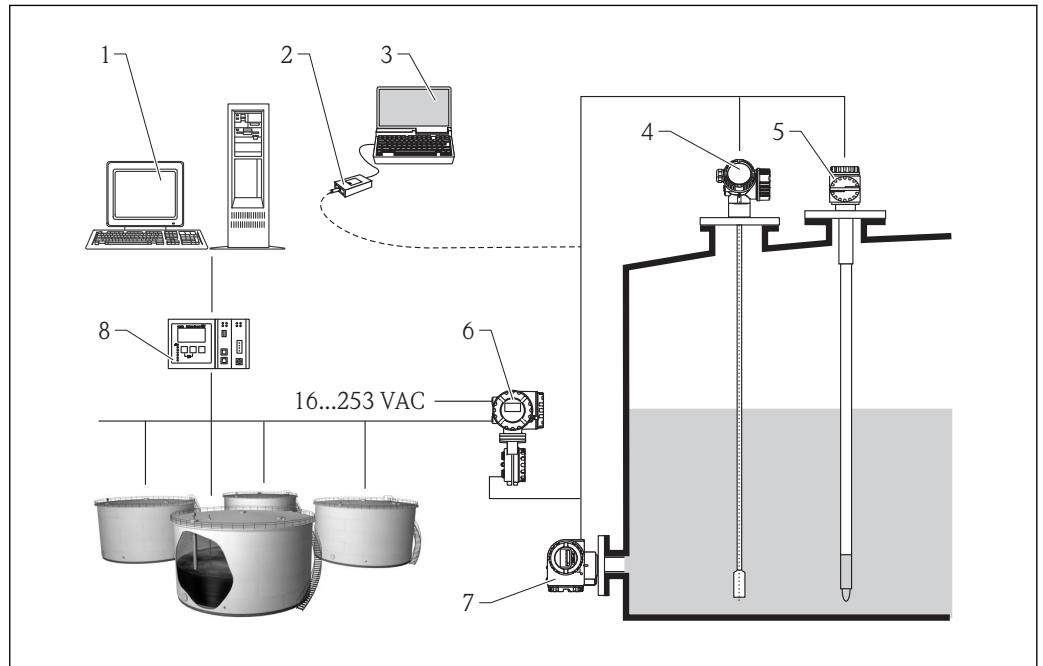

A0016590

22 The complete measuring system consists of:

- 1 Tankvision workstation
- 2 Commubox FXA195 (USB) - optional
- 3 Computer with operating tool (ControlCare) - optional
- 4 Level measuring device
- 5 Temperature measuring device
- 6 Tank Side Monitor NRF590
- 7 Pressure measuring device
- 8 Tankvision Tank Scanner NXA820


**System integration via Fieldgate**

**Vendor Managed Inventory**

By using Fieldgates to interrogate tank or silo levels remotely, suppliers of raw materials can provide their regular customers with information about the current supplies at any time and, for example, account for them in their own production planning. For their part, the Fieldgates monitor the configured level limits and, if required, automatically activate the next supply. The spectrum of options here ranges from a simple purchasing requisition via e-mail through to fully automatic order administration by coupling XML data into the planning systems on both sides.

**Remote maintenance of measuring equipment**

Fieldgates not only transfer the current measured values, they also alert the responsible standby personnel, if required, via e-mail or SMS. In the event of an alarm or also when performing routine checks, service technicians can diagnose and configure connected HART devices remotely. All that is required for this is the corresponding HART operating tool (e.g. FieldCare, ...) for the connected device. Fieldgate passes on the information transparently, so that all options for the respective operating software are available remotely. Some on-site service operations can be avoided by using remote diagnosis and remote configuration and all others can at least be better planned and prepared.

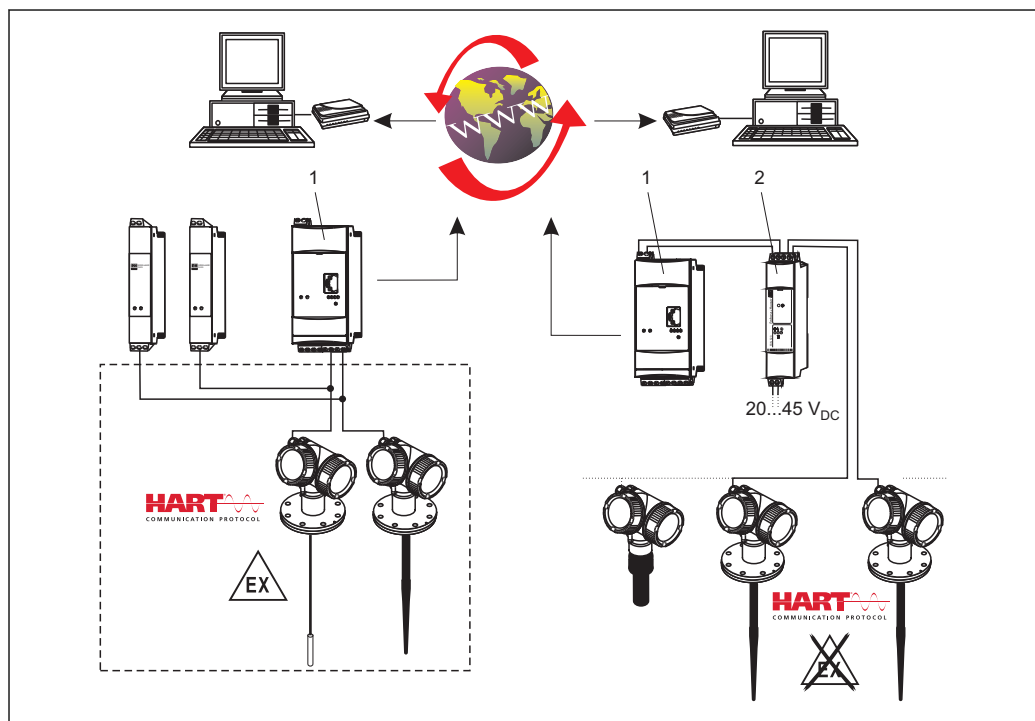

23 The complete measuring system consists of devices and:



- 1 Fieldgate FXA520
- 2 Multidrop Connector FXN520

**i** The number of instruments which can be connected in mutidrop mode can be calculated by the "FieldNetCalc" program. A description of this program can be found in Technical Information TI 400F (Multidrop Conncector FXN520). The program is available form your Endress+Hauser sales organisation or in the internet at: [www.de.endress.com/Download](http://www.de.endress.com/Download) (text search = "Fieldnetcalc").

---

## Certificates and approvals


---

<b>CE mark</b>	<p>The measuring system meets the legal requirements of the applicable EC guidelines. These are listed in the corresponding EC Declaration of Conformity together with the standards applied.</p> <p>Endress+Hauser confirms successful testing of the device by affixing to it the CE mark.</p>
<b>C-Tick symbol</b>	<p>The measuring system meets the EMC requirements of the "Australian Communications and Media Authority (ACMA)".</p>
<b>Ex approval</b>	<p>The devices are certified for use in hazardous areas and the relevant safety instructions are provided in the separate "Safety Instructions" (XA) document. Reference is made to this document on the nameplate.</p> <p> The separate documentation "Safety Instructions" (XA) containing all the relevant explosion protection data is available from your Endress+Hauser Sales Center. Correlation of documentations to the device →  87.</p>
<b>Dual seal according to ANSI/ISA 12.27.01</b>	<p>The devices have been designed according to ANSI/ISA 12.27.01 as dual seal devices, allowing the user to waive the use and save the cost of installing external secondary process seals in the conduit as required by the process sealing sections of ANSI/NFPA 70 (NEC) and CSA 22.1 (CEC). These instruments comply with the North-American installation practice and provide a very safe and cost-saving installation for pressurized applications with hazardous fluids.</p> <p>Further information can be found in the Safety Instructions (XA) of the relevant devices.</p>
<b>Functional Safety</b>	<p>Used for level monitoring (MIN, MAX, range) up to SIL 3 (homogeneous redundancy), independently assessed by TÜV Rheinland as per IEC 61508. Other information see documentation SD00326F: "Functional Safety Manual".</p>
<b>Overfill prevention</b>	<p><b>WHG</b></p> <p>DIBt Z-65.16-501</p>


**Sanitary compatibility**

The following table shows which device versions meet the requirements of 3A-Sanitary Standard No. 74 and are certified by the EHEDG.

FMP53			
Feature	Option	3A	EHEDG
060: Probe	all probes	✓	✓
090: Seal	AD FKM -10 to 150 °C (14 to 302 °F)	✓	✓
	B5 EPDM -20 to 130 °C (-4 to 260 °F)	✓	✓
	C4 Kalrez (FFKM) -20 to 150 °C (-4 to 302 °F)	✓	✓
100: Process Connection	MAJ DIN11864-1 A DN25		✓
	MDJ DIN11864-1 A DN50		✓
	MOJ DIN11851 DN50 PN40		✓
	MQJ DIN11851 DN40 PN40		✓
	TDJ Tri-Clamp ISO2852 DN40-51 (2")	✓	✓
	TFJ Tri-Clamp ISO2852 DN70-76.1 (3")	✓	✓
	TOJ Tri-Clamp ISO2852 DN25-38 (1-1/2")	✓	✓
	TSJ Varivent N tube DN40-162		✓

 Suitable fittings and seals must be used to ensure hygiene-compliant design according to the specifications of 3A and EHEDG.

The maximum admissible temperature for the process connection must be observed.

 The gap-free connections can be cleaned without residue using the usual cleaning methods (CIP and SIP).

**Pharma (CoC)****Certificate of Compliance (CoC)**

- Product structure, feature 590 "Additional Approval", option "LW"
- Materials in contact with process made of 316L with delta-ferrite < 3 %
- Surface roughness  $R_a < 0.38 \mu\text{m}$  (15  $\mu\text{in}$ )
- Information on ASME BPE Conformity

**Telecommunications**

Complies with part 15 of the FCC rules for an unintentional radiator. All probes meet the requirements for a Class A digital device.

In addition, all probes in metallic tanks as well as the coax probe meet the requirements for a Class B digital device.

**Track record**

FMP5x is the upgrade model of the corresponding FMP4x series.



**Test, Certificate**

Feature 580 "Test, Certificate"	Designation	Available for
JA	3.1 Material certificate, wetted metallic parts, EN10204-3.1 inspection certificate	FMP53
JF	Conformity to AD2000, wetted metallic parts: Material of all wetted/pressurized parts conform to AD2000 (Technical rules W2, W9, W10)	FMP53
KB	Surface finish measurement ISO4287/Ra, wetted metallic parts, Inspection certificate	FMP53
KE	Pressure test, internal procedure, inspection certificate	FMP53
KF	3.1 Material certificate + Delta-Ferrit measurement, internal procedure, wetted metallic parts, inspection certificate	FMP53

**Other standards and guidelines**

- EN 60529  
Degrees of protection by housing (IP code)
- EN 61010-1  
Protection Measures for Electrical Equipment for Measurement, Control, Regulation and Laboratory Procedures.
- IEC/EN 61326  
"Emission in accordance with Class A requirements". Electromagnetic compatibility (EMC requirements)
- NAMUR NE 21  
Electromagnetic compatibility (EMC) of industrial process and laboratory control equipment.
- NAMUR NE 43  
Standardization of the signal level for the breakdown information of digital transmitters with analog output signal.
- NAMUR NE 53  
Software of field devices and signal-processing devices with digital electronics
- NAMUR NE 107  
Status classification as per NE107
- NAMUR NE 131  
Requirements for field devices for standard applications
- IEC61508  
Functional safety of electrical/electronic/programmable electronic safety-related systems

## Ordering information

---

### Ordering information

Detailed ordering information is available from the following sources:


- In the Product Configurator on the Endress+Hauser web site: [www.endress.com](http://www.endress.com) → Choose your country → Products → Select measuring technology, software or components → Select product (picklists: measurement method, product family etc.) → Device support (right-hand column): Configure the selected product → The Product Configurator for the selected product is opened.
- From your Endress+Hauser Sales Center: [www.addresses.endress.com](http://www.addresses.endress.com)




#### **Product Configurator - the tool for individual product configuration**

- Up-to-the-minute configuration data
- Depending on the device: Direct input of measuring point-specific information such as measuring range or operating language
- Automatic verification of exclusion criteria
- Automatic creation of the order code and its breakdown in PDF or Excel output format
- Ability to order directly in the Endress+Hauser Online Shop

**3-point linearity protocol**

 The following notes must be taken into account if option F3 ("3 point linearity protocol") has been selected in feature 550 ("Calibration").


Depending on the probe the 3 points of the linearity protocol are defined as follows:

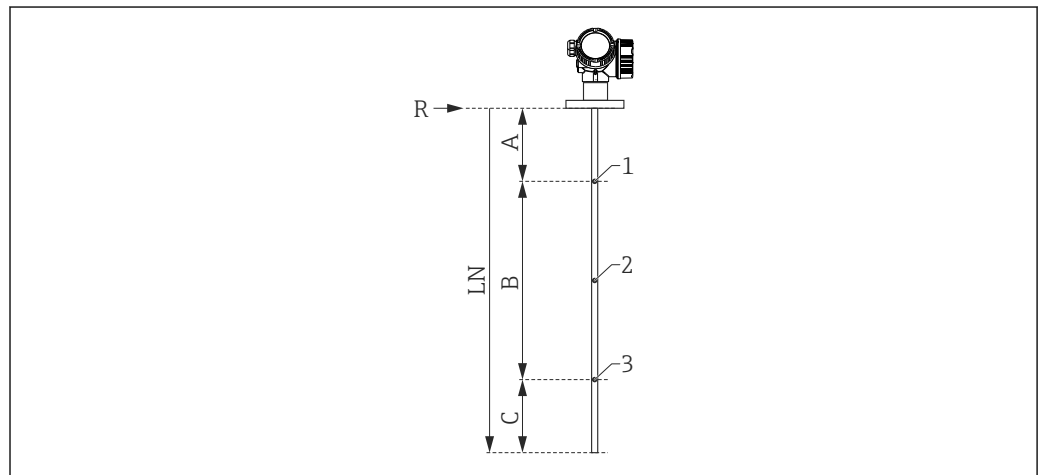

A0021090

- A Distance from reference point R to first measuring point
- B Measuring range
- C Distance from end of probe to third measuring point
- LN Length of probe
- R Reference point of the measurement
- 1 First measuring point
- 2 Second measuring point (centrally between first and third measuring point)
- 3 Third measuring point

Position of 1st measuring point	A = 350 mm (13.8 in)
Position of 2nd measuring point	centrally between 1st and 3rd measuring point
Position of 3rd measuring point	C = 250 mm (9.84 in)
Minimum measuring range	B ≥ 400 mm (15.7 in)
Minimum length of probe	LN ≥ 1 000 mm (39.4 in)

 The position of the measuring points may vary by ±1 cm (±0.04 in).


 The linearity check is performed with the complete device and under reference conditions.

**5-point linearity protocol**

**i** The following notes must be taken into account if option F4 ("5 point linearity protocol") has been selected in feature 550 ("Calibration").

The five points of the linearity protocol are evenly distributed across the measuring range (0% to 100%). In order to define the measuring range, **Empty calibration** (E) and **Full calibration** (F) have to be specified <sup>7)</sup>.

The following restrictions have to be taken into account when defining E and F:

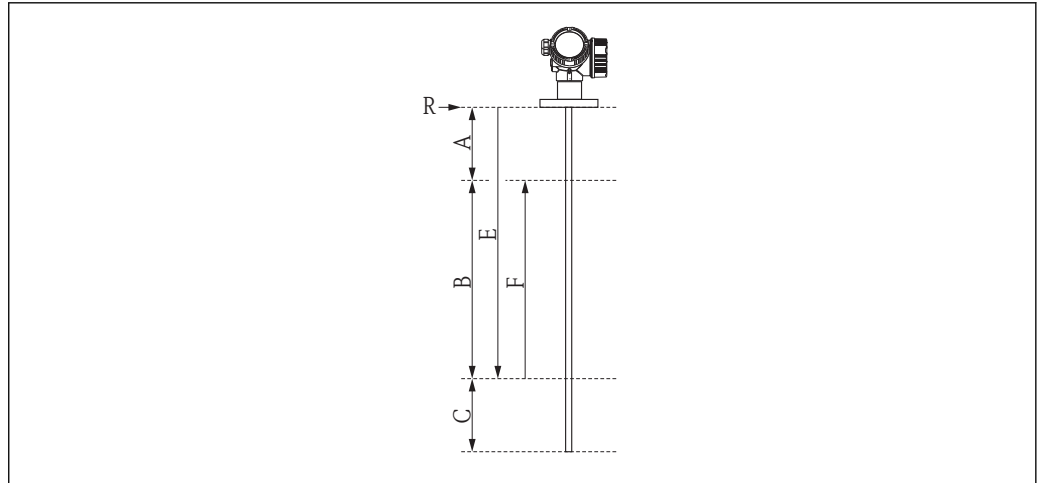

A0015167

Sensor	Minimum distance between reference point (R) and 100% level	Minimum measuring range
FMP53	A ≥ 250 mm (10 in)	B ≥ 400 mm (16 in)

Type of probe	Minimum distance from end of probe to 0% level	Maximum value for "empty calibration"
Rod (not divisible)	C ≥ 100 mm (4 in)	E ≤ 3.9 m (12.8 ft)
Rod (divisible)	C ≥ 100 mm (4 in)	E ≤ 5.9 m (19.4 ft)

**i** The linearity check is performed with the complete device and under reference conditions.

**i** The selected values of **Empty calibration** and **Full calibration** are only used to record the linearity protocol and are reset to their probe specific default values thereafter. If values different from the default are required, they must be ordered as a customized parametrization → 78.



7) If E and F are not specified, probe dependent default values will be used instead.

**Customized parametrization** If the option IJ "Customized parametrization HART", IK "Customized parametrization PA" or IL "Customized parametrization FF" has been selected in feature 570 "Service", customer specific presettings can be selected for the following parameters:

Parameter	Communication	Selection list / range of values
Setup → Distance unit	<ul style="list-style-type: none"> <li>■ HART</li> <li>■ PA</li> <li>■ FF</li> </ul>	<ul style="list-style-type: none"> <li>■ in</li> <li>■ mm</li> </ul>
Setup → Empty calibration	<ul style="list-style-type: none"> <li>■ HART</li> <li>■ PA</li> <li>■ FF</li> </ul>	0 to 6 m (0 to 18 ft)
Setup → Full calibration	<ul style="list-style-type: none"> <li>■ HART</li> <li>■ PA</li> <li>■ FF</li> </ul>	0 to 6 m (0 to 18 ft)
Setup → Adv. Setup → Current output 1/2 → Damping	HART	0 to 999.9 s
Setup → Adv. Setup → Current output 1/2 → Failure mode	HART	<ul style="list-style-type: none"> <li>■ Min</li> <li>■ Max</li> <li>■ Last valid value</li> </ul>
Setup → Adv. Setup → Current output 1/2 → Burst mode	HART	<ul style="list-style-type: none"> <li>■ Off</li> <li>■ On</li> </ul>

## Accessories

Device-specific accessories Weather protection cover

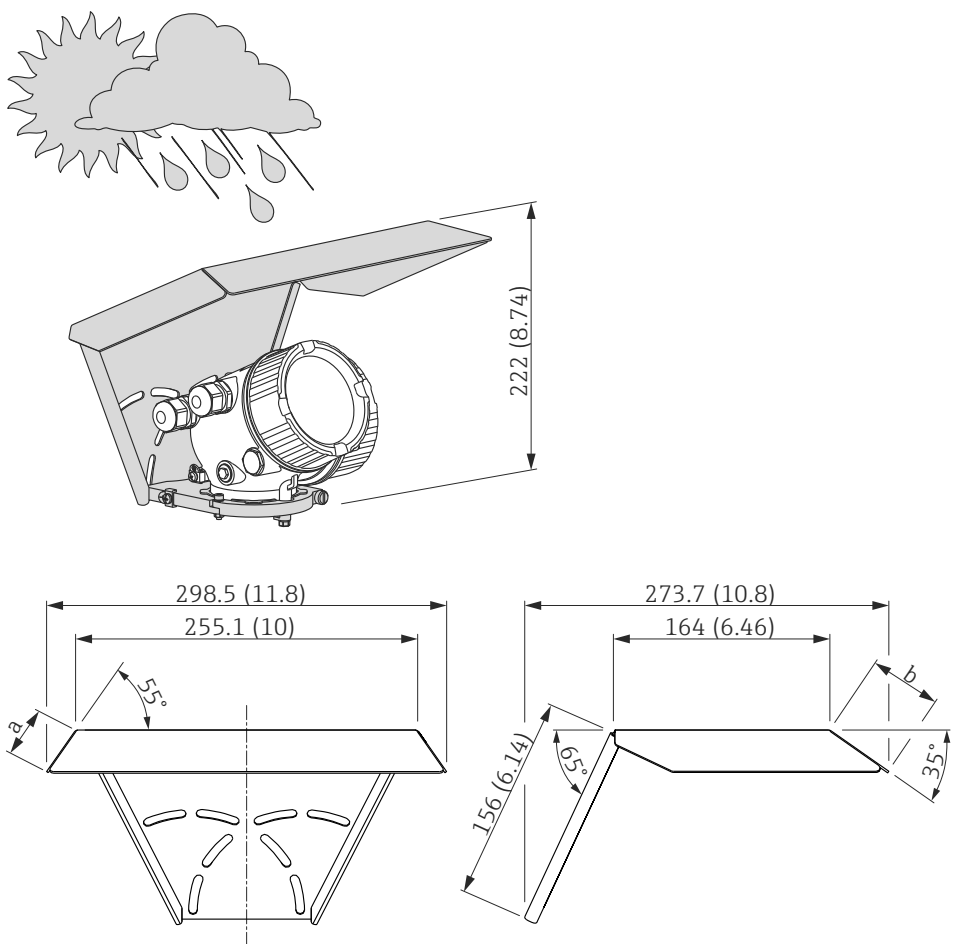Accessory	Description
Weather protection cover	 <p data-bbox="1476 929 1524 952">A0015466</p> <p data-bbox="414 1366 925 1400">☑ 24 Weather protection cover; Dimensions: mm (in)</p> <p data-bbox="414 1411 622 1444">a 37,8 mm (1,5 in)</p> <p data-bbox="414 1444 606 1478">b 54 mm (2,1 in)</p> <p data-bbox="414 1489 1492 1568">  The weather protection cover can be ordered together with the device (product structure, feature 620 "Accessory Enclosed", option PB "Weather Protection Cover"). Alternatively, it can be separately ordered as an accessory; order code 71162242.         </p> <p data-bbox="1476 1344 1524 1366">A0015472</p>

**Mounting bracket for the electronics housing**

Accessory	Description
Mounting bracket for the electronics housing	<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p><b>A</b></p> </div> <div style="text-align: center;"> <p><b>B</b></p> </div> </div> <p> <span style="font-size: small;">■</span> 25 Mounting bracket for the electronics housing; Dimensions: mm (in)                 </p> <p>                     A Wall mounting                      B Pipe mounting                 </p> <p> <span style="font-size: small;">■</span> For the "Sensor remote" device version (see feature O60 of the product structure), the mounting bracket is part of the delivery. If required, it can also be ordered as an accessory (order code 71102216).                 </p> <p style="text-align: right; font-size: x-small;">A0014793</p>

**Weld-in adapter**

Accessory	Description
Weld-in adapter M24 D65	<div style="text-align: center;"> </div> <p style="text-align: right;">mm (inch)</p> <p style="text-align: right; font-size: x-small;">A0013588</p> <p>                     With M24x1.5 thread for flush-mounted sensors.                      Material: 1.4435 (AISI 316L)                      Weight: 0.22 kg (0.48 lbs)                 </p> <p>                     Order No.                     <ul style="list-style-type: none"> <li>■ Standard version: 71041381</li> <li>■ with 3.1 material certificate: 71041383</li> </ul> </p> <p>For details see Operating Instructions BA361F.</p>




**Protective cover**

Accessory	Description
Protective cover	<div data-bbox="767 315 975 461" data-label="Image"> </div> <div data-bbox="1476 468 1528 483" data-label="Text"> <p>A0013589</p> </div> <p data-bbox="767 510 1481 589">With the protective cover the probe can be locked with dismantled electronics. Order no.: 71041379 For details refer to Operating Instructions BA362F.</p>


**Calibration kit**

Accessory	Description
Calibration kit	<p data-bbox="767 759 1506 813">The calibration kit is used to regularly test the accuracy and reproducibility of the Levelflex FMP53 level measurement device.</p> <p data-bbox="767 813 967 840">Order No.: 71041382</p> <p data-bbox="767 840 1254 864">For details refer to Operating Instructions SD01003F.</p>


Remote display FHX50

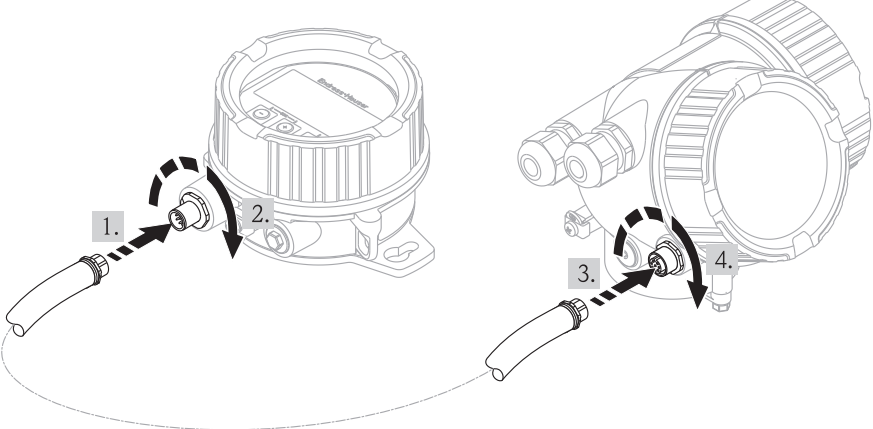
Accessory	Description
Remote display FHX50	<div style="text-align: center;">  </div> <p style="text-align: right; font-size: small;">A0019128</p> <ul style="list-style-type: none"> <li>▪ Material:             <ul style="list-style-type: none"> <li>- Plastics PBT</li> <li>- 316L</li> </ul> </li> <li>▪ Ingress protection: IP68 / NEMA 6P and IP66 / NEMA 4x</li> <li>▪ Suitable for the display modules:             <ul style="list-style-type: none"> <li>- SD02 (push buttons)</li> <li>- SD03 (touch control)</li> </ul> </li> <li>▪ Connection cable:             <ul style="list-style-type: none"> <li>- Cable with M12 plug; supplied with the FHX50; up to 30 m (98 ft)</li> <li>- Customer supplied standard cable; up to 60 m (196 ft)</li> </ul> </li> <li>▪ Ambient temperature: -40 to 80 °C (-40 to 176 °F)</li> </ul> <p> <span style="border: 1px solid black; padding: 2px;">i</span> ▪ If the remote display is to be used, the device must be ordered in the version "Prepared for display FHX50" (feature 030, option L or M). For the FHX50, on the other hand, the option A: "Prepared for display FHX50" has to be selected in feature 050: "Option Measurement Device".         </p> <p> <span style="border: 1px solid black; padding: 2px;">i</span> ▪ If a device has not been ordered in the version "Prepared for display FHX50", but is nevertheless to be equipped with an FHX50, it is essential to select the option B: "Not prepared for display FHX50" in feature 050: "Option Measurement Device" of the FHX50. In this case, a retrofit kit, needed to prepare the device for the remote display, is supplied together with the FHX50.         </p> <p> <span style="border: 1px solid black; padding: 2px;">i</span> For transmitters with approval, application of the FHX50 may be restricted. A device may only be retrofitted with the FHX50 if option L or M ("Prepared for FHX50") is quoted under <i>Basic specifications</i>, position 4 "Display, operation" in the associated Safety Instructions (XA). In addition to this, observe the Safety Instructions (XA) of the FHX50.         </p> <p> <span style="border: 1px solid black; padding: 2px;">i</span> Do not retrofit transmitters with:             <ul style="list-style-type: none"> <li>▪ approval for use in areas with combustible dusts (Dust-Ex approval)</li> <li>▪ type of protection Ex nA</li> </ul> </p> <p> <span style="border: 1px solid black; padding: 2px;">i</span> For details refer to the document SD01007F.         </p>


Overvoltage protection

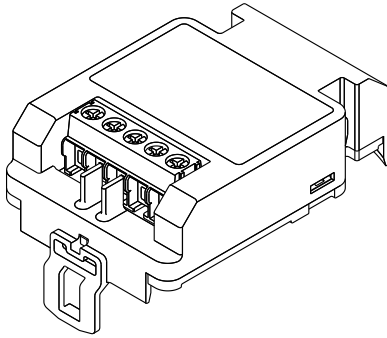
Accessory	Description
<p>Overvoltage protection for 2-wire-devices                      OVP10 (1 channel)                      OVP20 (2 channel)</p>	<div style="text-align: right; font-size: small;">A0021734</div>  <p><b>Technical data</b></p> <ul style="list-style-type: none"> <li>■ Resistance per channel: <math>2 * 0.5 \Omega_{max}</math></li> <li>■ Threshold DC voltage: 400 to 700 V</li> <li>■ Threshold impulse voltage: &lt; 800 V</li> <li>■ Capacitance at 1 MHz: &lt; 1.5 pF</li> <li>■ Nominal arrest impulse voltage (8/20 <math>\mu</math>s): 10 kA</li> <li>■ Suited for wire cross-sections: 0.2 to 2.5 mm<sup>2</sup> (24 to 14 AWG)</li> </ul> <p><b>i</b> <b>Ordering with device</b>                      The overvoltage protection module is preferably ordered with the device. See product structure, feature 610 "Accessory mounted", option NA "Overvoltage protection". Separate ordering of the module is only necessary if a device is to be retrofitted with the overvoltage protection.</p> <p><b>i</b> <b>Order code for retrofitting</b></p> <ul style="list-style-type: none"> <li>■ For 1-channel devices (feature 020, option A)                          OVP10: 71128617</li> <li>■ For 2-channel devices (feature 020, option B, C, E or G)                          OVP20 : 71128619</li> </ul> <p><b>Housing lid for retrofitting</b>                      In order to keep the necessary safety distances, the housing lid needs to be replaced if the device is retrofitted with the overvoltage protection. Depending on the housing type, the order code of the suitable lid is as follows:</p> <ul style="list-style-type: none"> <li>■ GT18 housing: Lid 71185516</li> <li>■ GT19 housing: Lid 71185518</li> <li>■ GT20 housing: Lid 71185516</li> </ul> <p><b>i</b> <b>Restrictions for retrofitting</b>                      Depending on the approval of the transmitter the usage of the OVP module may be restricted. A device may only be retrofitted with an OVP module if the option NA (overvoltage protection) is quoted under <i>Optional Specifications</i> in the Safety Instructions (XA) pertaining to the device.</p> <p><b>i</b> For details refer to SD01090F.</p>


**Communication-specific accessories**


Accessory	Description
Commubox FXA195 HART	For intrinsically safe HART communication with FieldCare via the USB interface.  For details refer to Technical Information TI00404F


Accessory	Description
Commubox FXA291	Connects Endress+Hauser field devices with CDI interface (= Endress+Hauser Common Data Interface) to the USB interface of a computer. Order code: 51516983  For details refer to Technical Information TI00405C


Accessory	Description
HART Loop Converter HMX50	Evaluates the dynamic HART variables and converts them to analog current signals or limit values. Order code: 71063562  For details refer to Technical Information TI00429F and Operating Instructions BA00371F

Accessory	Description
WirelessHART Adapter SWA70	Connects field devices to a WirelessHART network. The WirelessHART adapter can be mounted directly at a HART device and is easily integrated into an existing HART network. It ensures safe data transmission and can be operated in parallel with other wireless networks.  For details refer to Operating Instructions BA00061S


Accessory	Description
Fieldgate FXA320	Gateway for remote monitoring of connected 4-20mA measuring devices via web browser.  For details refer to Technical Information TI00025S and Operating Instructions BA00053S

Accessory	Description
Fieldgate FXA520	Gateway for remote diagnosis and parametrization of connected HART measuring devices via web browser.  For details refer to Technical Information TI00025S and Operating Instructions BA00051S




Accessory	Description
Field Xpert SFX350	Field Xpert SFX350 is a mobile computer for commissioning and maintenance. It enables efficient device configuration and diagnostics for HART and FOUNDATION fieldbus devices in the <b>non-Ex area</b> .  For details, see Operating Instructions BA01202S

Accessory	Description
Field Xpert SFX370	Field Xpert SFX370 is a mobile computer for commissioning and maintenance. It enables efficient device configuration and diagnostics for HART and FOUNDATION fieldbus devices in the <b>non-Ex area</b> and the <b>Ex area</b> .  For details, see Operating Instructions BA01202S


**Service-specific accessories**

Accessory	Description
FieldCare	Endress+Hauser's FDT-based Plant Asset Management tool. Helps to configure and maintain all field devices of your plant. By supplying status information it also supports the diagnosis of the devices.  For details refer to Operating Instructions BA00027S and BA00059S.

**System components**

Accessory	Description
Graphic Data Manager Memograph M	The graphic data manager Memograph M provides information on all the relevant process variables. Measured values are recorded correctly, limit values are monitored and measuring points analyzed. The data are stored in the 256 MB internal memory and also on an SD card or USB stick.  For details refer to Technical Information TI00133R and Operating Instructions BA00247R
RN221N	Active barrier with power supply for safe separation of 4 to 20 mA current circuits. Provides bi-directional HART transmission.  For details refer to Technical Information TI00073R and Operating Instructions BA00202R
RNS221	Transmitter supply for 2-wire sensors or transmitters exclusively for non-Ex areas. Provides bi-directional communication using the HART communication sockets.  For details refer to Technical Information TI00081R and Operating Instructions KA00110R

## Documentation

-  For an overview of the scope of the associated Technical Documentation, refer to the following:
- The *W@M Device Viewer* : Enter the serial number from the nameplate ([www.endress.com/deviceviewer](http://www.endress.com/deviceviewer))
  - The *Endress+Hauser Operations App*: Enter the serial number from the nameplate or scan the 2-D matrix code (QR code) on the nameplate.

### Standard documentation

#### Levelflex FMP53

*Correlation of documentations to the device:*

Device	Power supply, output	Communication	Document type	Document code
FMP53	A, B, C, K, L	HART	Technical Information	TI01002F
			Operating Instructions	BA01002F
			Brief Operating Instructions	KA01078F
			Description of Device Parameters	GP01000F
	G	PROFIBUS PA	Technical Information	TI01002F
			Operating Instructions	BA01007F
			Brief Operating Instructions	KA01080F
			Description of Device Parameters	GP01001F
	E	FOUNDATION Fieldbus	Technical Information	TI01002F
			Operating Instructions	BA01053F
			Brief Operating Instructions	KA01108F
			Description of Device Parameters	GP01015F

### Supplementary documentation

Device	Document type	Document code
Fieldgate FXA520	Technical Information	TI369F
Tank Side Monitor NRF590	Technical Information	TI402F
	Operating Instructions	BA256F
	Description of Device Parameters	BA257F

Description	Document type	Document code
<b>Continuous level measurement in liquids and bulk solids</b> Selection and engineering guide for the process industry	Competence brochure	CP00023F

**Safety documentation**

**Safety Instructions (XA)**

Depending on the approval, the following Safety Instructions (XA) are supplied with the device. They are an integral part of the Operating Instructions.

Feature 010	Approval	Available for	Feature 020: "Power Supply; Output"				
			A <sup>1)</sup>	B <sup>2)</sup>	C <sup>3)</sup>	E <sup>4)/G<sup>5)</sup></sup>	K <sup>6)/L<sup>7)</sup></sup>
BA	ATEX II 1G Ex ia IIC T6 Ga	FMP53	XA00496F	XA01125F	XA01126F	XA00516F	-
BB	ATEX II 1/2G Ex ia IIC T6 Ga/Gb	FMP53	XA00496F	XA01125F	XA01126F	XA00516F	-
BC	ATEX II 1/2G Ex d ia  IIC T6 Ga/Gb	FMP53	XA00499F	XA00499F	XA00499F	XA00519F	XA01133F
BD	ATEX II 1/3G Ex ic ia  IIC T6 Ga/Gc	FMP53	XA00497F	XA01127F	XA01128F	XA00517F	-
BG	ATEX II 3G Ex nA IIC T6 Gc	FMP53	XA00498F	XA01130F	XA01131F	XA00518F	XA01132F
BH	ATEX II 3G Ex ic IIC T6 Gc	FMP53	XA00498F	XA01130F	XA01131F	XA00518F	-
BL	ATEX II 1/3G Ex nA ia  IIC T6 Ga/Gc	FMP53	XA00497F	XA01127F	XA01128F	XA00517F	XA01129F
B2	ATEX II 1/2G Ex ia IIC T6 Ga/Gb, 1/2D Ex ia IIIC Da/Db	FMP53	XA00502F	XA00502F	XA00502F	XA00522F	-
B3	ATEX II 1/2G Ex d ia  IIC T6 Ga/Gb, 1/2 D Ex t IIIC Da/Db	FMP53	XA00503F	XA00503F	XA00503F	XA00523F	XA01136F
B4	ATEX II 1/2G Ex ia IIC T6 Ga/Gb, Ex d ia  IIC T6 Ga/Gb	FMP53	XA00500F	XA01134F	XA01135F	XA00520F	-
C2	CSA C/US IS Cl.I,II,III Div.1 Gr.A-G, NI Cl.1 Div.2, Ex ia	FMP53	XA00530F	XA00530F	XA00530F	XA00571F	XA00530F
C3	CSA C/US XP Cl.I,II,III Div.1 Gr.A-G, NI Cl.1 Div.2, Ex d	FMP53	XA00529F	XA00529F	XA00529F	XA00570F	XA00529F
FB	FM IS Cl.I,II,III Div.1 Gr.A-G, AEx ia, NI Cl.1 Div.2	FMP53	XA00531F	XA00531F	XA00531F	XA00573F	XA00531F
FD	FM XP Cl.I,II,III Div.1 Gr.A-G, AEx d, NI Cl.1 Div.2	FMP53	XA00532F	XA00532F	XA00532F	XA00572F	XA00532F
IA	IEC Ex ia IIC T6 Ga	FMP53	XA00496F	XA01125F	XA01126F	XA00516F	-
IB	IEC Ex ia IIC T6 Ga/Gb	FMP53	XA00496F	XA01125F	XA01126F	XA00516F	-
IC	IEC Ex d ia  IIC T6 Ga/Gb	FMP53	XA00499F	XA00499F	XA00499F	XA00519F	XA01133F
ID	IEC Ex ic ia  IIC T6 Ga/Gc	FMP53	XA00497F	XA01127F	XA01128F	XA00517F	-
IG	IEC Ex nA IIC T6 Gc	FMP53	XA00498F	XA01130F	XA01131F	XA00518F	XA01132F
IH	IEC Ex ic IIC T6 Gc	FMP53	XA00498F	XA01130F	XA01131F	XA00518F	-
IL	IEC Ex nA ia  IIC T6 Ga/Gc	FMP53	XA00497F	XA01127F	XA01128F	XA00517F	XA01129F
I2	IEC Ex ia IIC T6 Ga/Gb, Ex ia IIIC Da/Db	FMP53	XA00502F	XA00502F	XA00502F	XA00522F	-
I3	IEC Ex d  ia  IIC T6 Ga/Gb, Ex t IIIC Da/Db	FMP53	XA00503F	XA00503F	XA00503F	XA00523F	XA01136F
KA	KC Ex ia IIC T6 Ga	FMP53	XA01169F	-	XA01169F	-	-
KB	KC Ex ia IIC T6 Ga/Gb	FMP53	XA01169F	-	XA01169F	-	-
KC	KC Ex d ia  IIC T6	FMP53	-	-	XA01170F	-	-
MA	INMETRO Ex ia IIC T6 Ga	FMP53	XA01038F	XA01038F	XA01038F	-	XA01038F
MC	INMETRO Ex d ia  IIC T6 Ga/Gb	FMP53	XA01041F	XA01041F	XA01041F	-	XA01041F
MH	INMETRO Ex ic IIC T6 Gc	FMP53	XA01040F	XA01040F	XA01040F	-	XA01040F
NA	NEPSI Ex ia IIC T6 Ga	FMP53	XA00634F	XA00634F	XA00634F	XA00640F	XA00634F
NB	NEPSI Ex ia IIC T6 Ga/Gb	FMP53	XA00634F	XA00634F	XA00634F	XA00640F	XA00634F
NC	NEPSI Ex d ia  IIC T6 Ga/Gb	FMP53	XA00636F	XA00636F	XA00636F	XA00642F	XA00636F
NG	NEPSI Ex nA II T6 Gc	FMP53	XA00635F	XA00635F	XA00635F	XA00641F	XA00635F
NH	NEPSI Ex ic IIC T6 Gc	FMP53	XA00635F	XA00635F	XA00635F	XA00641F	XA00635F
N2	NEPSI Ex ia IIC T6 Ga/Gb, Ex iaD 20/21 T85...90°C	FMP53	XA00638F	XA00638F	XA00638F	XA00644F	XA00638F

Feature 010	Approval	Available for	Feature 020: "Power Supply; Output"				
			A <sup>1)</sup>	B <sup>2)</sup>	C <sup>3)</sup>	E <sup>4)</sup> /G <sup>5)</sup>	K <sup>6)</sup> /L <sup>7)</sup>
N3	NEPSI Ex d[ia] IIC T6 Ga/Gb, DIP A20/21 T85...90°C IP66	FMP53	XA00639F	XA00639F	XA00639F	XA00645F	XA00639F
8A	FM/CSA IS+XP Cl.I,II,III Div.1 Gr.A-G	FMP53	XA00531F	XA00531F	XA00531F	XA00572F	XA00531F
			XA00532F	XA00532F	XA00532F	XA00573F	XA00532F

- 1) A: 2-wire; 4-20mA HART
- 2) B: 2-wire; 4-20mA HART, switch output
- 3) C: 2-wire; 4-20mA HART, 4-20mA
- 4) E: 2-wire; FOUNDATION Fieldbus, switch output
- 5) G: 2-wire; PROFIBUS PA, switch output
- 6) K: 4-wire 90-253VAC; 4-20mA HART
- 7) L: 4-wire 10,4-48VDC; 4-20mA HART

 For certified devices the relevant Safety Instructions (XA) are indicated on the nameplate.



*Ex-marking in case of connected FHX50 remote display*

If the device is prepared for the remote display FHX50 (product structure: feature 030: Display, Operation", option L or M), the Ex marking of some certificates changes according to the following table<sup>8)</sup>:

Feature 010 ("Approval")	Feature 030 ("Display, Operation")	Ex-marking
BG	L or M	ATEX II 3G Ex nA [ia Ga] IIC T6 Gc
BH	L or M	ATEX II 3G Ex ic [ia Ga] IIC T6 Gc
B3	L or M	ATEX II 1/2G Ex d [ia] IIC T6 Ga/Gb, ATEX II 1/2D Ex ta [ia Db] IIIC Txx°C Da/Db
IG	L or M	IECEX Ex nA [ia Ga] IIC T6 Gc
IH	L or M	IECEX Ex ic [ia Ga] IIC T6 Gc
I3	L or M	IECEX Ex d [ia] IIC T6 Ga/Gb, IECEX Ex ta [ia Db] IIIC Txx°C Da/Db

---

8) The marking of certificates not mentioned in this table are not affected by the FHX50.

## Registered trademarks

**HART®**

Registered trademark of the HART Communication Foundation, Austin, USA

**PROFIBUS®**

Registered trademark of the PROFIBUS User Organization, Karlsruhe, Germany

**FOUNDATION™ Fieldbus**

Registered trademark of the Fieldbus Foundation, Austin, Texas, USA

**KALREZ®, VITON®**

Registered trademark of DuPont Performance Elastomers L.L.C., Wilmington, USA

**TEFLON®**

Registered trademark of E.I. DuPont de Nemours & Co., Wilmington, USA

**TRI CLAMP®**

Registered trademark of Alfa Laval Inc., Kenosha, USA

## Patents

This product may be protected by at least one of the following patents.

Further patents are pending.

US Patents	EP Patents
5.827.985	---
5.884.231	---
5.973.637	---
6.087.978	955 527
6.140.940	---
6.481.276	---
6.512.358	1 301 914
6.559.657	1 020 735
6.640.628	---
6.691.570	---
6.847.214	---
7.441.454	---
7.477.059	---
---	1 389 337
7.965.087	---



71282394

[www.addresses.endress.com](http://www.addresses.endress.com)

---