

# 2300 Vibration Monitors

## Product Datasheet

Bently Nevada\* Asset Condition Monitoring



### Description

The 2300 Vibration Monitors provide cost-effective continuous vibration monitoring and protection capabilities for less critical and spared machinery. They are specifically designed to continuously monitor and protect essential medium to low criticality machinery in a wide range of industries including: oil & gas, power generation, water treatment, pulp and paper, manufacturing, mining, cement, and other industries.

The 2300 Vibration Monitors deliver vibration monitoring and high vibration level alarming. They include two channels of seismic or proximity measurement inputs from various accelerometer, Velomitor and Proximitor types, a speed input channel for time-synchronous measurements, and outputs for relay contacts. The 2300/20 monitor features a configurable 4-20 mA output which interfaces more points to a DCS. The 2300/25 monitor features System 1\* connectivity for Trendmaster SPA interface which enables users to leverage existing DSM SPA infrastructure.

The 2300 Vibration Monitors are designed for use on a broad range of machine trains or individual casings where the sensor point count fits the monitor's channel count and where advanced signal processing is desired.



# Monitor Key Features

## 2300/20

- Two 4-20mA outputs with internal current loop power supply.
- Continuous monitoring and protection
- Two acceleration/velocity/proximity inputs with synchronized sampling for advanced diagnostics.
- One dedicated speed channel supporting Proximity probes, Magnetic pickup and Proximity switch type sensors.
- Supports process variable on all three input channels.
- Key measurements (Acceleration pk, Acceleration rms, Acceleration pk/rms, Velocity pk, Velocity rms, Displacement pp, Displacement rms, Speed) real-time provided with alarm configuration.
- Each channel has one measurement group and two bandpass measurements.
- LCD and LED for real time value and status display.
- Ethernet 10/100 Base-T communication for configuration using Bently Nevada Monitor Configuration software (Included) with RSA encryption.
- Local contacts for positive engagement of channel bypass, configuration lockout, and reset.
- Two relay outputs with programmable setpoints.
- Three buffered transducer outputs (including Keyphasor\* signal) providing short circuit and EMI protection. Buffered outputs for each signal are through BNC connectors.
- Modbus® over Ethernet.



**CAUTION:** Two 4-20 mA outputs will **NOT** work with external powered loop.

## 2300/25

- Trendmaster SPA interface.
- Continuous monitoring and protection.
- Two Acceleration/Velocity/Proximity inputs with synchronized sampling for advanced diagnostics.
- One dedicated speed channel supporting Proximity probes, Magnetic pickup and Proximity switch type sensor.
- Support process variable on all three input channels.
- Key measurements (Acceleration pk, Acceleration rms, Acceleration pk/rms, Velocity pk, Velocity rms, Displacement pp, Displacement rms, Speed) real-time provided with alarm configuration.

- Each channel has one measurement group and two bandpass measurements.
- LCD and LED for real time value and status display.
- Ethernet 10/100 Base-T communication for configuration using Bently Nevada Monitor Configuration software (included) with RSA encryption.
- Local contacts for positive engagement of channel bypass, configuration lockout, and reset.
- Two relay outputs with programmable setpoints.
- Three buffered transducer outputs (including Keyphasor signal) providing short circuit and EMI protection. Buffered outputs for each signal are through BNC connectors.
- Modbus® over Ethernet.

# Specifications

## INPUTS

POWER INPUT	
DC Input	18~36VDC, max 7.5W
CHANNEL TYPES	
ICP Accelerometers	
Configurable Bandpass filter:	0.2 Hz to 20 kHz
Scale Factor range	5 to 1000 mV/g
Full scale range	2 to 80 g peak
Current Sink Source	3.3 mA $\pm$ 5%
Open Circuit Voltage	-21 to -24 VDC
Velocity	
Configurable Bandpass filter	0.2 Hz to 20 kHz
Scale Factor range	5 to 1000 mV/in/s
Full scale range	0 to 50 in/s peak
Radial Vibration	
Configurable Bandpass filter	0.2 Hz to 20 kHz
Scale Factor range	5 to 1000 mV/mil
Full scale range	0 to 160 mil peak-peak
Thrust Channel	
Scale Factor range	5 to 1000 mV/mil
Process Variable Channel	
Support most of unit with default on Temperature	
Channel Hardware Specification	
Configurable Upper OK limit	-0.25 to -22 V (greater than lowerOK)
Configurable Lower OK limit	-0.25 to -22 V (less than upperOK)
Accuracy: $\pm$ 1% of full scale range	
Independent 24-bit ADCs on input channels	
Supports Bently transducer or 2/3 wires custom transducer for Accelerometers, Velomitor and Proximitor.	
Speed/Keyphasor	
Keyphasor transducers support multiple events per	

revolution and event ratios for speed inputs up to 20 kHz.

Threshold voltage resolution	0.1VDC
------------------------------	--------

### Proximity Transducer Interface

Supply Voltage	-22.8 to -25.2 VDC
Maximum Rated Current	15 mA
Short Circuit Current	15.1 mA to 23.6 mA
Accuracy	$\pm$ 1% of full scale range
Input Impedance	3-wire Voltage Mode, 10 k $\Omega$
Rpm range	1 to 120,000

### Proximity Switch Interface

Supply Voltage	-10 to -24 VDC
Lower Not Ok limit	-2.75 $\pm$ 0.05 V
Rpm range	1 to 60,000

### Magnetic Pick up

Input voltage	up to $\pm$ 125V (250Vp-p)
Rpm range	200 to 120,000

### Contact Inputs

Monitor provides 3 contact capabilities with input terminals	Configuration lock Latched alarm/relay reset function Monitor Alarm/Relay Inhibit
Activate	0 to 10 k $\Omega$
De-activate	150 k $\Omega$ to infinite

### Button Inputs

External button to reset latched alarm and relay

One buried button provides 3 functions	<ul style="list-style-type: none"><li>• Display monitor information</li><li>• LCD contrast adjustment</li><li>• Reset settings to default</li></ul>
--	---

### Display Monitor Information

Reset listed settings to <b>Default</b>	<ul style="list-style-type: none"><li>• User account name</li><li>• IP Address</li><li>• FW/HW version</li></ul>
---	--

### Jumper between COM & Chassis GND

Jumpers are 2-pin terminal interfaces that connects COM to the Chassis ground (GND).

Alternatively, COM can be connected to an earth ground separately through a terminal.

## OUTPUTS

### Buffered Output

Three buffered outputs are available on the monitor through BNC connectors	2 Vibration Outputs 1 Speed Output
--	---------------------------------------

### Relay

Relays provide two dry-contact outputs	May be normally energized or de-energized  No output feedback determination
--	---

### Relay circuit specification in Non-Hazardous area:

Type	Single pole, double throw
Sealing	Epoxy sealed
Contact life	100,000 cycles @ 5 amps 250 VAC  200,000 @ 1 amp, 24 VDC
Insulation resistance	1000 MΩ minimum @ 500 VDC
Relay closed contact resistance	1 Ω maximum
Relay open contact resistance	1 MΩ minimum
Maximum switched contact voltage	250V AC / 250V DC
Maximum breaking contact current	6A @250VAC / 6A @24VDC
Maximum switched power	1500VA AC / 150 Watts DC

### Relay circuit specification in Hazardous area:

Maximum switched contact voltage and current	6A @24VAC / 5A @30VAC / 5.8A @24VDC / 4A @30VDC
--	--

### 4-20mA Output (2300/20)

Two 4-20mA outputs with internal current loop power supply  
4 to 20mA output values are proportional to the full-scale of the associated measurement.

Software configuration may determine the variable of each output.  
Voltage compliance: 0 to +12Vdc range across load

Load resistance: 0 to 600Ω  
Resolution: 0.3662uA

Accuracy: 1% over operating temperature range  
Update rate: 100ms

Configurable with default 2mA clamp current  
No output feedback determination



**CAUTION:** Two 4-20 mA outputs will **NOT** work with external powered loop.

### SPA Output (2300/25)

Input signal range	High AC: 8Vpp Low AC: 1.6Vpp DC GAP: 0 to -20Vdc (max measurable AC signal is 1Vpp).
Accuracy	High/Low AC: ±1% of Full-Scale at 100Hz DC GAP: ±0.5V (measurable AC accuracy: ±20mV)
Frequency response	10Hz to 3000Hz ±5%

### LEDs

OK	Indicates when the monitor is operating properly.
Protection fault	Indicates hardware fault that is impacting alarm determination.
User inhibit	Indicates the alarm/relays have been intentionally inhibited from operation.
Bypass	Indicates user initiated bypass action.
Relay status	Indicates if relays have been activated.
TX/RX	Indicates the Ethernet status and monitor communicating with remote software.
SPEED/AUX channel status	Indicates the speed channel has valid speed signal input OR operating correctly when AUX.
Channel Alarm Status	Alert LED: engages if any channel is in alert state .  Danger LED: engages if any channel is in danger state.

## LCD Display

Allows viewing machine speed, vibration measurements value, setpoints, and configuration information.

## COMMUNICATIONS

<b>Ethernet</b>	Ethernet, 10Base-T and 100Base-TX. Conforms to IEEE802.3 RJ-45 for 10Base-T/100Base-TX Ethernet cabling Cable length: 100 meters (328 ft.) maximum
-----------------	---

## ENVIRONMENTAL LIMITS

Operating Temperature	-30 °C to +65 °C (-22 °F to +149 °F)
Storage Temperature	-40 °C to +85 °C (-40 °F to +185 °F)
Humidity	Up to 95%, non-condensing
Vibration Limitation	3g
Battery Life for Real Time Clock	Powered: 38 years @ 50°C (122 °F) Un-powered: 12 years @ 50°C (122 °F)

## COMPLIANCE AND CERTIFICATIONS

### General and Electrical Safety

UL Std. No. 61010 (3rd Edition)

CAN/CSA C22.2 No. 61010-1-12

### 2014/35/EU Low Voltage

EN61010-1: 2010

### European Community Directives

LV Directive 2014/35/EU

### EMC

EN61000-6-2 Immunity for Industrial Environments

EN61000-6-4 Emissions for Industrial Environments

EN61326-1 Electrical equipment for measurement, control and laboratory use - EMC requirements

## HAZARDOUS AREA APPROVAL

For a detailed listing of country and product specific approvals, refer to the Approvals Quick Reference Guide (document 108M1756) located at the following website:

[www.GEmeasurement.com](http://www.GEmeasurement.com)

## CSA/NRTL/C

Class I, Division 2/Zone 2

AEx nA nC [ic] IIC T4 Gc

Class I, Division 2, Groups A,B,C & D; T4

## ATEX/IECEX

### 2300/20



II 3G

Ex nA nC [ic] IIC T4 Gc

T4@ -30°C ≤ Ta ≤ 65°C (-22°F ≤ +149°F)

### 2300/25



II 3G

Ex nA nC ic [ic] IIC T4 Gc

T4@ -30°C ≤ Ta ≤ 65°C (-22°F ≤ +149°F)

## Intrinsic Safety Parameters

Proximator Transducer	Uo: 24V; Io: 46mA; Co: 200nF; Lo: 1mH
Accelerometer Transducer	Uo: 24V; Io: 3.3mA; Co: 200nF; Lo: 1mH
SPA POWER (2300/25 Only)	Ui=15V; Ii=150mA; Pi=560mW; Ci=0; Li=0
SPA SIGNAL (2300/25 Only)	Ui=12V; Ii=12mA; Pi=36mW; Ci=0; Li=0

## PHYSICAL

Dimensions (Width x Depth x Height)	127mm x 127mm x 76.2mm (5in x 5in x 3in)
Weight	1.03kg (2.26lbs)
Mounting	Panel mount or DIN rail (adapter included)

# Ordering Information



For a detailed listing of country and product specific approvals, refer to the Approvals Quick Reference Guide (document 108M1756) located at the following website:  
[www.GEmeasurement.com](http://www.GEmeasurement.com).

## 2300 Series Vibration Monitor

**2300/20-AA: Monitor with 4-20ma Outputs**  
(including DIN rail mount assembly, manual and monitor configuration software)

### AA: Approvals Option

00 None

02 Multiple Explosive Atmosphere Certifications (ATEX/IECEX/CSA)

**2300/25-AA: Monitor with SPA Outputs**  
(including DIN rail mount assembly, manual and monitor configuration software)

### AA: Approvals Option

00 None

02 Multiple Explosive Atmosphere Certifications (ATEX/IECEX/CSA)

**2300/20\_KIT-AAA-BB: Bently Nevada 2300/20 Condition Monitoring System Kit**

### AAA: Configuration

#### 001 2 Sensors and 1 Housing

- 1 - 2300/20 Monitor
- 1 - 6 ft. (1.8 m) shielded Ethernet cable
- 1 - Housing Kit: 105M6193-01 (fiberglass housing for nonhazardous area) or 105M6193-02 (stainless steel housing for hazardous area) 12 x 14 in.
- 2 - Accelerometer sensors (200350)
- 2 - 17 ft. (5.2 m) cables (9571)

(Excluding Keyphasor sensor and 24 VDC power supply 1)

#### 002 1 Sensor and 1 Housing

- 1 - 2300/20 or 2300/25 Monitor
- 1 - 6 ft. (1.8 m) shielded Ethernet cable
- 1 - Housing Kit: 105M6193-01 (fiberglass housing for nonhazardous area) or 105M6193-02 (stainless steel housing for hazardous area) 12 x 14 in.
- 1 - Accelerometer sensor (200350)
- 1 - 17 ft. (5.2 m) cable (9571)

(Excluding Keyphasor sensor and 24VDC power supply1)

#### 003 2 Sensors

- 1 - 2300/20 Monitor
- 1 - 6 ft. (1.8 m) shielded Ethernet cable
- 2 - Accelerometer sensors (200350)
- 2 - 12 ft. (3.6m) cables (9571)

(Excluding Keyphasor sensor and 24VDC power supply1)

#### 004 2 Velomiters and 1 Housing

- 1 - 2300/20 Monitor
- 1 - 6 ft. (1.8 m) shielded Ethernet cable
- 1 - Housing Kit: 105M6193-01 (fiberglass housing for nonhazardous area) or 105M6193-02 (stainless steel housing for hazardous area) 12 x 14 in.
- 2 - Velomitor sensors (330500)
- 2 - 17 ft. (5.2 m) cable (9571)

(Excluding Keyphasor sensor and 24VDC power supply1)

#### 005 1 Velomitor and 1 Housing

- 1 - 2300/20 Monitor
- 1 - 6 ft. (1.8 m) shielded Ethernet cable
- 1 - Housing Kit: 105M6193-01 (fiberglass housing for nonhazardous area) or 105M6193-02 (stainless steel housing for hazardous area) 12 x 14 in.
- 1 - Velomitor sensor (330500)
- 1 - 17 ft. (5.2 m) cable (9571)

(Excluding Keyphasor sensor and 24VDC power supply1)

#### **006 2 Velomitors**

- 1 - 2300/20 Monitor
- 1 - 6 ft. (1.8 m) shielded Ethernet cable
- 2 - Velomitor sensors (330500)
- 2 - 12 ft. (3.6 m) cable (9571)

(Excluding Keyphasor sensor and 24VDC power supply1)

### **BB: Approvals Option**

**00** None

**02** Multiple Explosive Atmosphere Certifications (ATEX/IECEX/CSA)

### **2300/25\_KIT-AAA-BB: Bently Nevada 2300/25 Condition Monitoring System Kit**

#### **AAA: Configuration**

##### **001 2 Sensors and 1 Housing**

- 1 - 2300/25 Monitor
- 1 - 6 ft. (1.8 m) shielded Ethernet cable
- 1 - Housing Kit: 105M6193-01 (fiberglass housing for nonhazardous area) or 105M6193-02 (stainless steel housing for hazardous area) 12 x 14 in.
- 2 - Accelerometer sensors (200350)
- 2 - 17 ft. (5.2 m) cables (9571)

(Excluding Keyphasor sensor and 24 VDC power supply 1)

##### **002 1 Sensor and 1 Housing**

- 1 - 2300/25 Monitor
- 1 - 6 ft. (1.8 m) shielded Ethernet cable
- 1 - Housing Kit: 105M6193-01 (fiberglass housing for nonhazardous area) or 105M6193-02 (stainless steel housing for hazardous area) 12 x 14 in.
- 1 - Accelerometer sensor (200350)
- 1 - 17 ft. (5.2 m) cable (9571)

(Excluding Keyphasor sensor and 24VDC power supply1)

#### **003 2 Sensors**

- 1 - 2300/25 Monitor
- 1 - 6 ft. (1.8 m) shielded Ethernet cable
- 2 - Accelerometer sensors (200350)
- 2 - 12 ft. (3.6m) cables (9571)

(Excluding Keyphasor sensor and 24VDC power supply1)

##### **004 2 Velomitors and 1 Housing**

- 1 - 2300/25 Monitor
- 1 - 6 ft. (1.8 m) shielded Ethernet cable
- 1 - Housing Kit: 105M6193-01 (fiberglass housing for nonhazardous area) or 105M6193-02 (stainless steel housing for hazardous area) 12 x 14 in.
- 2 - Velomitor sensors (330500)
- 2 - 17 ft. (5.2 m) cable (9571)

(Excluding Keyphasor sensor and 24VDC power supply1)

##### **005 1 Velomitor and 1 Housing**

- 1 - 2300/25 Monitor
- 1 - 6 ft. (1.8 m) shielded Ethernet cable
- 1 - Housing Kit: 105M6193-01 (fiberglass housing for nonhazardous area) or 105M6193-02 (stainless steel housing for hazardous area) 12 x 14 in.
- 1 - Velomitor sensor (330500)
- 1 - 17 ft. (5.2 m) cable (9571)

(Excluding Keyphasor sensor and 24VDC power supply1)

##### **006 2 Velomitors**

- 1 - 2300/25 Monitor
- 1 - 6 ft. (1.8 m) shielded Ethernet cable
- 2 - Velomitor sensors (330500)
- 2 - 12 ft. (3.6 m) cable (9571)

(Excluding Keyphasor sensor and 24VDC power supply1)

**BB: Approvals Option**

- 00 None
- 02 Multiple Explosive Atmosphere Certifications (ATEX/IECEX/CSA)

**System 1:**

2300/20 can interface to System 1 V16.2 or higher for expanded condition monitoring and analysis. System 1 software and the 2300 device connectivity (P/N 3071/13) are sold separately. Refer to document 108M5214 for System 1 detailed information.

**3071/13-AA-BB:** System 1 2300 Series Device Import

**AA:** Not available for 2300 monitor

00

**BB:** Quantity of 2300 Monitoring Systems


## - Numeric [1->n]

<sup>1</sup>Provided are 3 kinds of power supplies with different temperature and power ranges. Verify Accessories below for the details.

**Accessories**


- 106M7607-01 Power supply for DIN rail mounting, 100/240AC to 24DC/1.5ACertifications (ATEX) (-25°C ~70°C, 35\*99\*95 mm) (One power can drive max 4 monitors)
- 110M7102-01 Power supply for DIN rail mounting, 100/240AC to 24DC/1.3ACertifications (CID2 by UL) (-25°C ~70°C, 22.5\*99\*107 mm) (One power can drive max 4 monitors.)
- 106M6694-01 Power supply for DIN rail mounting, 110/220AC to 24VDC/5ACertifications (ATEX, IECEX, CID2 by UL) (-40°C ~70°C, 40\*130\*125 mm) (One power can drive max 10 monitors.)

- 105M6193-02 Stainless Steel Housing for 2300 KIT (can be used in hazardous area)
  - 105M6193-01 Fiberglass NEMA 4X/IP66 weatherproof housing with window in door (includes mounting plate for monitor)
- Dimensions:**  
Width: 338.3 mm (13.3 in)  
Height: 389.1 mm (15.3 in)  
Depth: 209.8 mm (8.2 in)
- (used in nonhazardous area)

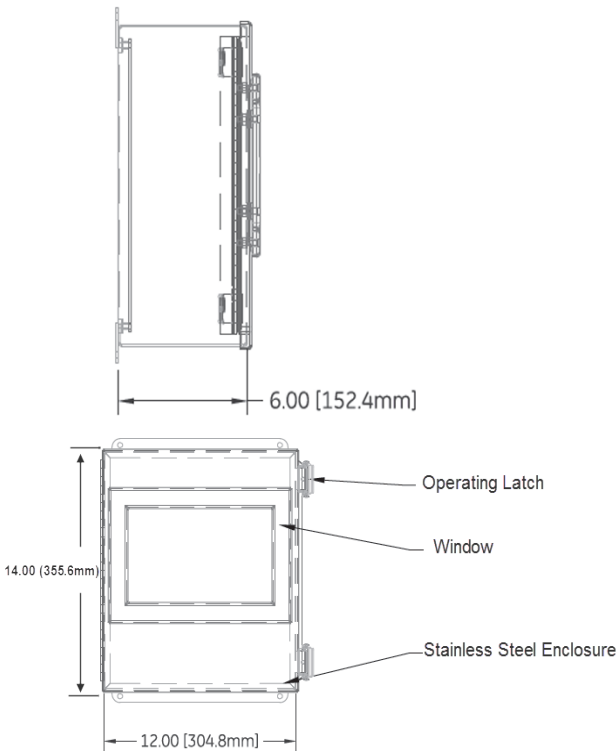


**105M6193-02 Weatherproof Housing**




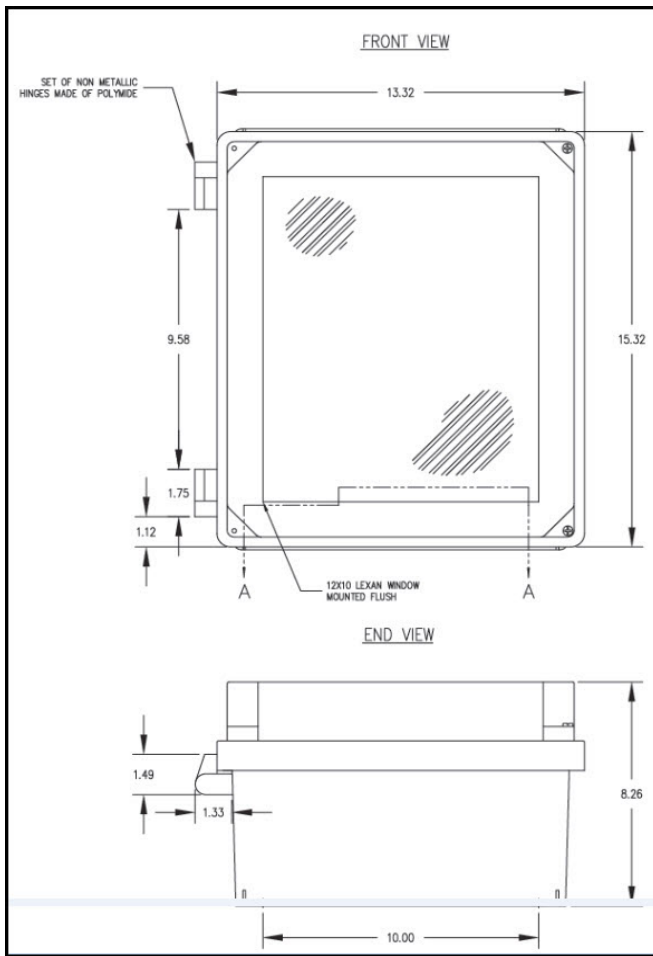


105M6193-01 Weatherproof Housing

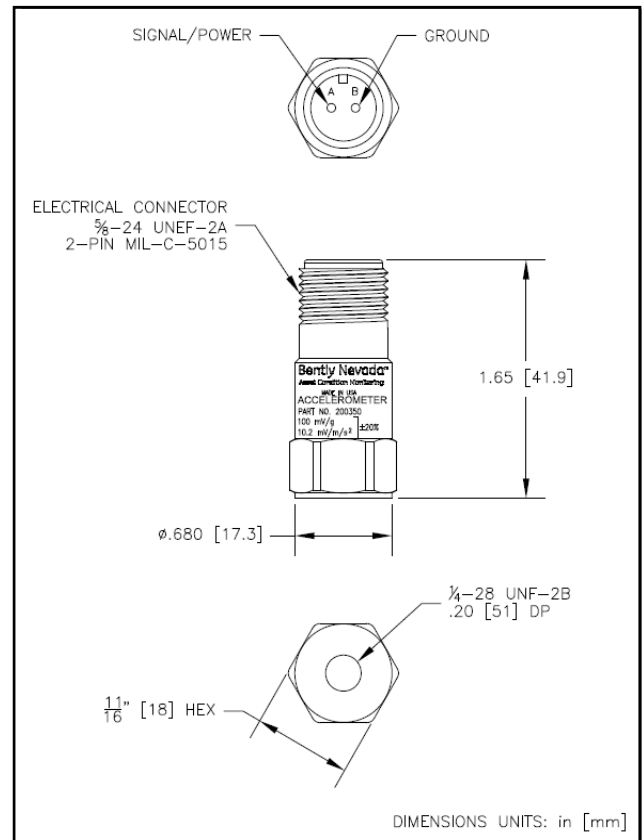


200350 Accelerometer Sensor

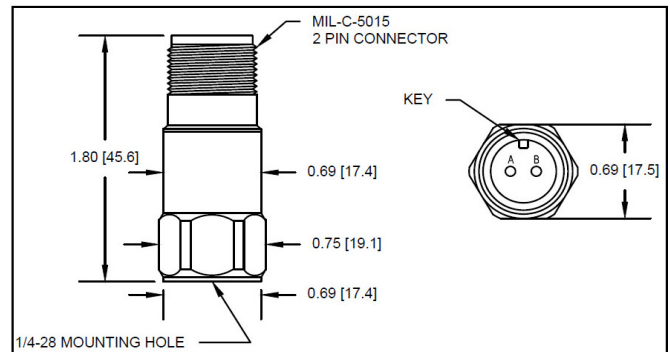


AM3100T2-Z2 Accelerometer Sensor

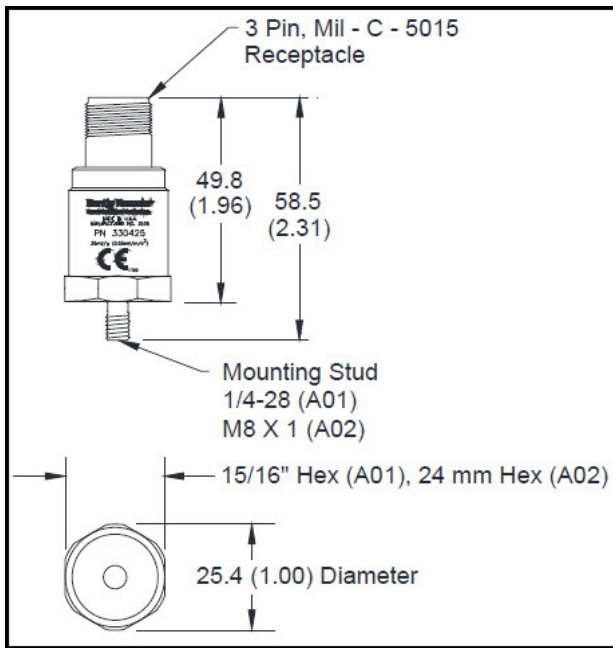


**330400/330425 Accelerometer Sensor**

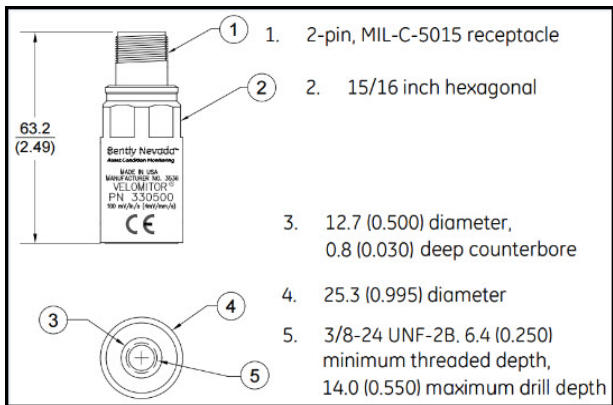


**330500 Velomitor**

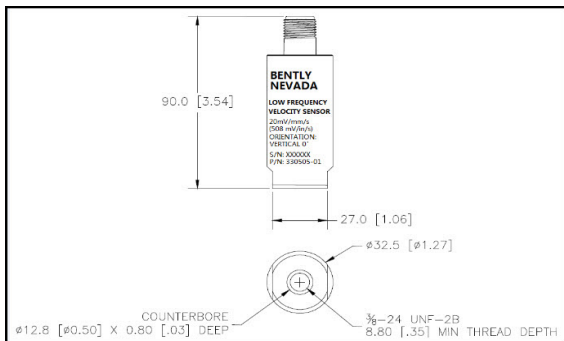


**330505 Velomitor**

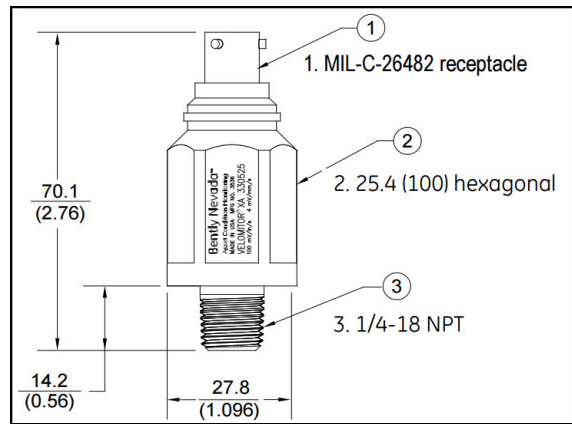


**330525 Velomitor**

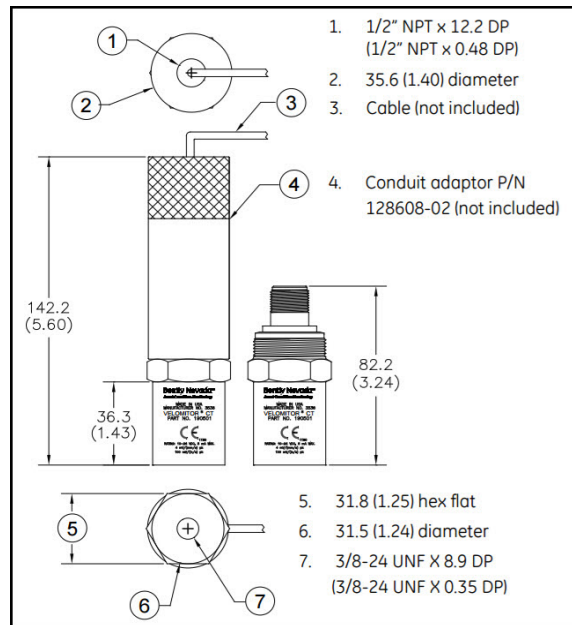

**190501 Velomitor**

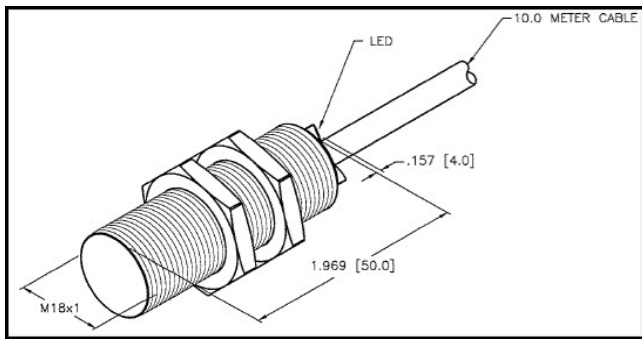

### 100M0741 Proximity Switch

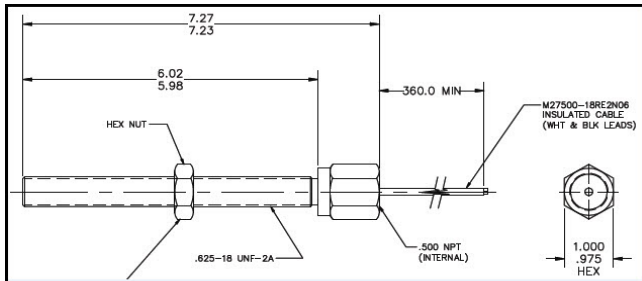

### 284947 Magnetic Pickup

### Proximity Transducer System

Refer to proximity transducer system datasheet for details.

172036	3300 5mm
141194-01	3300XL 8mm
146256-01	3300XL 11mm
147385-01	3300XL NSV

**02120015** Bulk Cable from Proximity sensor to monitor (500 ft.)

**9571-AA\*** Low cost cable for accelerometer

**AA:** From "02" to "99" Increments of 1.0 foot


INCREMENTS OF 1.0 FOOT			
EXAMPLE:	<table border="1"><tr><td>1</td><td>2</td></tr></table> = 12 FEET	1	2
1	2		
	<table border="1"><tr><td>2</td><td>5</td></tr></table> = 25 FEET	2	5
2	5		
MIN LENGTH = 2.0 FEET			
MAX LENGTH = 99 FEET			

**84661-AA\*** Armored cable for 2-wire transducer

**AA:** From "03" to "99" Increments of 1.0 foot

INCREMENTS OF 1.0 FOOT			
EXAMPLE:	<table border="1"><tr><td>1</td><td>2</td></tr></table> = 12 FEET	1	2
1	2		
	<table border="1"><tr><td>2</td><td>5</td></tr></table> = 25 FEET	2	5
2	5		
MIN LENGTH = 3.0 FEET			
MAX LENGTH = 99 FEET			

**CB2W100-AAA** Cable for 2-wire transducer


 Note: The CB2W100 cable is not recommended for use with the 200350 Accelerometer. The O-ring will not form a proper seal with the accelerometer.


**AAA:**

<b>0 1 5</b>	15 ft. (4.8 m)
<b>0 3 2</b>	32 ft. (9.8 m)
<b>0 6 4</b>	64 ft. (19.5 m)
<b>1 1 2</b>	112 ft. (34.1 m)
<b>1 2 5</b>	125 ft. (38.1 m)
<b>1 5 0</b>	150 ft. (45.7 m)
<b>2 0 0</b>	200 ft. (61.0 m)
<b>2 5 0</b>	250 ft. (76.2 m)

### Splash Proof Cable for 2-wire transducer

**9571 Mod : 285031-AA\*** Cable for 2-wire extension with Splash Proof Connection. This cable assembly provides an equivalent IP66 level of protection.

 **Note:** For Proximity 3300-NSV and Accelerometer 330400 need metal conduit for conducted RF performance.

 **Note:** Cable lengths greater than 30 meters (100 feet) will experience some attenuation of amplitudes at higher frequencies when using the AM3100T2-Z2 Accelerometer.

## AA :

	16	16 ft. (4.8 m)
	32	32 ft. (9.8 m)
	64	64 ft. (19.5 m)
286244		Magnetic mounting base ¼-28 threaded hole

## Ethernet Cables

138131-AAA	Standard 10 Base-T/100 Base-TX Shielded Category 5 Cable with RJ-45 connectors (solid conductor)
------------	--

## AAA: Cable Length

006	6 ft. (1.8 m)
010	10 ft. (3.0 m)
025	25 ft. (7.6 m)
040	40 ft. (12.2 m)
050	50 ft. (15.2 m)
075	75 ft. (22.9 m)
085	85 ft. (25.9 m)
100	100 ft. (30.5 m)

## Spares

105M6203-01	35mm DIN rail mount and screws (included with 2300/20 monitor)
106M3210	10-pin 4-20mA output connector
106M2223	5-pin contact input connector (Alarm Reset)
106M3408	5-pin contact input connector (Alarm Inhibit, Config lock)
106M3211	16-pin transducer input connector
106M3212	6-pin relay output connector
106M2231	3-pin power input connector

## Accessories

02120015	Bulk Cable from Proximity sensor to monitor (500 ft.)
9571-AA*	Low cost cable for 2-wire transducer

## Software

100M9465-01	BN Monitor Configuration SW/FW DVD -BNMC version 5.2 or greater -2300 series monitor firmware (DVD includes 2300 Series Software Guide)
-------------	--

## Additional Information

2300 Series Operation and Maintenance Manual (Document 105M0341)


2300 Field Wiring Diagram (Document 106M5801)

2300 Series Software Guide (Document 107M7626)

2300 Series Monitor Installation Guide (Document 121M3029)


<https://www.gemeasurement.com/condition-monitoring-and-protection/distributed-monitoring/bently-nevada-2300-series-vibration>

# Graphs and Figures

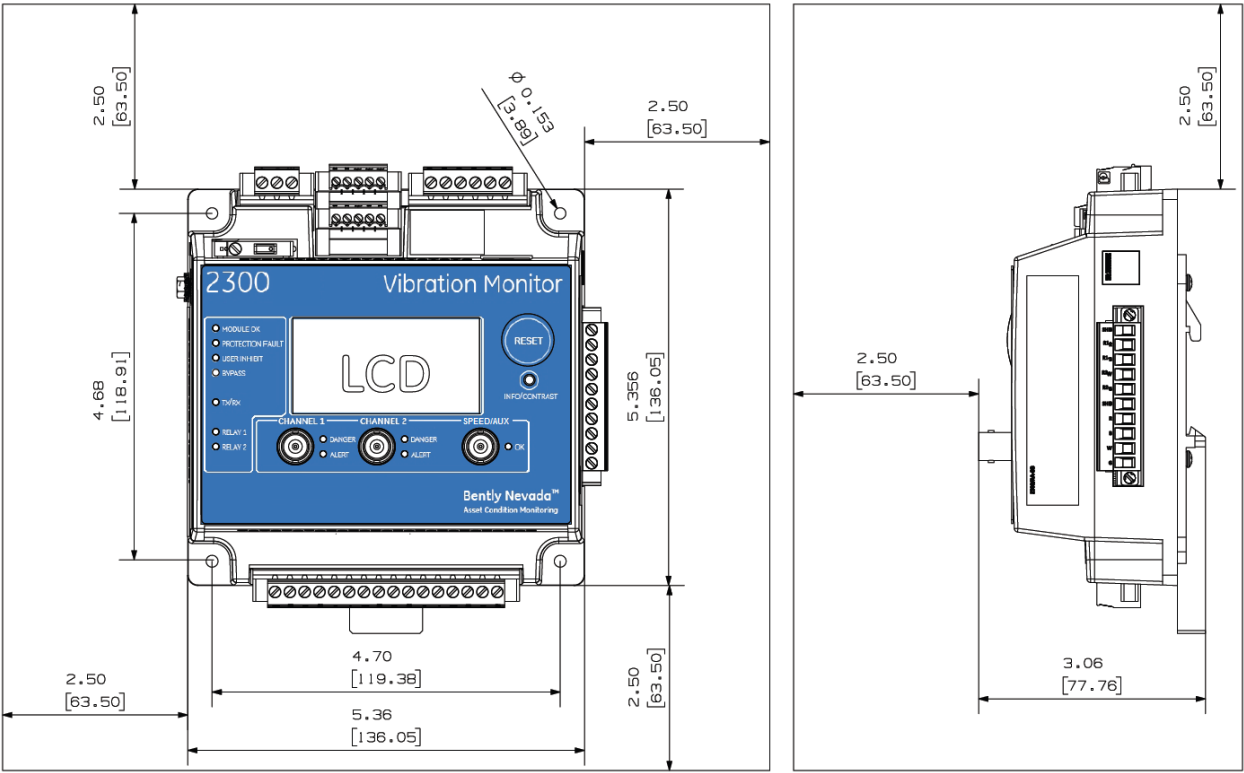


2300 Series Monitor Recommended Clearance

# Wiring Diagram

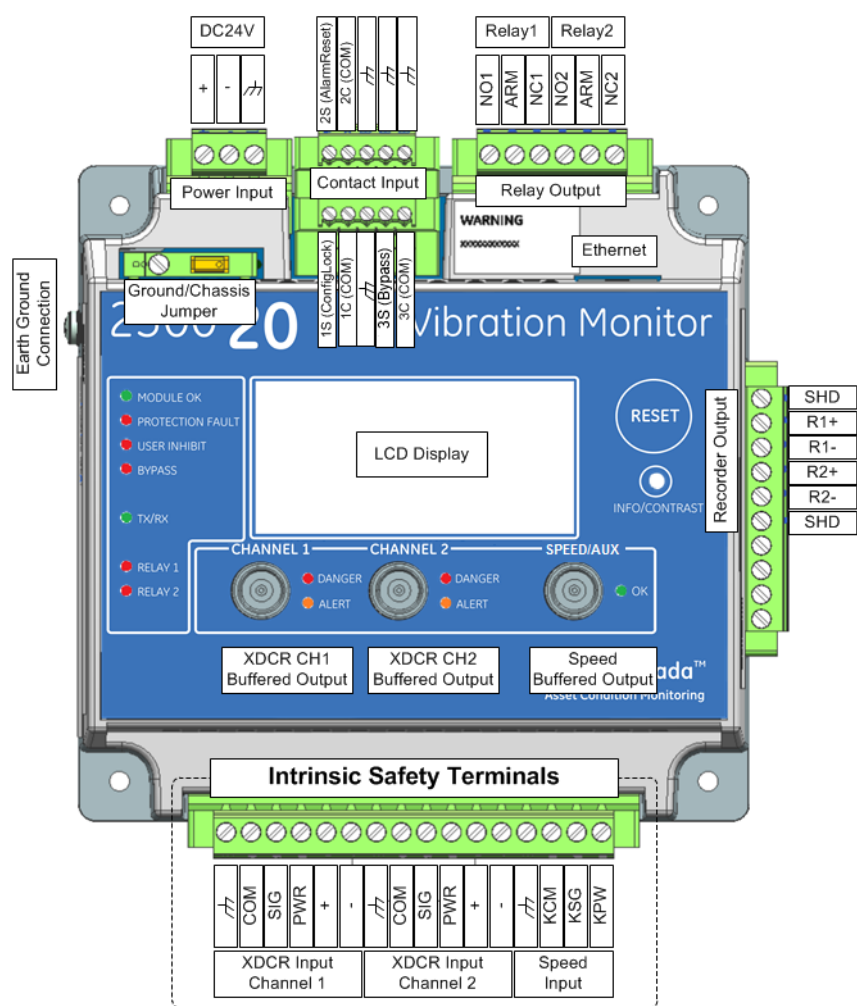

2300/20 Wiring Diagram

 Note: 2300/20 and 2300/25 use the same interface connector for recorder output or SPA output.

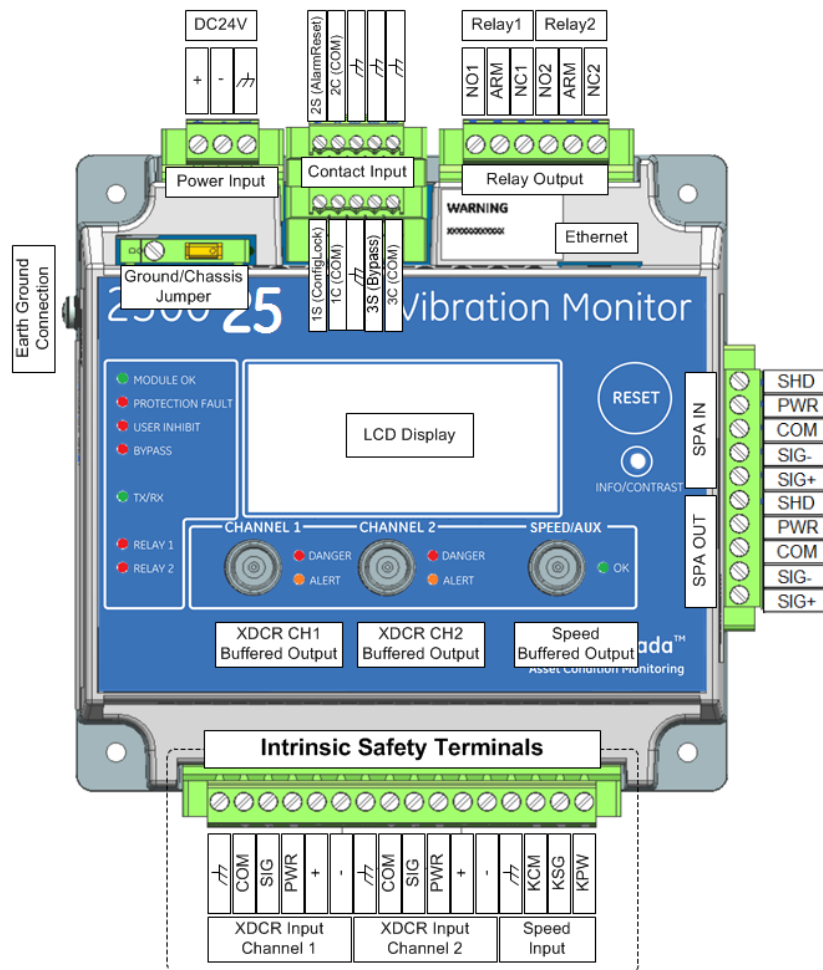

2300/25 Wiring Diagram

 Note: 2300/20 and 2300/25 use the same interface connector for recorder output or SPA output.

© 2014-2017 Bently Nevada, LLC. All rights reserved.

\* Denotes a trademark of Bently Nevada, LLC, a wholly owned subsidiary of General Electric Company.

All product and company names are trademarks of their respective holders.

Use of the trademarks does not imply any affiliation with or endorsement by the respective holders.

The information contained in this document is subject to change without prior notice.

Printed in USA. Uncontrolled when transmitted electronically.

1631 Bently Parkway South, Minden, Nevada USA 89423

Phone: 1-775.782.3611 [www.GEmeasurement.com](http://www.GEmeasurement.com)