
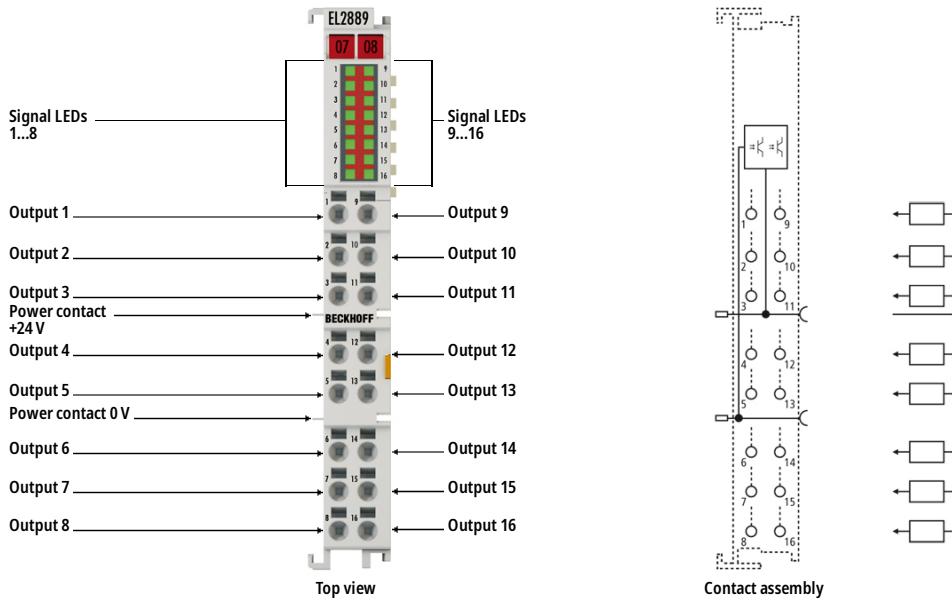


EL2889 | EtherCAT Terminal, 16-channel digital output, 24 V DC, 0.5 A, ground switching



i Product status: Regular delivery

The EL2889 digital output terminal connects the binary 24 V DC control signals from the automation device on to the actuators at the process level with electrical isolation. The EtherCAT Terminal has 16 channels, whose signal states are indicated by LEDs. The connection technology is particularly suitable for single-ended inputs. All components have to use the same reference point as the EL2889. The power contacts are connected through. In the EL2889 the outputs are supplied via the 0 V DC power contact.

Special features:

- ground switching
- Connection of different load types possible (ohmic, inductive, lamp load)
- Max. output current 0.5 A per channel
- Overload and short-circuit proof outputs and reverse polarity protection
- Tool-free connection by direct plug-in technology for solid wire conductors
- Space-saving use in the control cabinet
- Direct connection of multi-channel sensors in 1-wire connection technology in the smallest space
- Increased packing density with 16 connection points in the housing of a 12 mm terminal block

Product information

Technical Data

Technical data	EL2889
Connection technology	1-wire
Number of outputs	16

Nominal voltage	24 V DC (-15 %/+20 %)
Load type	ohmic, inductive, lamp load
Distributed clocks	–
Max. output current	0.5 A (short-circuit proof) per channel
Short-circuit current	typ. < 7 A
Reverse voltage protection	yes
Breaking energy	< 100 mJ/channel
Switching times	typ. TON: 50 µs, typ. TOFF: 200 µs
Current consumption E-bus	typ. 140 mA
Electrical isolation	500 V (E-bus/field potential)
Current consumption power contacts	typ. 30 mA + load
Bit width in the process image	16 outputs
Configuration	no address or configuration setting
Weight	approx. 70 g
Operating/storage temperature	-25...+60 °C/-40...+85 °C
Relative humidity	95 %, no condensation
Vibration/shock resistance	conforms to EN 60068-2-6/EN 60068-2-27
EMC immunity/emission	conforms to EN 61000-6-2/EN 61000-6-4
Protect. rating/installation pos.	IP20/variable
Approvals/markings	CE, UL, ATEX
Ex marking	II 3 G Ex nA IIC T4 Gc

Housing data	EL-12-16pin
Design form	HD (High Density) housing with signal LEDs
Material	polycarbonate
Dimensions (W x H x D)	12 mm x 100 mm x 68 mm
Installation	on 35 mm DIN rail, conforming to EN 60715 with lock
Side by side mounting by means of	double slot and key connection
Marking	labeling of the BZxxx series
Wiring	solid conductors (e): direct plug-in technique; fine-stranded conductors (f) and ferrule (a): spring actuation by screwdriver
Connection cross-section	s*: 0.08...1.5 mm ² , st*: 0.25...1.5 mm ² , f*: 0.14...0.75 mm ²
Connection cross-section AWG	s*: AWG 28...16, st*: AWG 22...16, f*: AWG 26...19
Stripping length	8...9 mm
Current load power contacts	I _{max} : 10 A

*s: solid wire; st: stranded wire; f: with ferrule