


LV833036SP

XF or MX voltage release, diagnostics and communicating, Masterpact MTZ1/2/3, 200/250 VAC, 200/250 VDC, spare part

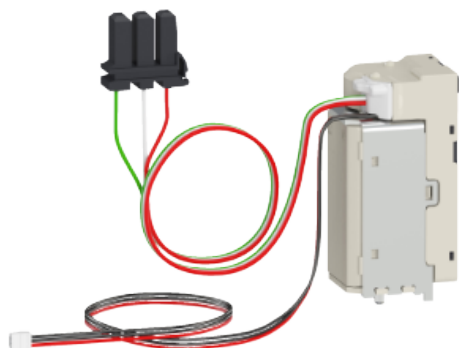

Main

Range	Masterpact
Product or component type	Voltage release
Device application	Control
Range compatibility	Masterpact MTZ1 circuit-breaker Masterpact MTZ2 circuit-breaker Masterpact MTZ3 circuit-breaker
Voltage release type	Closing coil Opening coil

Complementary

Control type	Communicating
Signalling function	Error Coil powered Electrical push-button activated Ready to close or open
[Un] voltage power supply	200/250 V AC 50/60 Hz 200/250 V DC
Threshold tripping voltage	0.7...1.1 Un on opening 0.85...1.1 Un on closing
Holding power consumption	4.5 W
Circuit breaker mounting mode	Fixed/drawout
Maximum response time	60 ms on opening for Masterpact MTZ1 60 ms on opening for Masterpact MTZ2 60 ms on opening for Masterpact MTZ3 65 ms on closing for Masterpact MTZ1 80 ms on closing for Masterpact MTZ2 90 ms on closing for Masterpact MTZ3
Provided equipment	1 instruction sheet
Offer type	Spare part

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information

Contractual warranty

Warranty	18 months
----------	-----------