



Level



Pressure



Flow



Temperature



Liquid
Analysis



Registration



Systems
Components



Services



Solutions

Technical Information

Liquiphant T FTL20H

Level limit switch for liquids in the foodstuff industry, compact design, housing made of corrosion-resistant stainless steel



Application

The Liquiphant T FTL20H is a level limit switch for liquids in storage tanks, agitators and pipes which have to meet particularly high hygiene standards internally and externally.

It is used in particular in areas where other measurement methods would probably fail: e.g. in the event of viscosity, build-up, turbulences, flows, air bubbles, rash temperature change when cleaning.

The Liquiphant T FTL20H is a hygiene version for fluid temperatures up to 150 °C.

Your benefits

- E.g. stainless steel housing with round connector M12x1, degree of protection IP69K, always air-tight even in the event of hour-long overflowing and intensive cleaning
- External test option using test magnet
- On-site function control using external LED display
- Large selection of process connections for hassle-free installation in existing systems
- Easy to install even at points difficult to access due to compact design
- Rugged stainless steel housing (316L)
- CIP and SIP cleanability ensured
- EHEDG certification

Table of contents

Function and system design	3	Terminals	13
Measuring principle	3	Human interface	14
Measuring system	3	Function test with test magnet	14
Input	4	Light signals	14
Measured variable	4	Certificates and approvals	17
Measuring range	4	CE mark, declaration of conformity	17
Output	4	Sanitary compatibility	17
Switching outputs	4	Overfill protection	17
Operating modes for variants AC and DC-PNP	4	Marine approval	17
Power supply	5	Other standards and guidelines	17
Cable entry	5	Ordering information	17
Electrical connection	6	Liquiphant T FTL20H	17
Performance characteristics	8	Accessories	18
Switching delay	8	Socket wrench	18
Reference operating conditions	8	Welding neck G ¾	18
Measured value resolution	8	Welding neck G ¾	19
Measuring frequency	8	Welding neck G 1	19
Maximum measured error	8	Welding neck	20
Repeatability	8	Coupling nut	20
Hysteresis	8	Cable	20
Settling time	8	Supplementary documentation	21
Influence of ambient temperature	8	Operating Instructions	21
Influence of medium temperature	8	Technical Information	21
Influence of medium pressure	8	Certificates	21
Operating conditions: Installation instructions	9		
Orientation	9		
Connecting cable	9		
Operating conditions: Environment	9		
Ambient conditions	9		
Storage temperature	9		
Degree of protection	9		
Shock resistance	10		
Vibration resistance	10		
Electromagnetic compatibility	10		
Overvoltage protection	10		
Operating conditions: Process	10		
Medium temperature range and process pressure	10		
State of aggregation	10		
Density	10		
Viscosity	10		
Gas content	10		
Solids content ø	10		
Mechanical construction	11		
Design, dimensions	11		
Process connections	11		
Weight	13		
Materials	13		
Housing	13		

Function and system design

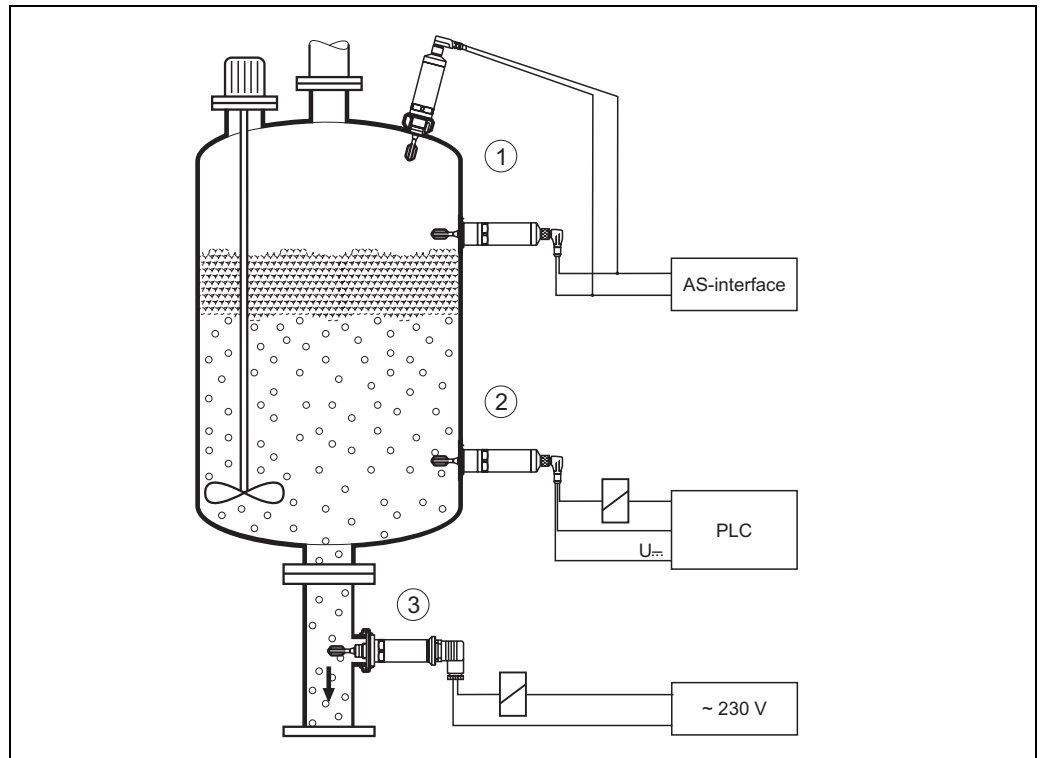
Measuring principle

The tuning fork of the FTL20H is brought to its resonance frequency by means of a piezoelectric drive. If the tuning fork is covered by liquid, this frequency changes. The electronics of the FTL20H monitor the resonance frequency and indicate whether the tuning fork is freely vibrating or is covered by liquid.

Measuring system

The measuring system comprises:

- Liquiphant T FTL20H limit switch
- Programmable logic control (PLC), miniature contactor, solenoid valve or AS-i bus



L00-FTL20Hxx-14-05-xx-en-001

Example 1): Overfill protection or top level detection

Example 2): Lower level detection or dry running protection

Example 3): Dry running protection for pump

Input

Measured variable	Density
Measuring range	> 0.7 g/cm ³ Other density settings on request, e.g. 0.5 g/cm ³

Output

Switching outputs

	DC-PNP valve connector	DC-PNP M12x1	AC 2-wire	AS-i
Function	Positive voltage signal at the switch output of the electronics (PNP)		Switching the power supply line	Switching the D0 bit
Switch behaviour	ON/OFF			0 / 1 (free / covered)
Relay switching capacity	250 mA			D0 bit
Fail-safe mode	MIN/MAX (see below)			D1 bit D1: 0 error
Switching delay	approx. 0.5 s on coverage / approx. 1.0 s on tuning fork becoming uncovered other switching time on request			
Switching threshold	with vertical orientation: 13.0 mm from top of fork with horizontal orientation: 3.5 mm from fork centre			
Hysteresis	3 ±0.5 mm			

Operating modes for variants AC and DC-PNP

The FTL20H can be connected in two operating modes. By choosing the suitable operating mode (MAX or MIN safety), you ensure that the FTL20H switches safely even in the event of a fault (e.g. if the power supply line is disconnected).

MAX - maximum safety

- The FTL20H keeps the electronic switch closed as long as the liquid level is below the fork.
- Example of an application: overflow protection

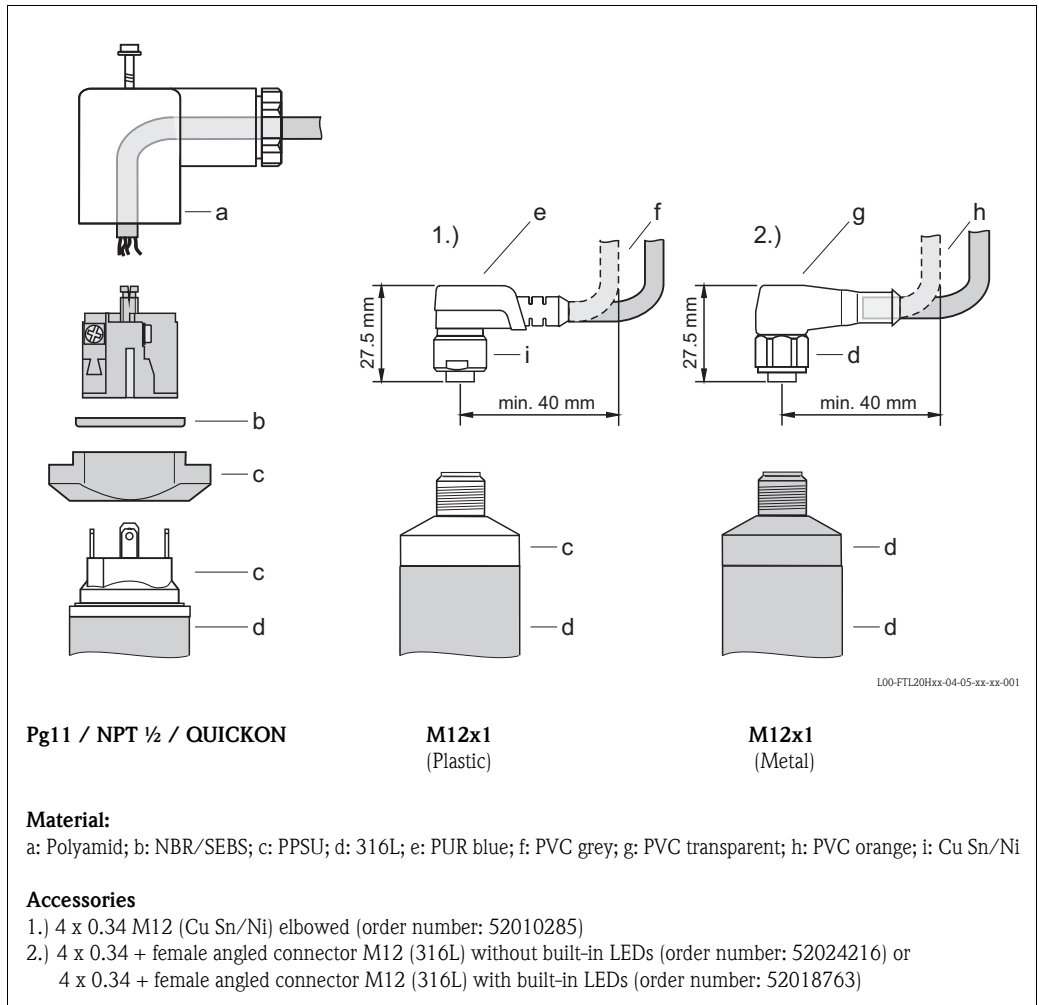
MIN - minimum safety

- The FTL20H keeps the electronic switch closed as long as the fork is immersed in liquid.
- Example of an application: dry running protection for pumps

The electronic switch opens if the limit is reached, if a fault occurs or the power fails.

Power supply

Cable entry







Electrical connection

Variant DC-PNP (direct current) M12x1 connector





Voltage source: shock-protected voltage or Class 2 circuit (North America)

Suitable for use in non-equivalent operation:





When both outputs are connected, the MIN and MAX outputs take on opposite states in trouble-free operation. In the event of an alarm condition or a line break, both electronic switches are open. In addition to level monitoring, function-dependent sensor monitoring can also be performed with the aid of 2-channel evaluation.

 Operating mode MAX (NC contact)	 Operating mode MIN (NO contact)
 L00-FTL20xxx-04-05-xx-xx-002	 L00-FTL20xxx-04-05-xx-xx-003
 1: BN 2: WT 3: BU 0.5 A L- L+ L00-FTL20xxx-04-05-xx-xx-009	 1: BN 3: BU 4: BK 0.5 A L- L+ L00-FTL20xxx-04-05-xx-xx-010

Variant DC-PNP (direct current) valve connector

 Operating mode MAX (NC contact)	 Operating mode MIN (NO contact)
 L00-FTL20xxx-04-05-xx-xx-004	 L00-FTL20xxx-04-05-xx-xx-005
 PE (Ground) L- L+ 0.5 A L00-FTL20xxx-04-05-xx-xx-011	 PE (Ground) L- L+ 0.5 A L00-FTL20xxx-04-05-xx-xx-012


Variant AC (alternating current) valve connector

 Operating mode MAX	 Operating mode MIN
 L00-FTL20xxx-04-05-xx-xx-006	 L00-FTL20xxx-04-05-xx-xx-007
 L00-FTL20xxx-04-05-xx-xx-013	 L00-FTL20xxx-04-05-xx-xx-014



Note!
Approved for relays with a holding power/rated power >2.5 VA (253 V) or > 0.5 VA (24 V).
Relays with lower holding power/rated power can be operated via a parallel-connected RC-element (option).

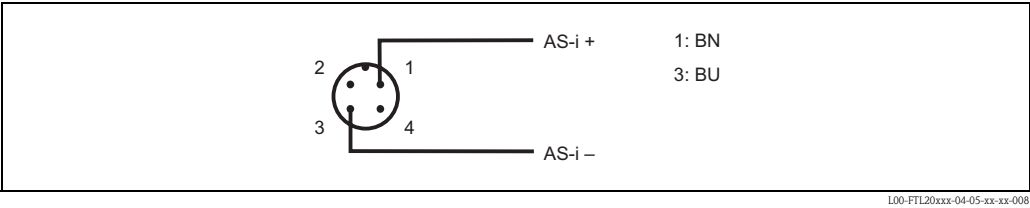Connect AS-i bus



Programming instructions for the AS-i

AS-i profile: S-3.A.1

The address is defaulted to 0 (HEX). It is changeable via the bus master or programming unit.

Data bit:

D0:1 Sensor covered	D1:1 Status = O.K.
D0:0 Sensor free	D1:0 Status = error
D2 and D3 are not used.	

Parameter bits (P0...P3) are not used.

Electrical connection	DC-PNP valve connector	DC-PNP M12x1	AC 2 wire	AS-i
Supply voltage	10...35 V DC	10...35 V DC	19...253 V AC	24.5...31 V DC
Cable entry	Pg11 / NPT ½ / QUICKON	M12x1	Pg11 / NPT ½ / QUICKON	M12x1
Cable specification	Max 1.5 mm ² and ø 3.5...6.5	IEC 60947-5-2	Max 1.5 mm ² and ø 3.5...6.5	IEC 62026-2
Power consumption	< 825 mW	< 825 mW	< 810 mW	< 825 mW
Current consumption	< 15 mA	< 15 mA	< 3.8 mA	< 25 mA
Residual ripple	5 Vss at 0...400 Hz	5 Vss at 0...400 Hz	–	–

Performance characteristics

Switching delay 0.5 s when covering
1.0 s when becoming free
Other switching time on request

Reference operating conditions Ambient temperature: 23 °C
Process pressure: 1 bar
Medium: water
Medium density: 1
Medium temperature: 23 °C
Installation from above/vertical
Density setting: > 0.7

Measured value resolution < 0.5 mm

Measuring frequency Approx. 1100 Hz in air

Maximum measured error 13.0 ±1 mm

Repeatability ±0.5 mm

Hysteresis 3.0 ±0.5 mm

Settling time < 2 s

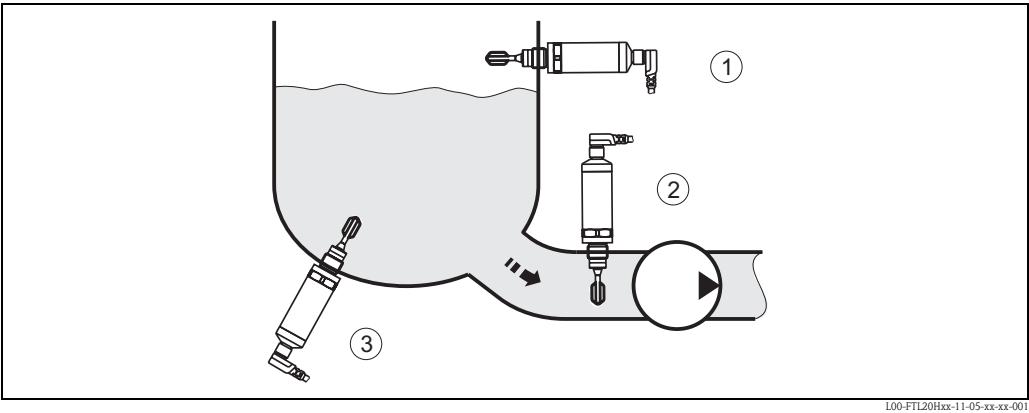
Influence of ambient temperature Negligible

Influence of medium temperature $-29.6 \times 10^{-3} \text{ mm/}^{\circ}\text{C}$

Influence of medium pressure $-55.2 \times 10^{-3} \text{ mm/bar}$

Operating conditions: Installation instructions

Orientation The Liquiphant T FTL20H can be installed in any position in a container or pipe. The formation of foam does not impair its function.




Example 1): Overflow protection or top level detection
Example 2): Dry running protection for pump
Example 3): Lower level detection

Connecting cable Up to 1000 m with AC/DC-PNP, AS-i to IEC 62026-2

Operating conditions: Environment

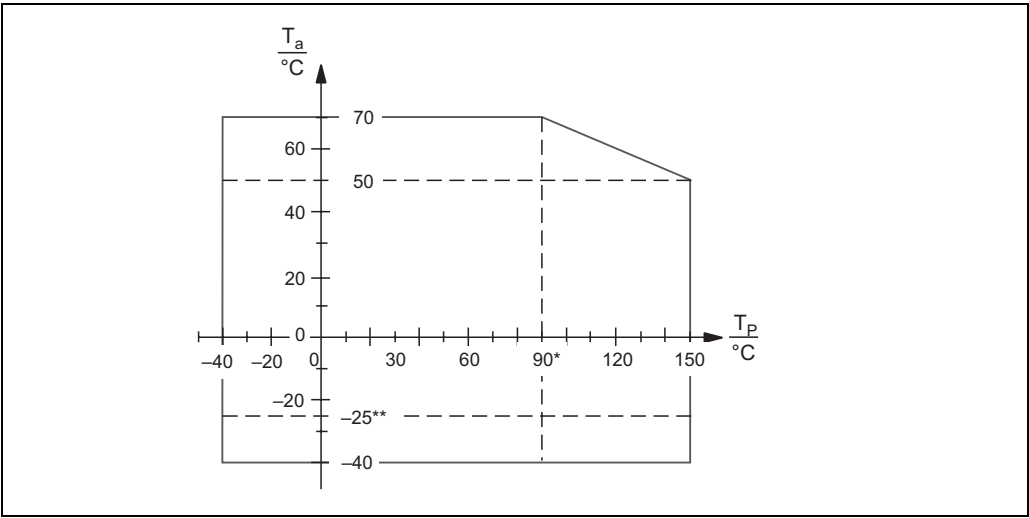Ambient conditions



* max. 150 mA relay switching capacity

** for AS-i elektronik

Ambient temperature T_a

Process temperature T_p

Storage temperature -40...+85 °C

Degree of protection

- IP65 with valve connector
- IP66/67 with M12x1 connector PPSU (plastic)
- IP66/68 with M12x1 connector 316L (metal);
IP69K with accessory 52024116 (signalling via connector without LEDs) or
IP69K with accessory 52018763 (signalling via connector with LEDs)

Shock resistance	To EN 60068-2-27 (30 g)
------------------	-------------------------


Vibration resistance	To EN 60068-2-64
----------------------	------------------

Electromagnetic compatibility	Interference emission to EN 61326, Electrical Equipment Class B, interference immunity to EN 61326, Annex A (Industrial) and NAMUR Recommendation NE 21 (EMC). AS-interface to EN 50295.
-------------------------------	--

Overvoltage protection	Overvoltage category III
------------------------	--------------------------

Operating conditions: Process

Medium temperature range and process pressure	
---	--

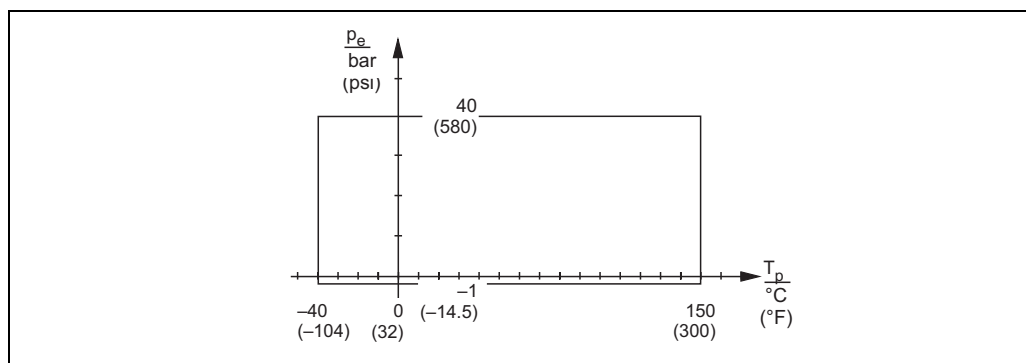

L00-FTL20Hex-05-05-xx-xx-001

State of aggregation	Liquid
----------------------	--------

Density	> 0.7 g/cm ³ (other density setting on request)
---------	--

Viscosity	1...10000 cst
-----------	---------------

Gas content	Stagnant mineral water
-------------	------------------------


Solids content σ	< 5 mm
-------------------------	--------

Mechanical construction



Note!
All dimensions in mm

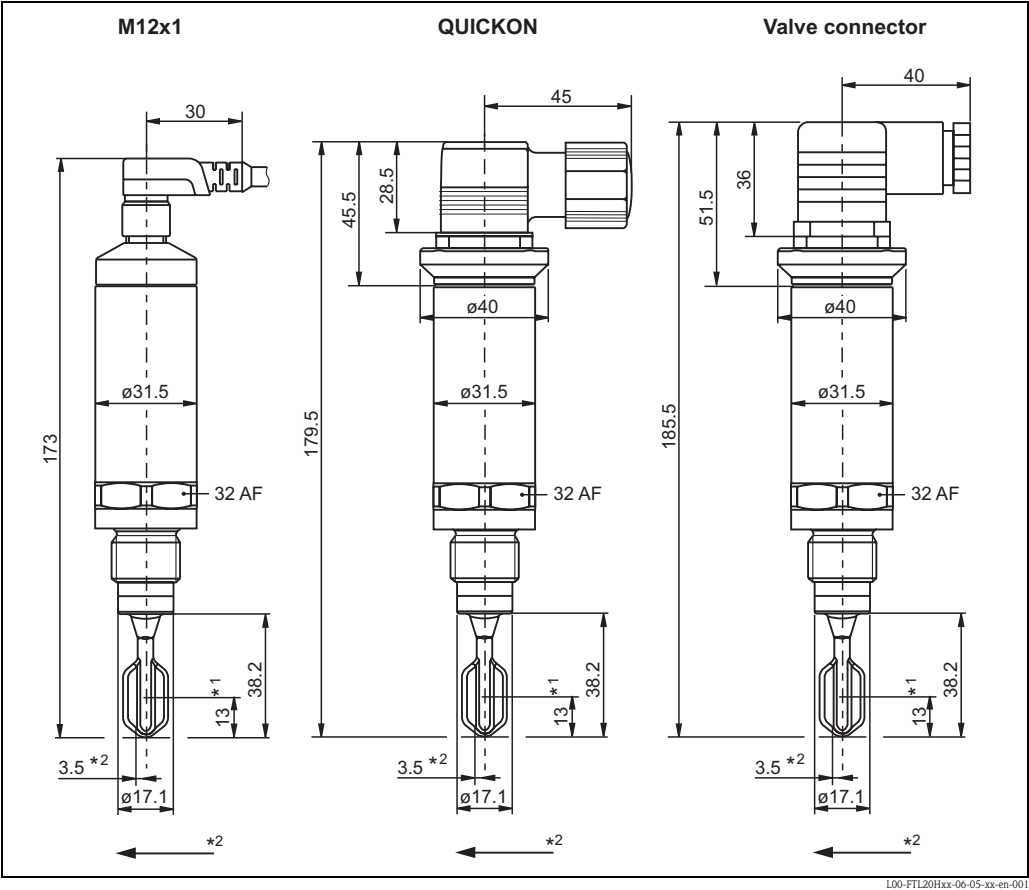Design, dimensions











*1 Switch point with vertical installation
*2 Switch point with horizontal installation; the level increases in the direction of the arrow

Switch points at: density 1 / 23 °C / 0 bar

Process connections

Process connection / Dimensions	Order code	Accessories (optional)	Pressure Temperature
G ½, G ¾ DIN ISO 228/1 L00-FTL20xxxx-06-05-xx-en-003	GCJ GDJ		max. 40 bar max. 150 °C

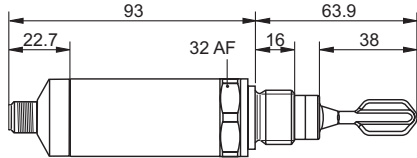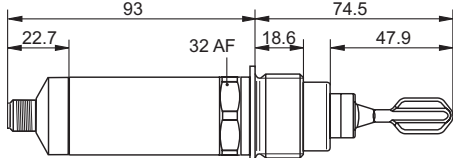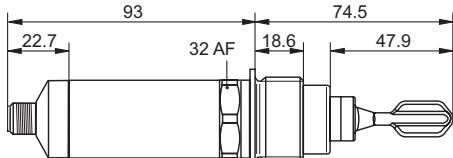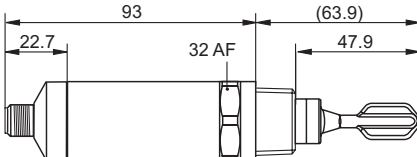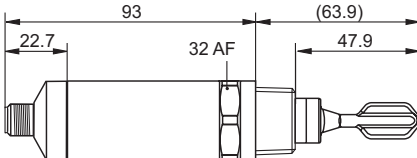Process connection / Dimensions	Order code	Accessories (optional)	Pressure Temperature
G ¾ DIN ISO 228/1 for flush-mounted installation in welding neck EHEDG with welding neck 52018765  L00-FTL20xxx-06-05-xx-en-003	GDJ	Welding neck (with defined thread start) with silicone O-ring Endress+Hauser 52018765 FDA approved materials according to 21 CFR Part 177.1550/2600 See also Page 18	max. 25 bar max. 150 °C max. 40 bar max. 100 °C
G 1 DIN ISO 228/1  L00-FTL20xxx-06-05-xx-en-004	GEJ		max. 40 bar max. 150 °C
G 1 DIN ISO 228/1 with sealing surface for flush-mounted installation in welding neck EHEDG with welding neck 52001051 (Seal geometry same as e.g. FTL260)  L00-FTL20xxx-06-05-xx-en-004	GEJ	Welding neck (with defined thread start) with silicone O-ring Endress+Hauser 52001051 FDA approved materials according to 21 CFR Part 177.1550/2600 See also Page 19	max. 25 bar max. 150 °C max. 40 bar max. 100 °C
NPT ½ ANSI B 1.20.1 R ½ DIN 2999  L00-FTL20xxx-06-05-xx-en-005	RCJ RRJ		max. 40 bar max. 150 °C
NPT ¾ ANSI B 1.20.1 R ¾ DIN 2999  L00-FTL20xxx-06-05-xx-en-005	RDJ RSJ		max. 40 bar max. 150 °C

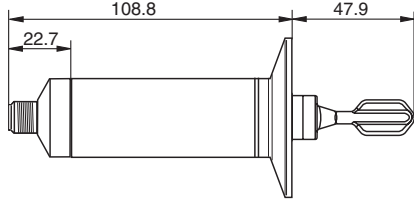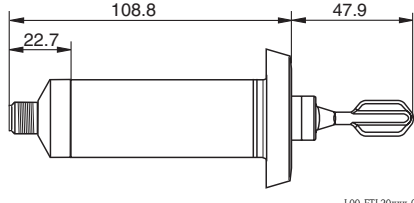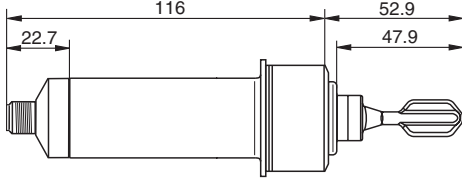Process connection / Dimensions	Order code	Accessories (optional)	Pressure Temperature
Tri-Clamp DN 25-38 (1½") = ø50.5 mm DN 40-51 (2") = ø64.0 mm ISO 2852 EHEDG only with 2" version and special seal. (Seal: manufacturer, Hyjoin Limited, UK) Clamping ring and front seal are not included and can be purchased from retailers.  L00-FTL20xxx-06-05-xx-xx-008	TCJ TDJ		max. 16 bar max. 120 °C max. 2 bar max. 150 °C
Threaded pipe joint DN 25 DN 32 DN 40 DIN 11851 Coupling nut and sealing ring are not included and can be purchased from retailers.  L00-FTL20xxx-06-05-xx-xx-009	MNJ MPJ MQJ		DN 25, DN 32, DN 40: max. 40 bar up to 100 °C max. 25 bar up to 140 °C DN 50: max. 25 bar max. 140 °C
Flush-mounted for welding neck 1" Works standard Endress+Hauser with silicone seal and coupling nut (accessory 52021715): included EHEDG  L00-FTL20xxx-06-05-xx-xx-010	UPJ	Welding neck (tuning fork can be aligned) Endress+Hauser 52001047 FDA approved materials according to 21 CFR Part 177.1550/2600 See also Page 20	max. 40 bar max. 100 °C max. 25 bar max. 150 °C

Weight Approx. 300 g

Materials Sensor and housing made of 316L, surface quality Ra < 1.5 µm
(In the area of the weld surface grade is not defined.)

Housing Pipe housing

Terminals Valve connector,
QUICKON,
M12x1

Human interface

Function test with test magnet

Variants AC and DC-PNP:

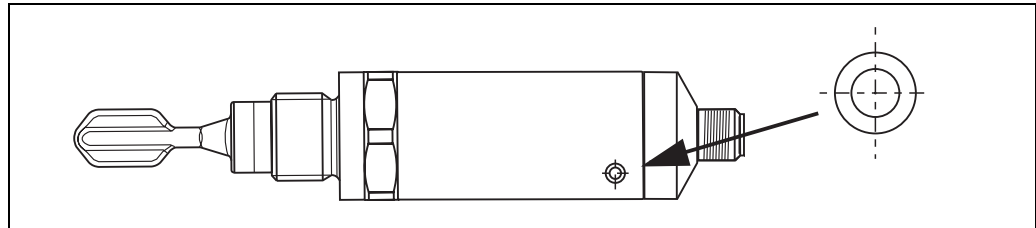
On testing, the current state of the electronic switch is reversed.

Variant AS-interface:

On testing, D0 is inverted.

Performing test

Hold the test magnet against the mark on the nameplate:




L00-FTL20Hxx-19-05-xx-xx-001

The switching state changes.

Light signals

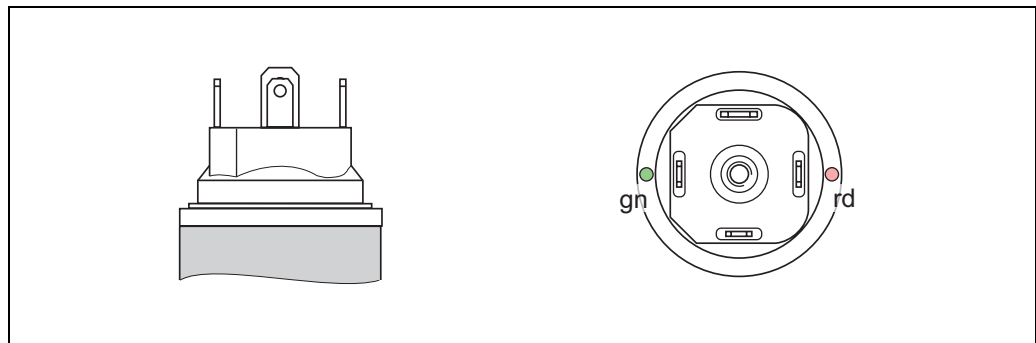Variants AC and DC-PNP with valve connector/QUICKON



L00-FTL20Hxx-07-05-xx-xx-001

Green light (gn) lighting:

FTL20H is connected to the power supply and is operational.

Red light (rd) lighting:

Mode of operation MAX (overflow protection): sensor is immersed in liquid.

Mode of operation MIN (dry running protection): sensor is not covered by liquid.

Green light (gn) does not come on

Error:

No power supply.

- Check plug, cable and power supply

Red light (rd) flashing:

Error:

Overload or short-circuit in load circuit.

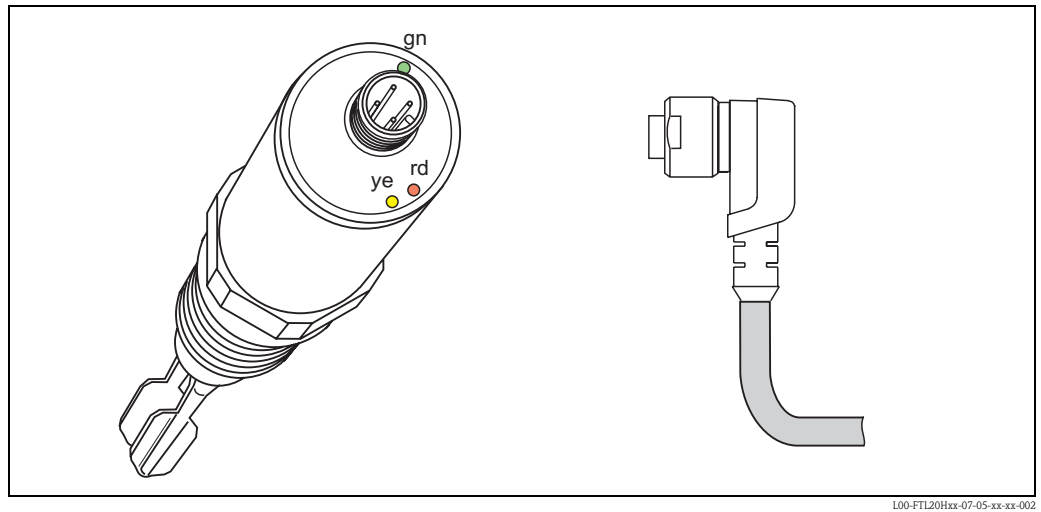
- Rectify the short-circuit
- Reduce maximum load current to below 250 mA

Error:

Internal sensor error or sensor corroded.

- Replace device

Variant AS-interface and DC-PNP with M12x1 circular connector PPSU



Green light (gn) lighting:

FTL20H is connected to the power supply and is operational.

Yellow light (ye) lighting:

Sensor is immersed in liquid.

Red light (rd) lighting with AS-interface:

Error:

Address 0 set or communication error.

- Carry out addressing process
- Parameterise slave
- Or reduce line length (< 100 m total length)

Red light (rd) lighting with DC-PNP

Error:

Overload or short-circuit in load circuit.

- Rectify the short-circuit
- Reduce maximum load current to below 250 mA

Green light (gn) does not come on

Error:

No power supply.

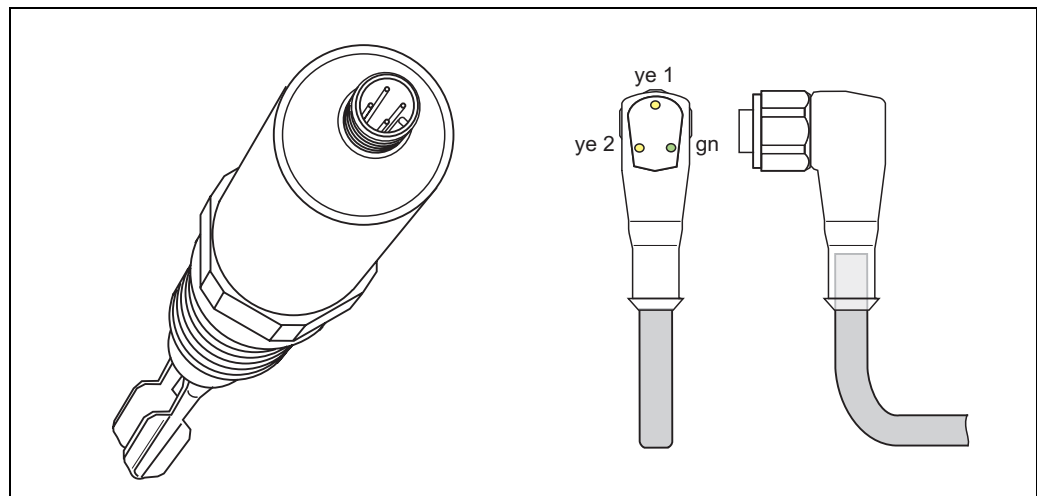
- Check plug, cable and power supply

Red light (rd) flashing (2 Hz):

Error:

Internal sensor error or sensor corroded.

- Replace device

Variant DC-PNP with M12x1 circular connector 316L

100-FTL20Hxx-07-05-xx-xx-003

Green light (gn) lighting:

FTL20H is connected to the power supply and is operational.

Yellow light (ye 1) lighting:

Sensor is not covered by liquid.

Yellow light (ye 2) lighting:

Sensor is immersed in liquid.

Green light (gn) does not come on

Error:

No power supply.

- Check plug, cable and power supply

Green light (gn) lighting, both yellow lights (ye 1+2) does not come on

Error:

short-circuit in load circuit.

- Rectify the short-circuit

Error:

Internal sensor error or sensor corroded.

- Replace device

Certificates and approvals



Note!

The specified certificates and approvals are available on www.endress.com/ftl20.

CE mark, declaration of conformity	The instrument is designed to meet state-of-the-art safety requirements, has been tested and left the factory in a condition in which it is safe to operate. The instrument complies with the applicable standards and regulations as listed in the EC declaration of conformity and thus complies with the statutory requirements of the EG directives. Endress+Hauser confirms the successful testing of the instrument by affixing to it the CE mark.
Sanitary compatibility	EHEDG (see process connections on Page 11), approval number: 3119/03/0445
Overfill protection	WHG and leakage
Marine approval	German Lloyd (GL), approval number: 42855-02HH
Other standards and guidelines	AS-i profile S-3.A.1 as per EN 50295 (limit switch)

Ordering information

Liquiphant T FTL20H

10	Approval: *					
	0	Non-hazardous area,		WHG (leakage monitoring)		
	3	CSA General Purpose,		CSA C US		
	9	Special version				
20	Process Connection:					
	GCJ	Thread ISO228	G ½,	316L		
	GDJ	Thread ISO228	G ¾,	316L	installation > accessory: welding neck	
	GEJ	Thread ISO228	G 1,	316L	installation > accessory: welding neck	
	RCJ	Thread ANSI	NPT ½,	316L		
	RDJ	Thread ANSI	NPT ¾,	316L		
	RRJ	Thread DIN2999	R ½,	316L		
	RSJ	Thread DIN2999	R ¾,	316L		
	UPJ	Flush-mounted,		316L	installation > accessory: welding neck 1" 52001047	
	TCJ	Tri-Clamp ISO2852	DN25-38 (1...1½"),	316L		
	TDJ	Tri-Clamp ISO2852	DN40-51 (2"),	316L		
	MNJ	DIN11851	DN25 PN40,	316L		
	MPJ	DIN11851	DN32 PN40,	316L		
	MQJ	DIN11851	DN40 PN40,	316L		
	YY9	Special version				
30	Switch Output:					
	1	2-wire	19...253 V AC			
	2	3-wire, PNP	10... 35 V DC			
	3	AS-i bus				
	9	Special version				
40	Application; Cable entry:					
	B	150 °C,	Plug	Pg11,	ISO4400,	IP65/67
	C	150 °C,	Plug	NPT ½,	ISO4400,	IP65
	D	150 °C,	Plug	M12,		IP67
	E	150 °C,	Plug	QUICKON,		IP65
	F	150 °C,	Plug	M12,		IP69K
	Y	Special version				
FTL20H						Order code

* The specified certificates and approvals are available on www.endress.com/ftl20.

- All dimensions in mm
- More detailed information about weld-in adapter can be taken from TI426F/00.

L00-FTL20xxx-06-05-xx-xx-011

Welding neck G 3/4

Order number: 52028295
EN10204-3.1 material with inspection certificate

- For flush-mounted installation and sealing
- With defined thread start *
- Sensor cannot be aligned

Material: corrosion-resistant steel
1.4435 (AISI 316L)

Weight: 0.10 kg


Seal: silicone O-ring
Order number: 52021717 (5 piece set)

FDA approved materials according to
21 CFR Part 177.1550/2600



Note!
Use only for FTL20 and FTL20H!

(Use order number 71093129 for
FTL50, FTL50H, FTL51, FTL51H)



max. 25 bar
max. 150 °C

max. 40 bar
max. 100 °C

A0008265

Welding neck G 1

Order number: 52001051
Order number: 52011896
EN10204-3.1 material with inspection certificate


- For flush-mounted installation and sealing
- With defined thread start *
- Sensor cannot be aligned

Material: corrosion-resistant steel
1.4435 (AISI 316L)

Weight: 0.19 kg

Seal: silicone O-ring
Order number: 52014472 (5 piece set)

FDA approved materials according to
21 CFR Part 177.1550/2600



max. 25 bar
max. 150 °C

max. 40 bar
max. 100 °C

L00-FTL5xxxx-06-05-xx-xx-020

* The tolerance of the defined thread beginnings between welding neck and sensor amounts to $\pm 15^\circ$.

Welding neck

Order number: 52001047
 Order number: 52006909
 EN10204-3.1 material with inspection certificate


- For flush-mounted installation and sealing of a Liquiphant FTL50H, FTL20H with process connection EE2, UPJ
- Sensor can be aligned

Material: corrosion-resistant steel
 1.4435 (AISI 316L)

Weight: 0.15 kg

Profile gasket: Silicone
 Order number: 52014424 (5 piece set)

FDA approved materials according to
 21 CFR Part 177.1550/2600




L00-FTL5xxx-06-05-xx-xx-022

Coupling nut

Order number: 52021715
 for connection UPJ or
 welding neck 52001047
 DIN 11851-F25-1.4301

Weight: 0.17 kg


When ordering "process connection for flush-mounted installation (UPJ)" the delivery includes the coupling nut.



L00-FTL20Hxx-06-05-xx-xx-007


Cable

Order number: 52010285
 4 x 0,34 M12 socket
 Cable: PVC (grey) 5 m length
 Body: PUR (blue)
 Coupling nut: Cu Sn/Ni
 Protection: IP67
 Temperature range: -25 °C to +70 °C




L00-FTL20Hxx-07-05-xx-xx-004

Order number: 52024216
 4 x 0,34 M12 socket
 Cable: PVC (orange) 5 m length
 Body: PVC (orange)
 Coupling nut: 316L
 Protection: IP69K (fully locked)
 Temperature range: -25 °C to +70 °C



L00-FTL20Hxx-07-05-xx-xx-005

Order number: 52018763
 4 x 0,34 M12 socket with integrated LEDs
 Cable: PVC (orange) 5 m length
 Body: PVC (transparent)
 Coupling nut: 316L
 Protection: IP69K (fully locked)
 Temperature range: -25 °C to +70 °C



L00-FTL20Hxx-07-05-xx-xx-005

Supplementary documentation

Operating Instructions

- FTL20H
KA214F/00/a6
- Welding neck G ¾
KA219F/00/a6

Technical Information

Weld-in adapter
 TI426F/00/de

Certificates

- Liquiphant FTL20, FTL20H
Allgemeine bauaufsichtliche Zulassung Z-65.11-311
ZE247F/00/de
- Liquiphant FTL20, FTL20H (Leckage)
Allgemeine bauaufsichtliche Zulassung Z-65.40-312
ZE248F/00/de
- Liquiphant FTL20, FTL20H
Number of the Certification Document 37102
ZE249F/00/a2
- Liquiphant FTL20, FTL20H
Certificate of Compliance No. 1238461
ZE250F/00/en



Note!

The specified certificates and approvals are available on www.endress.com → download.

Instruments International

Endress+Hauser
Instruments International AG
Kaegenstrasse 2
4153 Reinach
Switzerland

Tel. +41 61 715 81 00
Fax +41 61 715 25 00
www.endress.com
info@ii.endress.com

Endress+Hauser 
People for Process Automation

