



RHTemp1000IS Intrinsic Safety User Notice

Intrinsic Safety Approval:

The RHTemp1000IS has been certified by FM Approvals as Intrinsically Safe (IS) for use in Class I, Division 1, groups A, B, C, D, and Nonincendive (NI) for use in Class I, Division 2, groups A, B, C, D Hazardous (Classified) Locations. The rating listed in the Factory Mutual approval guide is as follows:

RHTemp1000is. Temperature and Humidity Recorder.

IS / I / 1 / ABCD T4A Ta=80°C; NI / I / 2 / ABCD / T4A Ta=80°C

These are the only safety ratings relevant to the use of this product. Use of this product in hazardous environments not specifically covered by this rating, is prohibited, unless the user takes the appropriate steps to ensure the safety of the product and assumes full responsibility for its safe use. Refer to the reference sections at the end of this document for further information on approval standards and environments.

Conditions of Use:

The following conditions must be satisfied to maintain the IS rating of the RHTemp1000IS:


- When used in hazardous locations, the RHTemp1000IS is to be **installed prior to the location becoming hazardous**, and **removed only after the area is no longer hazardous**.
- The maximum allowed ambient temperature for the RHTemp1000IS (under any circumstances) is **80°C**. The minimum rated operating temperature is -20°C.
- The RHTemp1000IS approved for use only with the **Tadiran TL-2150/S** battery. **Replacement with any other battery will void the safety rating.**
- Batteries are user replaceable, but are to be removed or replaced only in locations known to be **non-hazardous**.
- Tampering or replacement of non-factory components may adversely affect the safe use of the product, and prohibited. Except for replacement of the battery, **the user may not service the RHTemp1000IS**. MadgeTech, Inc. or an authorized representative must perform all other service to the product.



- The RHTemp1000IS enclosure does not carry a NEMA rating, as there are openings in the enclosure for measuring humidity. For this reason, the product is **only suitable for use in indoor locations**.

Required Labeling:

The following label must be engraved to the enclosure of the RHTemp1000IS. It contains critical information for the safe use of the product.

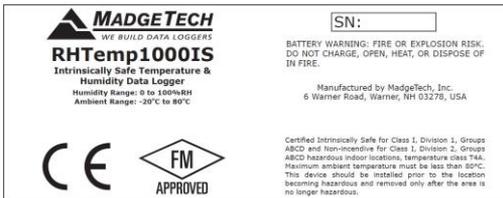

Reference Standards:

The RHTemp1000IS complies with the following standards:

Standard	Date	Title
FM Class 3600	2011	Electrical Equipment for Use in Hazardous (Classified) Locations, General Requirements
FM Class 3610	2010	Intrinsically Safe Apparatus and Associated Apparatus for Use in Class I, II and III, Division 1 and Class I, Zone 0 and 1 Hazardous (Classified) Locations
FM Class 3611	2004	Non-incendive Electrical Equipment for Use in Class I and II, Division 2 and Class III, Divisions 1 and 2 Hazardous (Classified) Locations
FM Class 3810 Including Supplement #1	2005 1995	Electrical Equipment for Measurement, Control, and Laboratory Use



Protection and Environment Reference:

The environmental rating is per ANSI/NFPA 70 National Electric Code® (NEC®) Article 500. The following is information excerpted from FM Approvals reference documents.

Protection Concepts

Type of Protection	Code	Permitted Use	Standard
Intrinsic Safety	(IS)	Class I, Division 1	FM Class 3610
Non-Incendive	(NI)	Class I, Division 2	FM Class 3611

Apparatus Grouping Per NEC® 500:

Class	Group	Typical Gas
I	A	Acetylene
	B	Hydrogen
	C	Ethylene
	D	Propane

Area Classification Per NEC® 500:

Division	Description
1	Flammable Material Present Continuously
	Flammable Material Present Intermittently
2	Flammable Material Present Abnormally

Temperature Class Per NEC® 500:

Temperature Class	Maximum Surface Temperature (of any component under fault conditions)
T4A	120 °C (with maximum 80 °C ambient)

NOTE: the T4A rating indicates the maximum surface temperature potentially encountered in a fault condition. **This is not the allowed operating temperature.** This temperature rating limits the maximum ambient temperature of 80°C.



6 Warner Road, Warner, NH 03278
Phone 603.456.2011 ♦ Fax 603.456.2012
www.madgetech.com ♦ support@madgetech.com