


PN7094



Pressure sensor with display

PN-010-RER14-QFRKG/US/ IV

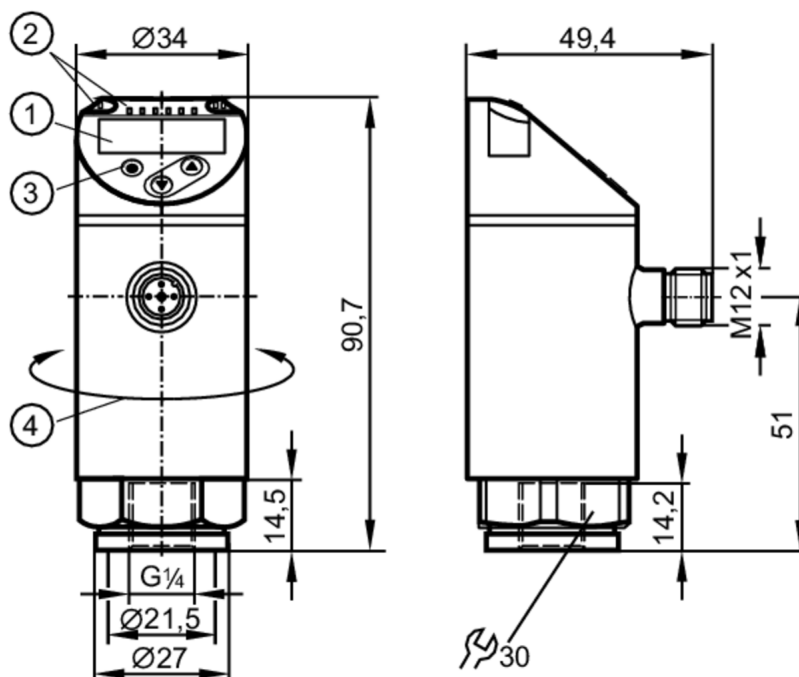

- 1 alphanumeric display 4-digit red/green
- 2 LEDs Display unit / Switching status
- 3 Programming button
- 4 upper part of the housing can be rotated 345°



Product characteristics

Number of inputs and outputs	Number of digital outputs: 2		
Measuring range	-1...10 bar	-14.5...145 psi	-0.1...1 MPa
Process connection	threaded connection G 1/4 Internal thread		

Application

System	gold-plated contacts		
Measuring element	ceramic-capacitive pressure measuring cell		
Application	for industrial applications		
Media	liquids and gases		
Medium temperature [°C]	-25...80		
Min. bursting pressure	150 bar	2175 psi	15 MPa
Pressure rating	75 bar	1087 psi	7.5 Mpa
Vacuum resistance [mbar]	-1000		
Type of pressure	relative pressure; vacuum		



Pressure sensor with display

PN-010-RER14-QFRKG/US/ IV

Electrical data			
Operating voltage	[V]	18...30 DC; (to SELV/PELV)	
Current consumption	[mA]	< 35	
Min. insulation resistance	[MΩ]	100; (500 V DC)	
Protection class		III	
Reverse polarity protection		yes	
Power-on delay time	[s]	< 0.3	
Integrated watchdog		yes	
Inputs / outputs			
Number of inputs and outputs		Number of digital outputs: 2	
Outputs			
Total number of outputs		2	
Output signal		switching signal; IO-Link; (configurable)	
Electrical design		PNP/NPN	
Number of digital outputs		2	
Output function		normally open / closed; (configurable)	
Max. voltage drop switching output DC	[V]	2.5	
Permanent current rating of switching output DC	[mA]	150; (200 (...60 °C) 250 (...40 °C))	
Switching frequency DC	[Hz]	< 170	
Short-circuit protection		yes	
Type of short-circuit protection		yes (non-latching)	
Overload protection		yes	
Measuring/setting range			
Measuring range		-1...10 bar	-14.5...145 psi -0.1...1 MPa
Factory setting / CMPT = 2			
Set point SP		-0.9...10 bar	-13.5...145 psi -0.09...1 MPa
Reset point rP		-0.95...9.95 bar	-14...144.5 psi -0.095...0.995 MPa
Min. difference between SP and rP		0.05 bar	1 psi 0.005 MPa
In steps of		0.05 bar	0.5 psi 0.005 MPa
Status_B High Resolution / CMPT = 3			
Set point SP		-0.92...10 bar	-13.3...145 psi -0.092...1 MPa
Reset point rP		-0.97...9.95 bar	-14...144.3 psi -0.097...0.995 MPa
Min. difference between SP and rP		0.05 bar	0.8 psi 0.005 MPa
In steps of		0.01 bar	0.1 psi 0.001 MPa
Accuracy / deviations			
Switch point accuracy		< ± 0,5	
	[% of the span]		
Repeatability	[% of the span]	< ± 0,1; (with temperature fluctuations < 10 K)	
Characteristics deviation		< ± 0,25 (BFSL) / < ± 0,5 (LS); (BFSL = Best Fit Straight Line; LS = limit value setting)	
	[% of the span]		
Hvsteresis deviation		< ± 0,25	



Pressure sensor with display

PN-010-RER14-QFRKG/US/ IV

	[% of the span]	
Long-term stability		$< \pm 0,05$; (per 6 months)
	[% of the span]	
Temperature coefficient zero point		$< \pm 0,2$; (0...80 °C)
	[% of the span / 10 K]	
Temperature coefficient span		$< \pm 0,2$; (0...80 °C)
	[% of the span / 10 K]	
Reaction times		
Response time	[ms]	< 3
Delay time programmable dS, dr	[s]	0...50
Software / programming		
Parameter setting options		hysteresis / window; normally open / closed; switching logic; switch-on/switch-off delay; Damping; Display unit
Interfaces		
Communication interface		IO-Link
Transmission type		COM2 (38,4 kBaud)
IO-Link revision		1.1
SDCI standard		IEC 61131-9
SIO mode		yes
Required master port class		A; (when pin 2 not connected: B)
Supported DeviceIDs	Type of operation	DeviceID
	Factory setting / CMPT = 2	403
	Status_B High Resolution / CMPT = 3	601
	PN7004	311
Note		For further information please see the IODD PDF file at "Downloads"
Factory setting / CMPT = 2		
Profiles		Smart Sensor: Process Data Variable; Device Identification, Device Diagnosis
Min. process cycle time	[ms]	2.3
IO-Link resolution pressure	[bar]	0.01
IO-Link resolution pressure	[MPa]	0.001
IO-Link process data (cyclical)	Function	bit length
	pressure	14
	binary switching information	2
IO-Link functions (acyclical)		application specific tag

PN7094



Pressure sensor with display

PN-010-RER14-QFRKG/US/ IV


Status_B High Resolution / CMPT = 3			
Profiles		Smart Sensor ED2: Digital Measuring Sensor (0x000A), Identification and Diagnosis (0x4000)	
Min. process cycle time [ms]		3	
IO-Link resolution pressure [bar]		0.005	
IO-Link resolution pressure [MPa]		0.0005	
IO-Link process data (cyclical)		Function	bit length
		pressure	16
		device status	4
		binary switching information	2
IO-Link functions (acyclical)		application specific tag	
Operating conditions			
Ambient temperature [°C]		-25...80	
Storage temperature [°C]		-40...100	
Protection		IP 65; IP 67	
Tests / approvals			
EMC		DIN EN 61000-6-2	
		DIN EN 61000-6-3	
Shock resistance		DIN EN 60068-2-27	50 g (11 ms)
Vibration resistance		DIN EN 60068-2-6	20 g (10...2000 Hz)
MTTF [years]		260	
UL approval		UL approval number	J001
Pressure equipment directive		sound engineering practice; can be used for group 2 fluids; group 1 fluids on request	
Mechanical data			
Weight [g]		241.7	
Material		stainless steel (1.4404 / 316L); PBT+PC-GF30; PBT-GF20; PC	
Materials (wetted parts)		stainless steel (1.4404 / 316L); ceramics; FKM	
Min. pressure cycles		100 million	
Tightening torque [Nm]		25...35; (recommended tightening torque; Depends on lubrication, seal and pressure rating)	
Process connection		threaded connection G 1/4 Internal thread	
Displays / operating elements			
Display		Display unit	3 x LED, green (bar, psi, MPa)
		Switching status	2 x LED, yellow
		Measured values	alphanumeric display, red/green 4-digit
Remarks			
Pack quantity		1 pcs.	
Electrical connection			
Connector: 1 x M12; Contacts: gold-plated			

PN7094




Pressure sensor with display

PN-010-RER14-QFRKG/US/ IV



Connection

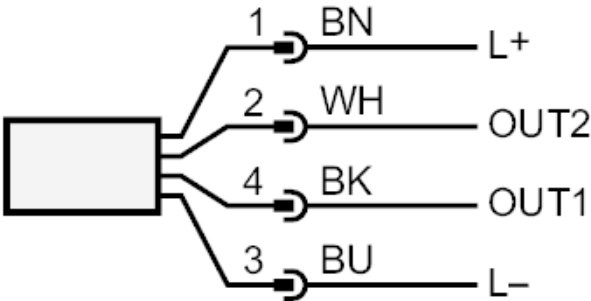

OUT1	Switching output IO-Link
OUT2	Switching output Colors to DIN EN 60947-5-2 Core colors :
BK =	black
BN =	brown
BU =	blue
WH =	white