

General Specifications

Model RAMC Metal Short-stroke Rotameter

GS 01R01B02-00E-E

A float is guided concentrically to a special shaped conic metal tube. The position of this float is magnetically transmitted to the indicator. The short-tube Rotameter is used for measurement of flow rates of liquids and gases. Its special application is in troubled, opaque or aggressive mediums. The instrument is mounted in a vertical pipeline with flow direction upwards. The indicators are exchangeable without influence on the accuracy.

FEATURES

- Different process connections like flanges according EN and ASME
- All wetted parts in stainless steel or PTFE
- Maximum flow 0.025 - 130 m³/h water resp. 0.75 - 1400 m³/h air (20 °C / 1.013 bar abs)
- Accuracy class 1.6 resp. 2.5 with lining acc. VDI/VDE 3513
- Float damping to avoid float bouncing with gas applications
- Optional heat tracing (with steam or fluid heat carrier)
- Indicator in stainless steel, aluminium or plastic, protection class IP66/67 or IP65
- Local indicator without additional power supply
- Microprocessor controlled transmitter with 24 V, 115 V or 230 V power supply
- Intrinsically safe version (Ex-i) (ATEX, FM/CSA, SAA, NEPSI)
- Flame proof version (Ex-d) (ATEX, NEPSI)
- Dust explosion proof (ATEX, NEPSI)
- Suitable for SIL application, FMEDA report on request
- Limit switches, also available as "Fail Safe" version

Electronic transmitter as standard with local-controlling display with the following features :

- Flow indication (totalize, actual, percent)
- Indication of different volume- and mass flow units
- Second (manual) calibration storing
- Patented float blocking indication function
- Signal output damping
- Error message indication
- Temperature measurement in the electronic transmitter
- HART- communication
- Profibus PA - communication

Contents	
Features	page 1
Standard Specifications	page 2
Hazardous Area Specifications	page 4
Installation	page 7
Model Specifications	page 11
Options	page 12
Process connection table for metal tubes	page 13
Flow tables metal tubes	page 14
Process connection and flow table for tubes with PTFE lining	page 15
Temperature graphs	page 16
Dimensions and weights	page 17



RAMC with housing type 90



RAMC with housing type 91

STANDARD SPECIFICATIONS

METERING TUBES

Materials of wetted parts :

- Stainless steel AISI 316L (1.4404)
- PTFE
- other materials on request

Fluids to be measured :

suitable for a variety of liquids, gas and steam

Measuring range :

see table 10 and 11

Measuring range ratio :

10:1

Process connections / Stainless steel :

- Flanges :
 - acc. EN1092-1
 - DN100 – DN150 PN16
 - DN15 – DN100 PN40
 - DN50 – DN80 PN63
 - DN15 – DN50 PN100
 - acc. ASME B 16.5
 - ½" – 6" Class 150 raised face
 - ½" – 6" Class 300 raised face
 - ½" – 3" Class 600 raised face
 - Roughness of sealing
 - Form B1 : RA 3.2 - 6.3
 - Form B2 : RA 0.8 - 3.2
 - ASME : RA 3.2 - 6.3
- Threaded connection :
 - male acc. DIN 11851
 - NPT- female
 - G- female
 - Clamp acc. DN25 / 1" – DN100 / 4"

Process pressure :

depends on process connection, see table 12 to 14
higher pressure (up to 700 bar) on request

Process temperature :

- medium wetted parts made of stainless steel
 - : -180 ... +370 °C
- medium wetted parts made of PTFE
 - : -80 ... +130 °C

Accuracy class :

Table 1

Material of wetted parts	Size	Accuracy class acc. VDE/VDI 3513 edition 12/1978	Standard flow accuracy full scale
SS	DN 15 - 100	1.6	+/- 1.6%
SS	DN 125 - 150	2.5	+/- 2.5%
PTFE	DN 15 - 100	2.5	+/- 2.5%

Pressure Equipment Directive (PED) Directive 97/23/EG :

- Tubes :
- Modul : H
 - Fluid Group : 1 (dangerous fluids)
 - Produced acc. to category : III
 - Classification : Table 6 (piping)

Heating (options /T1 to /T6) :

- Art. 3 section 3 : (Volume < 1L)
- Fluid Group : 2 (non-dangerous fluids)
- Classification : Table 2 (vessels)

CANADIAN REGISTRATION NUMBERS (CRN) available upon request

Installation :

- Mounting direction : vertical
- Flow direction : upwards
- Mounting length : see tables 12 to 15
- Straight pipe inlet length : DN 80/100 at least 5D, not necessary for smaller sizes

Weight :

see table 14

LOCAL INDICATOR

(Indicator/Transmitter Code -T)

Principle :

The indication is made by magnetic coupling of a magnet enclosed in the float and a magnet in the indication unit, which follows the movements of the float, with a pointer.

Indicator housing :

- Materials :
 - Stainless steel (1.4301)
 - painted aluminium casting
 - painted Polyamide with fiberglass each with safety-glass window
- Degree of protection :
 - IP65 (housing type 66)
 - IP66/67 (housing type 90 and 91)

Scales :

- Standard : removable aluminium plate with scale (double scale as option)
- Marking : direct readable units or percentage of Qmax.

Transportation- and Storage condition :

-40°C to +110°C

Process-/ Ambient temperature :

see fig. 6a to 6d

SIL- Compliance :

SIL 2: RAMC with local indicator and fail safe limit switches (-T[]NNN /K6 ... /K10). Type A component with hardware fault tolerance of zero.

ELECTRONIC TRANSMITTER

(Indicator/Transmitter Code -E, -H, -G)

Standard type (Code -E) :

Power supply :

- 4- wire units with galvanic isolation :
 - 230 V AC +10 %/-15 %, 50/60 Hz, fuse 0.063 A, time lag, (5x20) mm
 - 115 V AC +10 %/-15 %, 50/60 Hz, fuse 0.125 A, time lag, (5x20) mm
- 2/3- wire units : - U = 13.5 V... 30 V DC

Output signal :

- 4- wire units :
 - 0 - 20 mA, 4 – 20 mA
 - pulse output (option /CP) max. frequency 4 Hz see fig. 3
- 3- wire units : 0 - 20 mA, 4 - 20 mA
- 2- wire units : 4 - 20 mA

The 20 mA point is selectable between 60% and 100% of Qnom.

Load resistance :

- 4- wire units : ≤ 500 Ω
- 2/3- wire unit : ≤ (U-13.5 V)/20 mA

HART- communication type (Code -H) :

Power supply :

- 2-wire units : U = 13.5 V... 30 V DC

Output signal :

- 2- wire units : 4 – 20 mA

Load resistance :

- HART-version : 250 ... 500 Ω

Profibus PA - communication type (Code -G) :

- 2- wire bus connection not polarity sensitive : 9 ... 32V DC acc. to IEC 61568-2 and FISCO model
- Basic current : 14 mA
- Failure current (FDE) : 10mA additional to basic current
- Transmission rate : 31.25 kBaud
- AI block for volume flow or mass flow
- Configurable with PDM DD
- Supports I&M- functions

Digital display :

8- digits 7- segment-LC-display character height 6 mm

Process-/ Ambient temperature :

The dependency of the process temperature from the ambient temperature is shown in fig. 7a to fig. 7d.

The internal temperature of the electronic transmitter can be indicated on the display or checked via HART communication.

Measurement of the internal transmitter temperature :

- Range : -25 °C to +70 °C
- Accuracy : ± 5 °C

Transportation- and Storage condition :

-40 °C to +70 °C

Linearity ¹⁾ :

± 0.2 % f.s.

Hysteresis ¹⁾ :

± 0.1 % f.s.

Repeatability ¹⁾ :

± 0.1 % f.s.

Influence of power supply ¹⁾ :

± 0.1 % f.s.

Temperature coefficient of the output signal ¹⁾ :

± 0.5 %/10 K f.s.

AC-part of output signal ¹⁾ :

± 0.15 % f.s.

Long-time stability ¹⁾ :

± 0.2 % /year

Max. output signal :

21.5 mA

Output signal in case of failure :

≤ 3.6 mA (acc. NE 43)

Response time (99%) :

About 1.5 s (damping 1s)

Electromagnetic compatibility (EMC) :

- Emission acc. EN 55011: 2003 : class B, group 1
- EN 61000-3-2: 2001
- EN 61000-3-3: 2002
- Immunity acc. EN 61326: 2002 :
Criterion A, restriction: HF- immunity between 500 MHz and 750 MHz : criterion B
- RAMC with Profibus PA :
Criterion A: Burst, Surge, HF- Immunity
- Criterion B: ESD

In case of single sided grounding of the cable shield it is possible that for all tests criterion B is reached.

Unit safety acc. DIN EN 61010-1 : 2002 :

- Over voltage category : II (acc. VDE 0110 or IEC 664)
- Pollution degree : I
- Safety class : I (with 115 / 230V AC power supply)
III (with 24V DC power supply and
Fieldbus type)

SIL- Compliance :

SIL 1: RAMC with 4-20mA output (-E□□424 and -H□□424)
Type B component with hardware fault tolerance of zero.

POWER SUPPLY FOR ELECTRONIC TRANSMITTER (Option /U__)**Type :**

- power supply with galvanically separated input and output
- SINEAX B811, HART- compatible type available

Supply voltage :

- 24 V to 60 V AC/DC
- 85 V to 230 V AC

Maximum load :

750 Ω

Output signal :

0/4 mA - 20 mA

CABLE GLAND (for transmitter -E, -H and -G) :**Size :**

- M16x1.5 (standard)
- Thread M20x1.5 (option /A13; standard for option /KF1)
- Thread 1/2" NPT (option /A5)

Cable diameter :

6 – 9 mm

Maximum cross section of core :

$\varnothing 1.5$ mm²

LIMIT SWITCHES IN STANDARD VERSION

(option /K1 to /K3)

Type :

Inductive proximity switch SC3.5-NO acc. DIN EN 60947-5-6

Nominal voltage :

8 V DC

Output signal :

≤ 1 mA or ≥ 3 mA

LIMIT SWITCHES IN FAIL SAFE VERSION

(option /K6 to /K10)

Type :

Inductive proximity switch SJ3.5-SN; SJ3.5-S1N acc. DIN EN 60947-5-6 (NAMUR)

Nominal voltage :

8 V DC

Output signal :

≤ 1 mA or ≥ 3 mA

HYSTERESIS OF LIMIT SWITCHES**Min-contact :**

- pointer movement ≈ 0.5 mm
- float movement ≈ 0.8 mm

Max-contact :

- pointer movement ≈ 0.5 mm
- float movement ≈ 0.6 mm

CABLE GLAND (option /K1 to /K10)**Size :**

- M16x1.5 (standard)
- Thread M20x1.5 (option /A13; standard for option /KF1)
- Thread 1/2" NPT (option /A5)

Cable diameter :

6 – 9 mm

Maximum cross section of core :

$\varnothing 1.5$ mm²

¹⁾ referenced to 20°C ambient temperature

POWER SUPPLY FOR LIMIT SWITCHES (Option /W__)**Type :**

- acc. DIN EN 50227 (NAMUR)
- KFA5-SR2-Ex*-W (115 V AC), * = 1 or 2
- KFA6-SR2-Ex*-W (230 V AC), * = 1 or 2
- KFD2-SR2-Ex*-W (24 V DC), * = 1 or 2
- KHA6-SH-Ex1 (230 V AC), Fail Safe, 1 channel
- KFD2-SH-Ex1 (24 V DC), Fail Safe, 1 channel

Power supply :

- 230 V AC $\pm$ 10%, 45-65Hz
- 115 V AC $\pm$ 10%, 45-65Hz
- 24 V DC $\pm$ 25%

Relay output :

1 or 2 potential-free changeover contact(s)

Switching capacity :

max. 250V AC, max. 2 A

SWITCHING LEVELS FOR LIMIT SWITCHES**Table 2 Limit switch as Min, Max and Min-Max-contact in standard and fail-safe version.**

		SC3,5-N0		SJ3,5-SN		
Function	Pointer	Switch	Signal	Switch	Signal	Fail Safe
MAX	above LV	on	1mA	on	1mA	1mA
	below LV	off	3mA	off	3mA	
MIN	über LV	off	3mA	off	3mA	1mA
	unter LV	on	1mA	on	1mA	

Note: LV = Limit value

Table 3 Limit switch as Min-Min-contact in standard and fail-safe version.

		SJ3,5-SN		SJ3,5-S1N		
Function	Pointer	Switch	Signal	Switch	Signal	Fail Safe
upper MIN	above LV	----	----	off	3mA	1mA
	below LV	----	----	on	1mA	
lower MIN	über LV	off	3mA	----	----	1mA
	unter LV	on	1mA	----	----	

Note: LV = Limit value

Table 4 Limit switch as Max-Max-contact in standard and fail-safe version.

		SJ3,5-SN		SJ3,5-S1N		
Function	Pointer	Switch	Signal	Switch	Signal	Fail Safe
upper MAX	above LV	on	1mA	----	----	1mA
	below LV	off	3mA	----	----	
lower MAX	über LV	----	----	on	1mA	1mA
	unter LV	----	----	off	3mA	

Note: LV = Limit value

Note :

If 2 Fail-Safe limit switches option /K8 ... /K10 are used in a RAMC also 2 power supplies option /W2E or /W4E are necessary.

HAZARDOUS AREA SPECIFICATIONS**INTRINSIC SAFETY****Attention :**

The maximum ambient temperature of the transmitter or of the limit switches according to the temperature class may not be exceeded because of heat transmission from the medium.

Table 5 Entity parameters of electronic transmitter

	Ui[V]	Ii[mA]	Pi[W]	Ci[nF]	Li[mH]	Tamax [°C]
KS1/2	30	101	1.4	4.16	0.15	70
KN1	30	152	1.4	4.16	0.15	70
FS1	30	100	1.4	40	0.15	70
SS1	30	186	1.4	3.6	0.73	65 *)
NS1	30	101	1.4	4.16	0.15	70

*) with limit switches : 40°C

Intrinsically safe electronic transmitter 4 - 20mA (with/without HART-communication) with ATEX-certification (option /KS1) :**Certificate :**

PTB 96 ATEX 2160X

Output signal :

4-20 mA (2- wire unit, 3- wire unit) ; 0-20mA (3- wire unit)

Explosion proof :

Ex ia IIC T6; group II ; category 2G

Entity parameter :

see table 5

Intrinsically safe electronic transmitter Profibus PA - communication with ATEX- certification (option /KS1) :**Certificate:**

PTB 96 ATEX 2160X

Output signal :

Profibus PA

Explosion proof :

Ex ia IIB/IIC T4; group II ; category 2G

Table 6 Entity parameters

	IIC	IIB	FISCO IIB/IIC
Ui	24V	17,5V	acc.IEC 60079-27
Ii	250mA	280mA	
Li	negligible small	negligible small	
Ci	negligible small	negligible small	

Electronic transmitter 4 - 20mA (with/without HART-communication) type "n" (non incensive) acc. EN 60079-15 for category 3 (option /KN1) :**Output signal :**

4-20 mA (2- wire unit, 3- wire unit) ; 0-20mA (3- wire unit)

Explosion proof :

Ex nL IIC T6 protection „nL“; group II ; category 3G

Dust proof :

Ex II 3D; group II ; category 3D
Max. surface temperature : 80°C

Entity parameter :

see table 5

Intrinsically safe electronic transmitter with FM - certification (USA + Canada) (option /FS1) :

Certificate :

No. : 3027471

Output signal :

4–20 mA (2-wire unit)

Explosion proof :

Intrinsic safe Cl. I, Div. 1, GP. A, B, C, D T6

Intrinsic safe Cl. 1, Zone 0, AEx ia IIC T6

Non incandive Cl. I, Div. 2, GP. A, B, C, D T6

Entity parameter of electronic transmitter :

see table 5

Intrinsically safe RAMC with NEPSI- certification (China) (option /NS1) :

Certificate :

GYJ05152

Output signal :

4–20 mA (2- wire unit, 3- wire unit) ; 0-20mA (3- wire unit)

Explosion proof :

Ex ia IIC T6

Max. Tamb. :

70°C

Entity parameter of electronic transmitter :

see table 5

Limit switches :

option /K1 to /K10

Entity parameter of limit switches :

see certificate NEPSI GYJ06542X

Intrinsically safe RAMC with SAA- certification (Australia) (option /SS1) :

Certificate :

AUS Ex3777X

Output signal :

4–20 mA (2- wire unit)

Explosion proof :

Ex ia IIC T5

Max. Tamb. :

65°C (with limit switches 40°C)

Degree of protection :

IP54

Entity parameter of electronic transmitter :

see table 5

Limit switches :

option /K6 to /K10

Entity parameter of limit switches :

see certificate AUS Ex 02.3839X

Power Supply for the intrinsically safe electronic transmitter (option /U__)

Type :

Intrinsically safe power supply with galvanically separated input and output
- SINEAX B811, HART- compatible type available

Certificate :

PTB 97 ATEX 2083

Supply voltage :

- 24 V to 60 V AC/DC

- 85 V to 230 V AC

Maximum load impedance :

750 Ω

Output signal :

0/4 mA - 20 mA

Control circuit :

Intrinsically safe [EEx ia] IIC group II, category (1)G

Entity parameters :

see fig 4

Intrinsically safe and dust proof limit switches with ATEX-certification (option /K1 .. /K10 with /KS1) :

Certificate:

- PTB 99 ATEX 2219X (SC3.5-NO)

- PTB 00 ATEX 2049X (SJ 3.5-S.N)

- ZELM 03 ATEX 0128X (for dust proof)

Explosion proof :

EEx ia IIC T6, group II category 2G

Dust proof (only indicator "T") :

Ex iaD 20 T 108 °C, group II category 1D

Max. surface temperature : T108°C

Entity parameter :

see certificate of conformity

Limit switches for category 3 (option /K1 .. /K10 with /KN1):

Explosion proof :

EEx nL IIC T6 X protection „nL“; group II ; category 3G

Dust proof :

Ex II 3D; group II ; category 3D

Max. surface temperature : T112°C

Entity parameter :

see specification of SC3,5-N0 Blue (P&F)* (/K1 ... /K3)

see specification of SJ3,5-SN (P&F)* (/K6 ... /K10)

see specification of SJ3,5-S1N (P&F)* (/K6 ... /K10)

* P&F = Pepperl & Fuchs

Intrinsically safe limit switches with CSA-certification (USA + Canada) (option /K1 .. /K10 with /FS1):

Certificate :

1007121 (LR 96321-2)

Explosion proof :

Cl. I, Div. 1, Grp A, B, C, D

Cl. II, Div. 1, Grp. E, F, G

Cl. III, Div. 1 or

Class I, Zone 0, Gp. IIC T6 (Ta = 60°C)

Entity parameter :

see FM-control drawing 116-0165b / 116-0155

Power supply for intrinsically safe limit switches (option W__):

Type :

acc. DIN EN 50227 (NAMUR)

- KFA5-SR2-Ex*-W (115 V AC)

- KFA6-SR2-Ex*-W (230 V AC)

- KFD2-SR2-Ex*-W (24 V DC)

- KHA6-SH-Ex1 (230 V AC), Fail Safe, 1 channel

- KFD2-SH-Ex1 (24 V DC), Fail Safe, 1 channel

Certificates

- KFA5-SR2-Ex*-W: ATEX : PTB 00 ATEX 2081
CSA : 1029981 (LR 36087-19)

SAA : AUS Ex 3631X

- KFA6-SR2-Ex*-W: ATEX : PTB 00 ATEX 2081

CSA : 1029981 (LR 36087-19)

SAA : AUS Ex 3631X

- KHA6-SH-Ex1: ATEX : PTB 00 ATEX 2043

- KFD2-SR2-Ex*-W:ATEX : PTB 00 ATEX 2080

CSA : 1029981 (LR 36087-19)

SAA : AUS Ex 2244X

NEPSI : GYJ071116

- KFD2-SH-Ex1: ATEX : PTB 00 ATEX 2042

NEPSI : GYJ04443

Control circuit (ATEX) :

[EEx ia] IIC; group II ;

category (1)GD

Entity parameter :

see fig. 4 (ATEX) and certificate

Intrinsically safe electronic transmitter 4 - 20mA, with/without limit switches with ATEX- certification gas- and dust proof (option /KS2):

Certificate :

PTB 96 ATEX 2160X (Intrinsic safe electronic transmitter)
 PTB 99 ATEX 2219X (Intrinsic safe limit switch SC3.5-NO)
 PTB 00 ATEX 2049X (Intrinsic safe limit switch SJ 3.5-S.N)
 IBExU 05 ATEX 1086 (Dust proof)

Output signal electronic transmitter:

4–20 mA (2-wire unit, 3-wire unit) ; 0-20mA (3-wire unit)

Explosion proof :

Ex ia IIC T6; group II ; category 2G

Dust proof :

Group II ; category 1D
 Max. surface temperature TX : corresponding process temperature

Entity parameter :

see table 5 for electronic transmitter
 see certificates for limit switches

Housing :

Painted aluminium casting, type 91

Ambient temperature :

-20 °C to 60 °C (category 2G / 2D)
 -20 °C to 55 °C (category 1D)

Minimum process temperature :

-20°C

Threads for cable glands :

- M20x1.5 (standard)
 - ½" NPT (option /A5)

FLAME PROOF AND DUST PROOF RAMC

Flame proof and dust proof RAMC with ATEX- certificate (option /KF1):

Certificate :

IBExU 05 ATEX 1086

Flame proof :

Ex d IIC T1 ... T6 ; group II ; category 2G

Dust proof :

Ex tD A20 IP6X TX; group II ; category 1D/2D
 Max. surface temperature TX :corresp. process temperature

Housing :

Painted aluminium casting, type 91

Output signal (with electronic transmitter -E or -H) :

4–20 mA (2- wire unit, 3- wire unit) ; 0-20mA (3- wire unit)

Power supply (with electronic transmitter -E or -H) :

2- or 3- wire unit

Limit switches:

Options /K1 to /K10 possible

Ambient temperature :

-20 °C to 60 °C (category 2G / 2D)
 -20 °C to 55 °C (category 1D)

Minimum process temperature :

-20°C

Threads for cable glands :

- M20x1.5 (standard)
 - ½" NPT (option /A5)

Temperature classification :

Table 7

Temp. class	Max. Process temperature		
	No extension	On Extension	On extension with insulation
T6	85°C	85°C	85°C
T5	100°C	100°C	100°C
T4	120°C	135°C	135°C
T3	120°C	200°C	200°C
T2	120°C	300°C	300°C
T1	120°C	370°C	375°C

Flame proof and dust proof RAMC with NEPSI- certificate (China) (option /NF1) :

Certificate :

GYJ071430

Flame proof :

Ex d IIC T6

Dust proof :

DIP A20 TA T1 - T6 IP67

Max. surface temperature TA: corresponding process temperature

Housing :

Painted aluminium casting type 91

Output signal (with electronic transmitter -E or -H) :

4–20 mA (2- wire unit, 3- wire unit) ; 0-20mA (3- wire unit)

Power supply (with electronic transmitter -E or -H) :

2- or 3- wire unit

Limit switches :

Options /K1 to /K10 possible

Ambient temperature :

-20 °C to 60 °C
 -20 °C to 55 °C (for use in zone 20)

Minimum process temperature :

-20°C

Threads for cable glands :

- M16x1.5 (standard)
 - ½" NPT (option /A5)

Temperature classification :

see table 8

Table 8

Temp. class	Max. Process temperature		
	No extension	On Extension	On extension with insulation
T6	85°C	85°C	85°C
T5	100°C	100°C	100°C
T4	120°C	135°C	135°C
T3	120°C	200°C	200°C
T2	120°C	300°C	300°C
T1	120°C	370°C	375°C

INSTALLATION

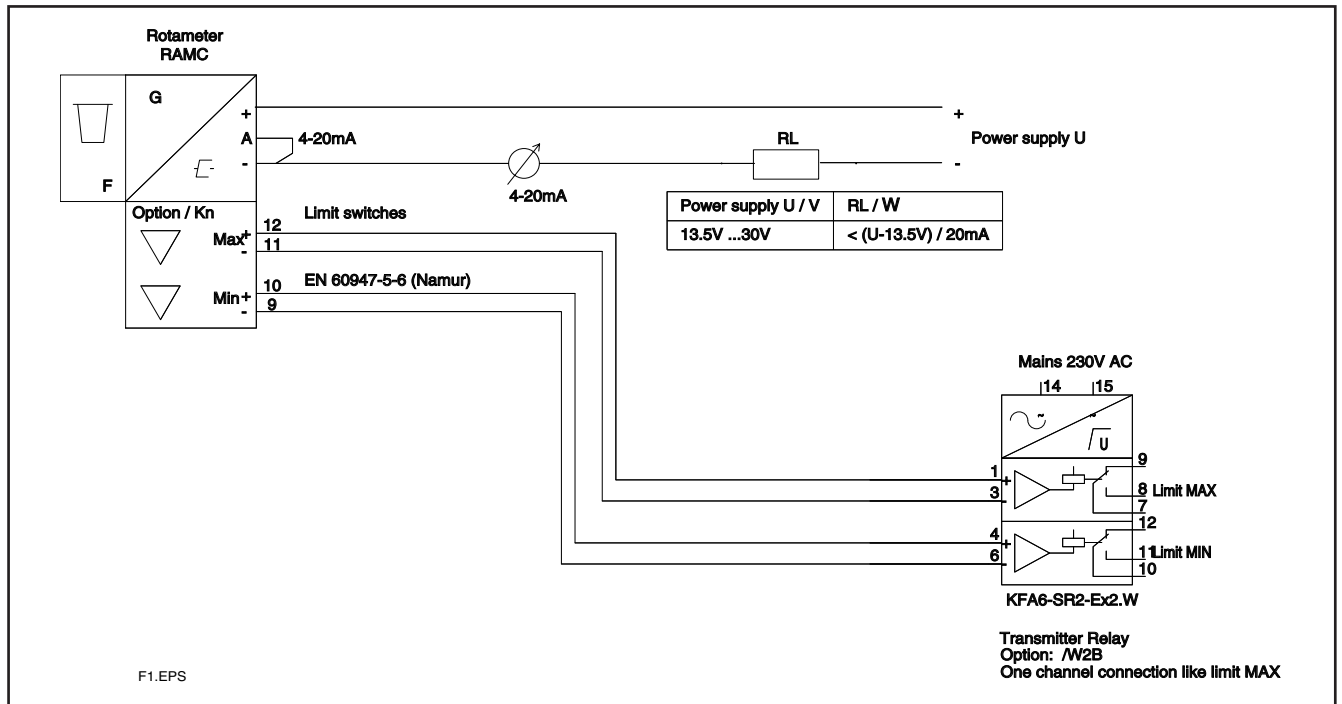


fig. 1 RAMC 2- wire unit with inductive limit switches and transmitter relay

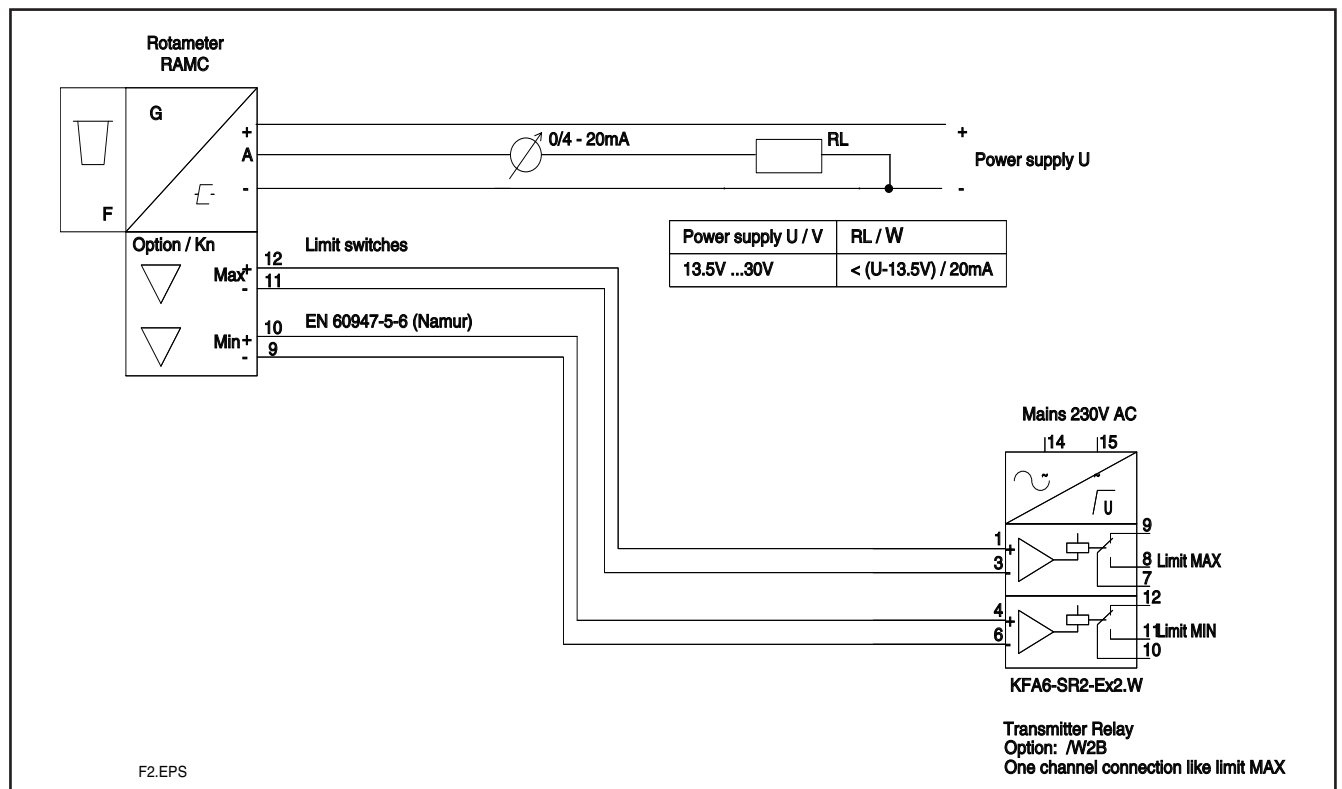


fig. 2 RAMC 3- wire unit with inductive limit switches and transmitter relay

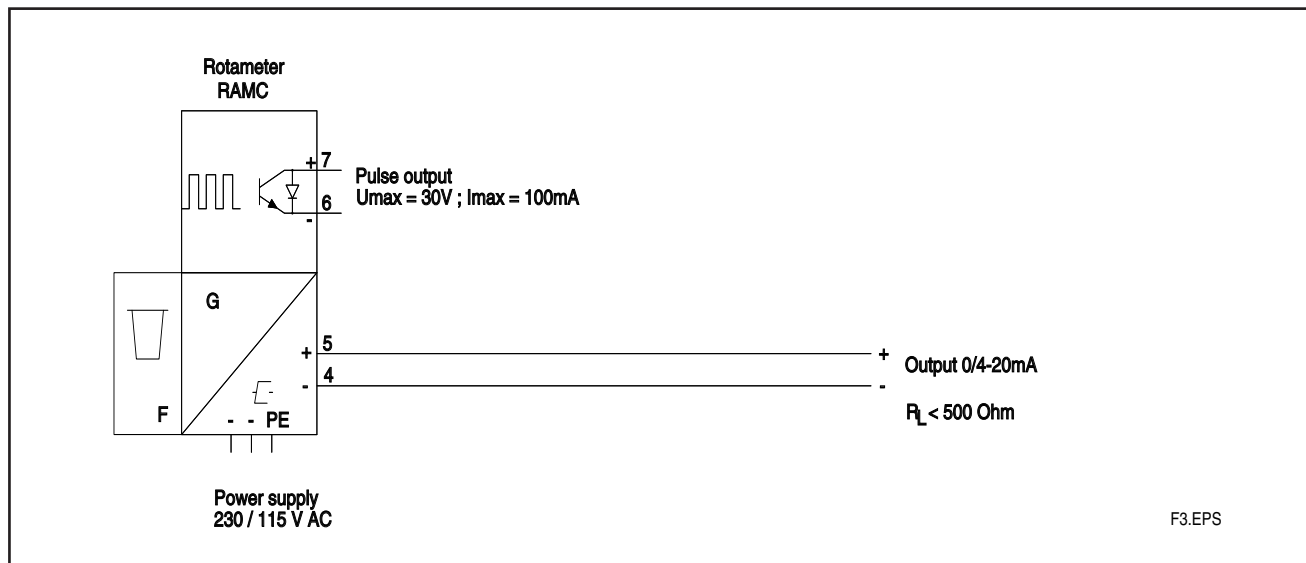


fig. 3 RAMC 4-wire unit with pulse output

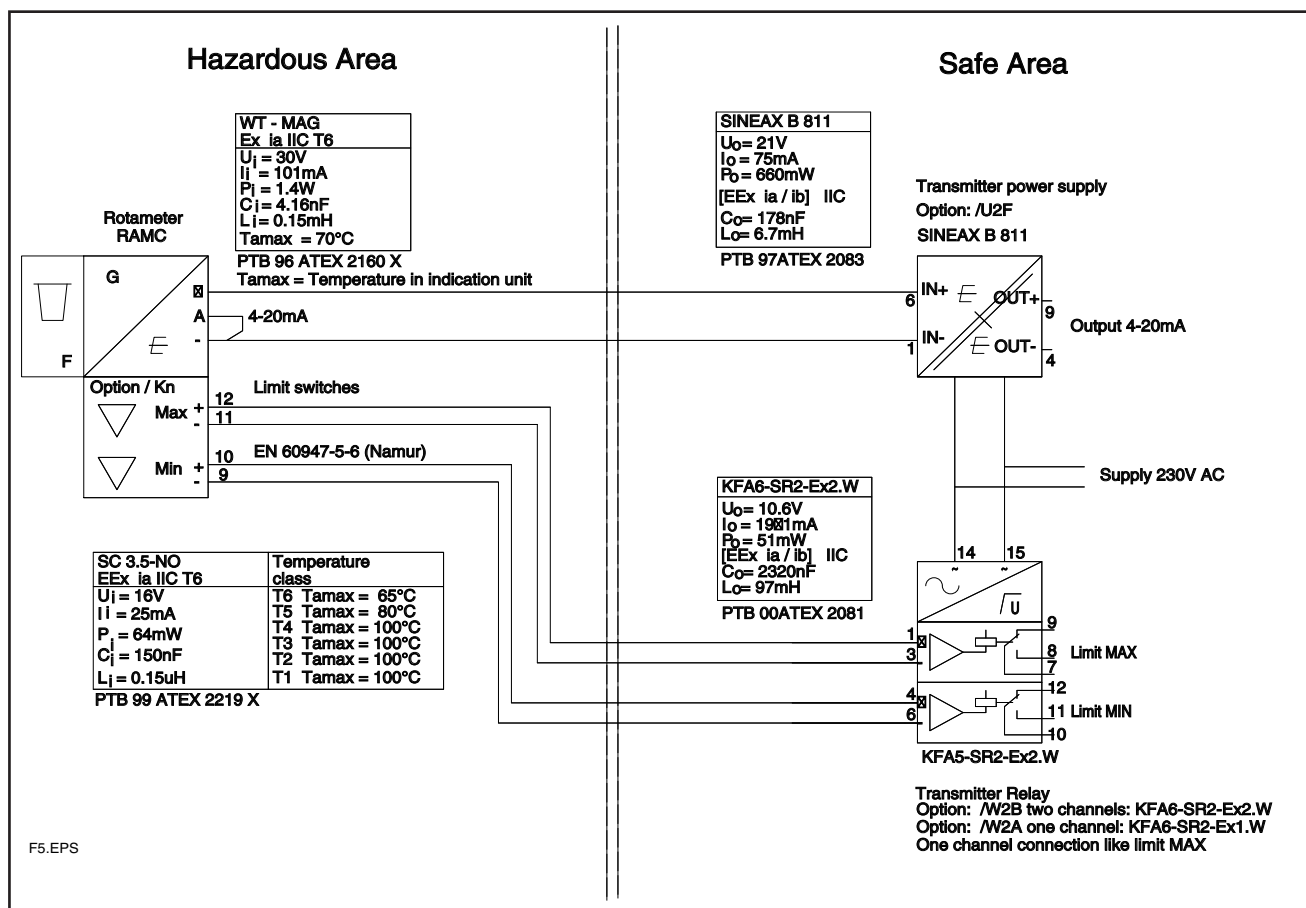


fig. 4 Intrinsic safe version according ATEX (option /KS1) : RAMC 2-wire unit with power supply, inductive limit switches and transmitter relay

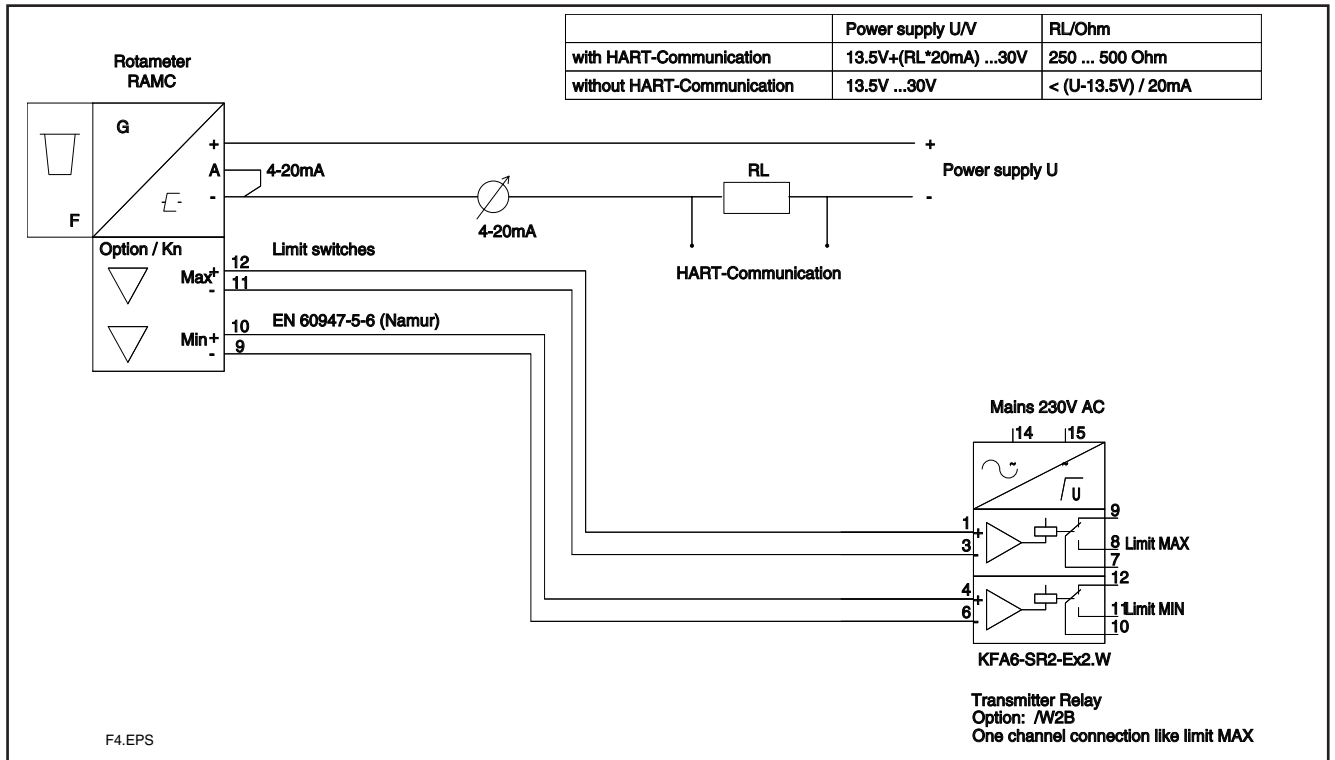


fig. 5 RAMC 2- wire unit with HART-communication, inductive limit switches and transmitter relay

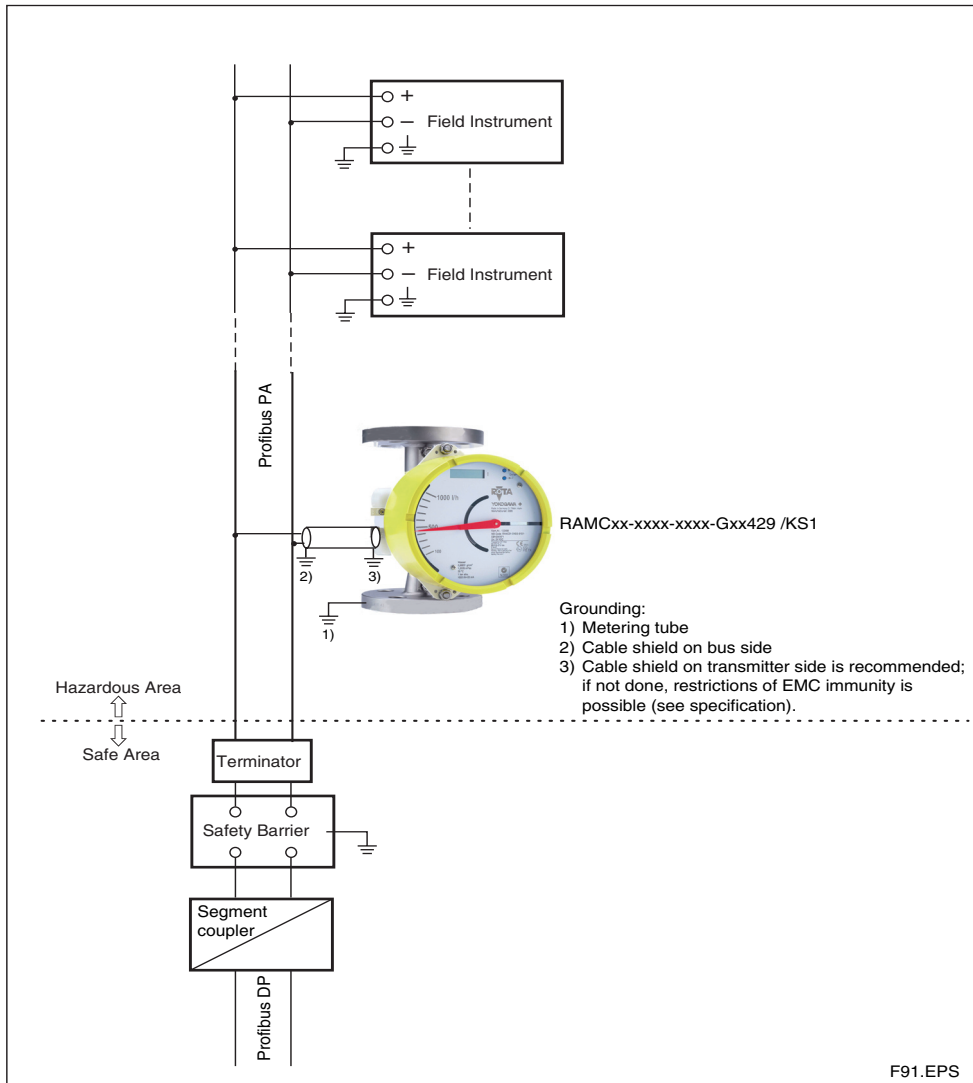


fig. 6 RAMC Profibus PA - communication

Planning and Installation Hints

- The user is responsible for the use of our flow meters regarding suitability and use as agreed.
- The actual operation pressure must be lower as the specified pressure limits of the Rotameter.
- Make sure that the wetted parts are resistant against the process medium.
- Ambient- and process temperature must be lower than the specified maximum values.
- If dirt accumulation is to be expected, we recommend to install a bypass pipe
- To avoid float bouncing in case of gas application notice the recommendations of VDI/VDE 3513 Sheet 3.
- To avoid mutual magnetic influence in case of parallel design of several Rotameters take care that the distance between the tube middle axes is not less than 300 mm. The distance to other ferric materials should not be less than 250 mm.
- Avoid static magnetic fields next to the Rotameter.

MODEL SPECIFICATIONS

Model	Suffix code	Option code	Description	Restrictions
RAMC01			Size DN 15 (½ inch)	for D4, D6, A1, A2, A3, T4, R4, T6, G6
RAMC23			Size DN 20 (¾ inch)	for D4, D6, A1, A2, A3, T4, R4, T6, G6
RAMC02			Size DN 25 (1 inch)	for D4, D6, A1, A2, A3, S2, S4, S5, T4, R4, T6, G6
RAMC03			Size DN 32 (1 ¼ inch)	for D4, D6, A1, A2, A3, S4, T6, G6
RAMC04			Size DN 40 (1 ½ inch)	for D4, D6, A1, A2, A3, S4, S5, T6, G6
RAMC05			Size DN 50 (2 inch)	for D4, D5, D6, A1, A2, A3, S2, S4, T4, R4
RAMC06			Size DN 65 (2 ½ inch)	for D4, D5, A1, A2, A3, S2, S4, T4, R4, T6, G6
RAMC08			Size DN 80 (3 inch)	for D4, D5, A1, A2, A3, S2, S4
RAMC09			3 ½ inch	for A1, A2
RAMC10			Size DN 100 (4 inch)	for D2, D4, A1, A2, S2, S4
RAMC12			Size DN 125 (5 inch)	for D2, A1, A2, S2
RAMC15			Size DN 150 (6 inch)	for D2, A1, A2
RAMCNN			Without measuring tube	
Process connection	-D2 -D4 -D5 -D6 -A1 -A2 -A3 -T6 -G6 -R4 -S2 -S4 -T4 -S5 -NN		EN flange PN 16, process connection dimensions + facing acc. EN1092 - 1 Form B1 EN flange PN 40, process connection dimensions + facing acc. EN1092 - 1 Form B1 EN flange PN 63, process connection dimensions + facing acc. EN1092 - 1 Form B2 EN flange PN 100, process connection dimensions + facing acc. EN1092 - 1 Form B2 ASME flange class 150, process connection dimensions + facing acc. ASME B16.5 ASME flange class 300, process connection dimensions + facing acc. ASME B16.5 ASME flange class 600, process connection dimensions + facing acc. ASME B16.5 Thread female NPT - PN40 Thread female G : PN40 Thread female Rp : removable Thread male DIN 11851 Triclamp PN10 ; PN16 Thread female NPT : removable Flanges Rosista PN10 Without process connection	
Material of wetted parts	SS PF NN		Stainless steel Teflon lining Without wetted parts	Only with RAMCNN
Cone / Float	-nnnn -NNNN		See tables 13 ... 15 Without measuring tube / without float	Only with RAMCNN
Indicator / Transmitter	-T -E -G -H -N		Indicator local Indicator electronic Indicator electronic with Profibus PA Indicator electronic HART Without indicator	Only with output 429 Only with output 424 Only with housing NN
Housing type	66 90 91 NN		Housing rectangular yellow : Polyamide Housing round blank : SS Housing round yellow : Al Without housing	Not with indicator G Only with indicator N
Power supply / Output	240 244 140 144 430 434 424 429 NNN		230 V AC : 4-wire : 0-20 mA 230 V AC : 4-wire : 4-20 mA 115V AC : 4-wire : 0-20 mA 115V AC : 4-wire : 4-20 mA 24V DC : 3-wire : 0-20 mA 24V DC : 3-wire : 4-20 mA 24V DC : 2-wire : 4-20 mA Profibus PA, 9 ... 32VDC Without power supply	Only with indicator E. Not with limit switches Only with indicator E. Not with limit switches Only with indicator E. Not with limit switches Only with indicator E. Not with limit switches Only with indicator E Only with indicator E Only with indicator E or H Only with indicator G. Not with limit switches Only with indicator T or N
Options		/[]	See separate table on next page	

T5.EPS

Specify the following when ordering :

- 1) Model, suffix code and option code
- 2) Fluid name ; Process temperature ; Process density ; Process pressure ; Process viscosity
- 3) For gases : Condition of the scale (st. or actual)
- 4) Options : Tag No. ; Customer specific notes

OPTIONS

Options	Option code	Description	Restrictions
Indicator	/A5 /A8 /A12 /A13 /A14 /A16 /A17 /A18	Thread for cable gland ASME 1/2" NPT female With scale for indicator US-engineering units Thread for cable gland ISO M20 x 1.5 female Housing colour green Indicator on 95mm extension Housing colour green Housing colour yellow	Not with option /A13 Only without indicator; Not with Ex-proof type Only for indicator E + H Not with options /A5, /NF1 Only for housing 66 + 91 Only for housing 90 + 91 Only for housing 90 Only for housing 90
Marking	/B0 /B1 /BT1 /BT2 /B4 /B8 /BG /BD	Tag plate (SS) on flange and marking on scale Tag plate (SS) fixed by wire and marking on scale Software Tag HART Software Tag, Bus address for Profibus PA Neutral version Customer provides marking on label Customer specific notes on scale Dual Scale	Plate 9 x 40 mm; max. 45 digits Plate 9 x 40 mm; max. 45 digits 8 digits for Tag, only indicator -H 22 digits for Long Tag, only indicator -H 32 digits for Tag, 4 digits bus address, only -G Not with option /P6 and Ex-proof type Max. 45 digits Adjustment only for the first mentioned fluid
Limit switches	/K1 /K2 /K3 /K6 /K7 /K8 /K9 /K10	MIN-contact MAX-contact MIN-MAX-contact; MIN-MIN-contact; MAX-MAX-contact MIN-contact "Fail Safe"- version MAX-contact "Fail Safe"- version MIN-MAX-contact "Fail Safe"- version MIN-MIN contact "Fail Safe"- version MAX-MAX-contact "Fail Safe"- version	Not for power supply 14n + 24n Not for power supply 14n + 24n Not for power supply 14n + 24n Not for power supply 14n + 24n Not for power supply 14n + 24n Not for power supply 14n + 24n Not for power supply 14n + 24n Not for power supply 14n + 24n
Pulse output	/CP	Pulse output, isolated	Only for power supply 14n + 24n
Facing (process connection)	/D10 /D11	EN raised face B2 : Ra 0.8 - 3.2 EN groove	Only for EN-flanges (D2;D4) Only for EN-flanges (D2;D4)
Ex-proof type	/KS1 /KS2 /KF1 /KN1 /FS1 /SS1 /NS1 /NF1	ATEX intrinsically safe "ia" ATEX intrinsically safe "ia" + dust proof ATEX flame proof "d" / dust proof ATEX category 3G "nL" / 3D FM intrinsically safe approval for electronic transmitter, CSA intrinsically safe approval for limit switches (USA and Canada) SAA approval (Australia) NEPSI intrinsically safe approval (China) NEPSI flame proof "d" / dust proof approval (China)	Only for power supply 424, 430, 434, 429; for indicator T only with limit switches Not for power supply 14n, 24n, 429; for indicator T only with limit switches; only for housing 91 Not for power supply 14n, 24n, 429; for indicator T only with limit switches; only for housing 91 Only for power supply 424, 430, 434; for indicator T only with limit switches Only for power supply 424; for indicator T only with limit switches Only for power supply 424; for indicator T only with limit switches /K6 to /K10; only for housing 90 Only for power supply 424, 430, 434; only for housing 90; for indicator T only with limit switches Not for power supply 14n, 24n, 429; for indicator T only with limit switches; only for housing 91
Test and certificates	/H1 /H3 /P2 /P3 /P6 /PM3 /PP /PT	Oil + fat free for wetted surfaces acc. ASTM G93-03, lev. C Certificate pure water application Certificate of Compliance with the order acc. to EN 10204: 2004- 2.1 As /P2 + Test report acc. to EN 10204: 2004- 2.2 Material certificate acc. to EN 10204: 2004- 3.1 PAMI test (3 test points: process connection inlet, metering tube, process connection outlet) Pressure test report measuring system Flowtable for conversion	Only for metallic pressurized parts; not for process connection R4 + T4 Only for SS material of wetted parts
GOST approvals	/QR1 /QR2	Russian GOST approval Kasachian GOST approval	
Damping	/SD	Float damping system	Only for stainless steel; not for cone 81 + 82; only for gas application
Heat tracing	/T1 /T2 /T3 /T4 /T5 /T6	Heat tracing, process connection R 1/4" Heat tracing, process connection DN15 PN40 Heat tracing, process connection DN25 PN40 Heat tracing, process connection ASME 1/2" 150# Heat tracing, process connection ASME 1" 150# Heat tracing, process connection 1/4" NPT female thread	Only for SS material of wetted parts Only for SS material of wetted parts Only for SS material of wetted parts Only for SS material of wetted parts Only for SS material of wetted parts Only for SS material of wetted parts
Power supply for electronic transmitter	/U2F /U3F /U2K /U3K	SINEAX B811, 85 - 250 V AC, EEx i SINEAX B811, 24 V AC/DC, EEx i SINEAX B811, 85 - 250 V AC, EEx i, HART compatible SINEAX B811, 24 V AC/DC, EEx i, HART compatible	Only for indicator E + H Only for indicator E + H Only for indicator E + H Only for indicator E + H
Power supply for limit switch(es) (transmitter relay)	/W1A /W1B /W2A /W2B /W2E /W4A /W4B /W4E	KFA5-SR2-Ex1.W / 115 V AC, 1 channel KFA5-SR2-Ex2.W / 115 V AC, 2 channels KFA6-SR2-Ex1.W / 230 V AC, 1 channel KFA6-SR2-Ex2.W / 230 V AC, 2 channels KHA6-SH-Ex1 / 230 V AC, 1 channel, Fail Safe KFD2-SR2-Ex1.W / 24 V DC, 1 channel KFD2-SR2-Ex2.W / 24 V DC, 2 channels KFD2-SH-Ex1 / 24 V DC, 1 channel, Fail Safe	Only for limit switches /K1 + /K2 + /K3 Only for limit switches /K1 + /K2 + /K3 Only for limit switches /K1 + /K2 + /K3 Only for limit switches /K1 + /K2 + /K3 Only for limit switches /K6 to /K10 Only for limit switches /K1 + /K2 + /K3 Only for limit switches /K1 + /K2 + /K3 Only for limit switches /K6 to /K10
Flange protection	/QK	Flange covers (flange EN)	Only for flange EN
Instruction manuals	/IE n /ID n /IF n	Quantity of instruction manuals in English Quantity of instruction manuals in German Quantity of instruction manuals in French	n = 1 to 9 selectable *) n = 1 to 9 selectable *) n = 1 to 9 selectable *) *) if no instruction manual is selected, only a CD with instruction manuals is shipped with the flowmeter

T6.EPS

PROCESS CONNECTION TABLE FOR METAL TUBES

Table 9

Process connection																																
Pos	EN-Flange										ASME-Flange						Male thread		Calamp		Female thread				Flange		Cone Float combination Code					
	Form B1			Form B2			with groove(Opt.: D11)				Form B2 (Opt.: D10)			150lbs		300lbs		600lbs		DIN11851 PN16/PN25/PN40		Clamp PN10/PN16		PN10-PN25		Female thread		Rosista PN10				
	PN16 Code	PN40 Code	L ⁽¹⁾ mm	PN63 Code	L ⁽¹⁾ mm	PN100 Code	L ⁽¹⁾ mm	PN16 Code	D2	D4	PN40 Code	L ⁽¹⁾ mm	PN16 Code	D2	D4	PN40 Code	L ⁽¹⁾ mm	A1	A2	A3	S2	S4	Code	L ⁽¹⁾ mm	NPT	Rp			Code	L ⁽¹⁾ mm	NPT	G
1	DN15 DN20 DN25 DN32 DN40 DN50	-	250	-	-	-	DN15 DN20 DN25 DN32 DN40 DN50	DN15 DN20 DN25 DN32 DN40 DN50	DN15 DN20 DN25 DN32 DN40 DN50	DN15 DN20 DN25 DN32 DN40 DN50	DN15 DN20 DN25 DN32 DN40 DN50	DN15 DN20 DN25 DN32 DN40 DN50	DN15 DN20 DN25 DN32 DN40 DN50	DN15 DN20 DN25 DN32 DN40 DN50	DN15 DN20 DN25 DN32 DN40 DN50	DN15 DN20 DN25 DN32 DN40 DN50	DN15 DN20 DN25 DN32 DN40 DN50	1/2" 3/4" 1" 1 1/4"	1/2" 3/4" 1" 1 1/4"	1/2" 3/4" 1" 1 1/4"	DN25 PN40	275	DN25 / 1" DN32 DN40 / 1 1/2" PN16	250	1/2" 3/4" PN25	295	1/2" PN40	295	DN25 PN10	250	43 S0 44 S0 47 S0 51 S0	
2	DN15 DN20 DN25 DN32 DN40 DN50	-	250	-	-	-	DN15 DN20 DN25 DN32 DN40 DN50	DN15 DN20 DN25 DN32 DN40 DN50	DN15 DN20 DN25 DN32 DN40 DN50	DN15 DN20 DN25 DN32 DN40 DN50	DN15 DN20 DN25 DN32 DN40 DN50	DN15 DN20 DN25 DN32 DN40 DN50	DN15 DN20 DN25 DN32 DN40 DN50	DN15 DN20 DN25 DN32 DN40 DN50	DN15 DN20 DN25 DN32 DN40 DN50	DN15 DN20 DN25 DN32 DN40 DN50	1/2" 3/4" 1" 1 1/4"	1/2" 3/4" 1" 1 1/4"	1/2" 3/4" 1" 1 1/4"	DN25 PN40	275	DN25 / 1" DN32 DN40 / 1 1/2" PN16	250	1/2" 3/4" PN25	295	3/4" 1" PN40	295	DN25 PN10	250	53 L1 ; 53 M1 53 S1 ; 54 L1 54 M1 ; 54 S1 57 L1 ; 57 M1 57 S1 ; 61 L1 61 M1 ; 61 S1 62 L1 ; 62 M1 62 V1		
3	DN25 DN32 DN40 DN50	-	250	DN50 270	DN25 DN32 DN40 DN50	DN25 DN32 DN40 DN50	DN25 DN32 DN40 DN50	DN25 DN32 DN40 DN50	DN25 DN32 DN40 DN50	DN25 DN32 DN40 DN50	DN25 DN32 DN40 DN50	DN25 DN32 DN40 DN50	DN25 DN32 DN40 DN50	DN25 DN32 DN40 DN50	DN25 DN32 DN40 DN50	DN25 DN32 DN40 DN50	1" 1 1/4" 1 1/2" 2"	1" 1 1/4" 1 1/2" 2"	1" 1 1/4" 1 1/2" 2"	DN50 PN25	275	DN50 / 2" PN16	250	1" PN16	310	1 1/4" 1 1/2" PN40	310	DN40 PN10	250	63 L2 ; 64 L2 63 M2 ; 64 M2 63 S2 ; 64 S2 64 V2		
4	DN50 DN65 DN80 DN100	DN50 DN65 DN80 DN100	260 250	DN50 DN65 DN80 DN100	DN50 DN65 DN80 DN100	DN50 DN65 DN80 DN100	DN50 DN65 DN80 DN100	DN50 DN65 DN80 DN100	DN50 DN65 DN80 DN100	DN50 DN65 DN80 DN100	DN50 DN65 DN80 DN100	DN50 DN65 DN80 DN100	DN50 DN65 DN80 DN100	DN50 DN65 DN80 DN100	DN50 DN65 DN80 DN100	DN50 DN65 DN80 DN100	2" 2 1/2" 3"	2" 2 1/2" 3"	2" 2 1/2" 3"	DN65 DN80 PN25	275	DN65 / 3" PN10	300	2" 2 1/2" PN10	325	2 1/2" PN40	325	-	-	67 L5 ; 67 M5 67 S5 ; 71 L5 71 M5 ; 71 S5 72 L5 ; 72 M5 72 S5 ; 72 V5		
5	DN100 DN125(2) DN150(2)	DN100 DN125(2) DN150(2)	250	DN100 DN125(2) DN150(2)	DN100 DN125(2) DN150(2)	DN100 DN125(2) DN150(2)	DN100 DN125(2) DN150(2)	DN100 DN125(2) DN150(2)	DN100 DN125(2) DN150(2)	DN100 DN125(2) DN150(2)	DN100 DN125(2) DN150(2)	DN100 DN125(2) DN150(2)	DN100 DN125(2) DN150(2)	DN100 DN125(2) DN150(2)	DN100 DN125(2) DN150(2)	DN100 DN125(2) DN150(2)	3" 3 1/2" 4" 5(2) 6(2)	3" 3 1/2" 4" 5(2) 6(2)	3" 3 1/2" 4" 5(2) 6(2)	DN100 PN25	300	DN100 / 4" PN10	250	-	-	-	-	-	-	73 L8 ; 73 V8 74 L8 ; 74 V8 77 L8 ; 77 V8		
6	DN100 DN125(2) DN150(2)	DN100 DN125(2) DN150(2)	250	DN100 DN125(2) DN150(2)	DN100 DN125(2) DN150(2)	DN100 DN125(2) DN150(2)	DN100 DN125(2) DN150(2)	DN100 DN125(2) DN150(2)	DN100 DN125(2) DN150(2)	DN100 DN125(2) DN150(2)	DN100 DN125(2) DN150(2)	DN100 DN125(2) DN150(2)	DN100 DN125(2) DN150(2)	DN100 DN125(2) DN150(2)	DN100 DN125(2) DN150(2)	DN100 DN125(2) DN150(2)	4" 5(2) 6"	4" 5(2) 6"	4" 5(2) 6"	DN125 PN16	300	-	-	-	-	-	-	-	-	81 11 82 11		

(1) L = face to face length

(2) Accuracy class 2.5 instead 1.6

FLOW TABLES FOR METAL TUBES

Table 10

Pos.	Measuring ranges for water and liquids						Measuring ranges for air and gases					
	recommended combination			Alternative combination			recommended combination			Alternative combination		
	Max. Flow		pressure loss a)	viscosity b)	Cone / Float combination	Code	Max. Flow		pressure loss a)	Cone / Float combination	Code	pressure loss a)
	m ³ /h ^{c)}	gpm ^{d)}					m ³ /h ^{c)}	m ³ /h i. N. ^{e)}				
1	0.025	0.11	40	10	-	-	0.75	0.7	45	43 S0	-	-
	0.04	0.18	40	80	-	-	1.2	1.1	45	44 S0	-	-
	0.063	0.28	40	80	-	-	1.8	1.7	45	47 S0	-	-
	0.1	0.45	40	80	-	-	3	2.8	45	51 S0	-	-
	0.13	0.55	12	50	-	-	4	3.6	13	53 L1	-	-
2	0.16	0.7	-	-	53 M1	-	5.5	5.0	-	-	53 M1	21
	0.22	0.5	12	50	-	-	-	-	-	-	-	-
	0.25	1.12	40	100	54 M1	15	6.5	6.0	13	54 L1	-	-
	0.32	1.4	-	-	57 L1	12	9	8.5	-	-	54 M1	21
	0.4	1.8	40	50	57 M1	15	10	9.0	13	57 L1	-	-
	0.5	2.2	-	-	61 L1	12	14	13	-	-	57 M1	21
	0.63	2.8	40	50	61 M1	15	16	15	13	61 L1	-	-
	0.8	3.5	-	-	62 L1	12	22	20	-	-	61 M1	21
	1.0	4.5	40	100	62 M1	15	25	23	13	62 L1	-	-
	1.6	7.0	40	100	-	-	34	32	-	-	62 M1	21
	2.3	10.4	-	-	62 V1	45	50	45	-	-	62 S1	45
	1.3	5.7	17	50	-	-	40	36	19	63 L2	-	-
3	2.1	9.2	-	-	64 L2	17	50	47	-	-	63 M2	23
	2.5	11.2	42	30	64 M2	17	60	55	19	64 L2	-	-
	4	18	42	10	-	-	85	80	-	-	64 M2	23
	6	27	-	-	64 V2	43	120	110	-	-	64 S2	47
	3.2	14	13	20	-	-	100	90	16	67 L5	-	-
4	5.0	22	-	-	71 L5	13	130	120	-	-	67 M5	25
	6.3	28	47	30	-	-	160	150	16	71 L5	-	-
	8.5	37	-	-	72 L5	13	200	180	-	-	71 M5	25
	10	45	47	5	72 M5	19	250	230	16	72 L5	-	-
	16	70	47	5	-	-	340	320	-	-	72 M5	25
	25	110	-	-	72 V5	63	500	470	-	-	72 S5	54
	25	110	60	10	-	-	550	500	30	73 L8	-	-
5	40	180	60	10	-	-	850	800	30	74 L8	-	-
	63	280	60	10	-	-	1400	1300	30	77 L8	-	-
6	100	450	70	10	-	-	-	-	-	-	-	-
	130	570	70	10	-	-	-	-	-	-	-	-

a) Pressure loss at the float with water or air.

b) For higher viscosity the specified precision is no more guaranteed.

c) Flow is referred to 20°C and 1 bar abs

d) Flow in US Gallons per minute at 70°F

e) Flow referred to 0°C and 1.013 bar abs at operation conditions of 20°C and 1.013 bar abs

f) Flow in Standard cubic feet per minute referred to 60°F and 14.7PSI at operation conditions of 70°F und 14.7 PSI abs

For your special application please use the Rota Yokogawa Sizing-Program

T8.EPS

PROCESS CONNECTION- AND FLOW-TABLE FOR TUBES WITH PTFE LINING

Table 11

Pos.	Process connection				Measuring range for Water / Liquids				Measuring range for Air / Gases			
	EN-Flange		ASME-Flange		Max. Flow		Cone / Float combination		Max. Flow		Cone / Float combination	
	PN 16	Code	L ⁽¹⁾	Code	m ³ /h ^{c)}	gpm ^{d)}	Code	Pressure Loss ^{a)} mbar	m ³ /h ^{c)}	m ³ /h i. N. ^{e)}	Code	Pressure loss ^{a)} mbar

Pos.	Process connection				Measuring range for Water / Liquids				Measuring range for Air / Gases			
	EN-Flange		ASME-Flange		Max. Flow		Cone / Float combination		Max. Flow		Cone / Float combination	
	PN 16	Code	L ⁽¹⁾	Code	m ³ /h ^{c)}	gpm ^{d)}	Code	Pressure Loss ^{a)} mbar	m ³ /h ^{c)}	m ³ /h i. N. ^{e)}	Code	Pressure loss ^{a)} mbar

Pos.	Process connection				Measuring range for Water / Liquids				Measuring range for Air / Gases			
	EN-Flange		ASME-Flange		Max. Flow		Cone / Float combination		Max. Flow		Cone / Float combination	
	PN 16	Code	L ⁽¹⁾	Code	m ³ /h ^{c)}	gpm ^{d)}	Code	Pressure Loss ^{a)} mbar	m ³ /h ^{c)}	m ³ /h i. N. ^{e)}	Code	Pressure loss ^{a)} mbar

Bold = recommended

⁽¹⁾ L = Mounting length

a) Pressure loss at the float with water or air.

b) As from this viscosity the specified precision is no more guaranteed.

c) Flow is referred to 20°C and 1 bar abs

d) Flow in US Gallon per minute at 70°F

e) Flow referred to 0°C and 1,013 bar abs at operation conditions of 20°C and 1,013 bar abs

f) Flow in Standard cubicfeet per minute referred to 60°F and 14,7 PSI at operation conditions of 70°F und 14,7 PSI abs

For your special application please use the Rota Yokogawa Sizing-Program

T9.EPS

TEMPERATURE GRAPHS FOR RAMC METAL DESIGN, STANDARD AND INTRINSIC SAFE

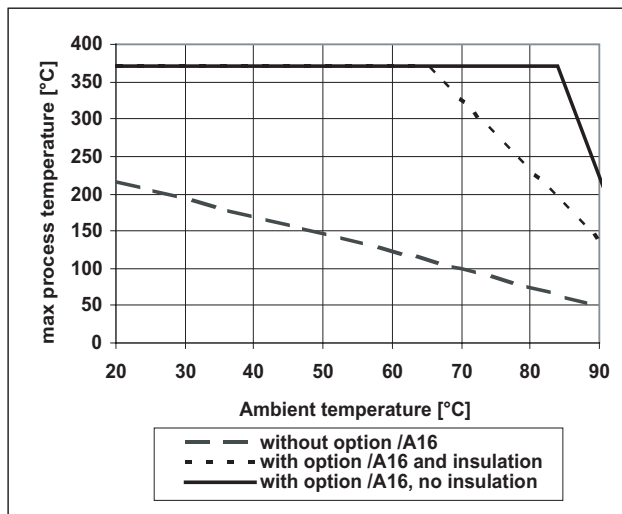


fig. 7a RAMC : - type 90 / 91
- only with indicator

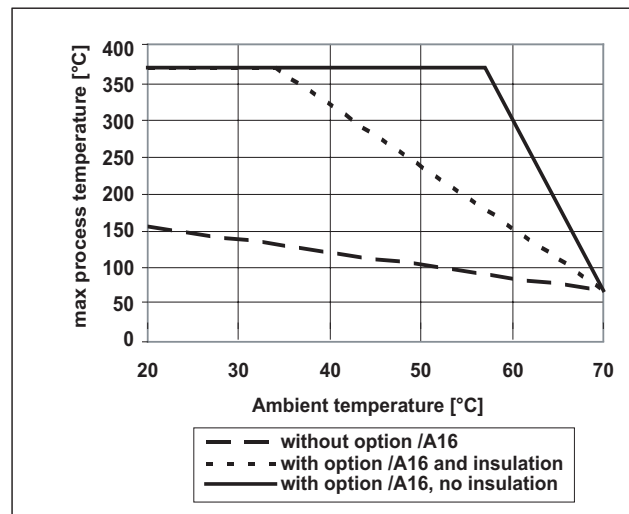


fig. 7b RAMC : - type 90 / 91
- with limit switches
- with electronic transmitter

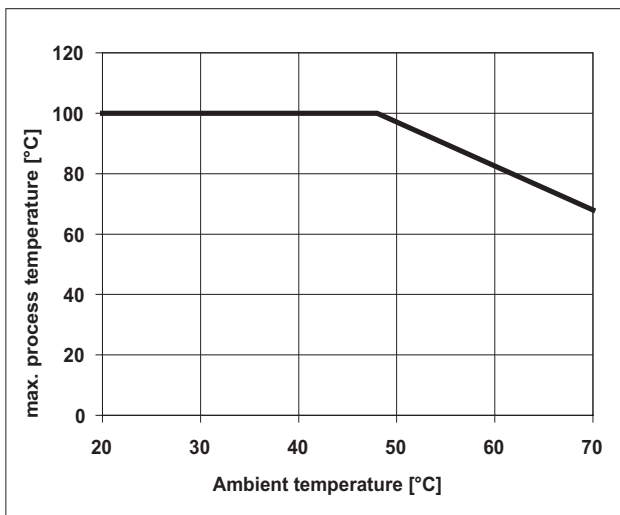


fig. 7c RAMC : - type 66
- with or without limit switches
- with or without electronic transmitter

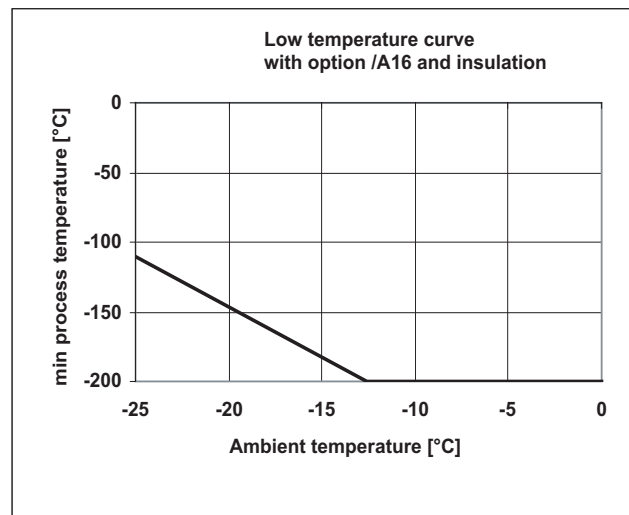


fig. 7d RAMC : - type 90 / 91
- with or without limit switches
- with or without electronic transmitter

T10.EPS

The temperature graphs are reference values for size DN100. They may be influenced negative by trapped heat, external heat sources or radiated heat and influenced positive for smaller sizes.

Insulation means rock wool between tube and indicator.

Units with electronic transmitter can show the temperature of the internal transmitter on the display or HART-type can show and supervise the internal temperature by HART-communication.

Units with PTFE lining are usable up to 130°C.

For units with explosion proof certification the temperature limits according the certificate of conformity must be regarded (see also page 4 to 6).

The minimum ambient temperature for indicators is -25°C except units with option /KF1 and /KS2 (lower temperatures on request).

DIMENSIONS AND WEIGHTS

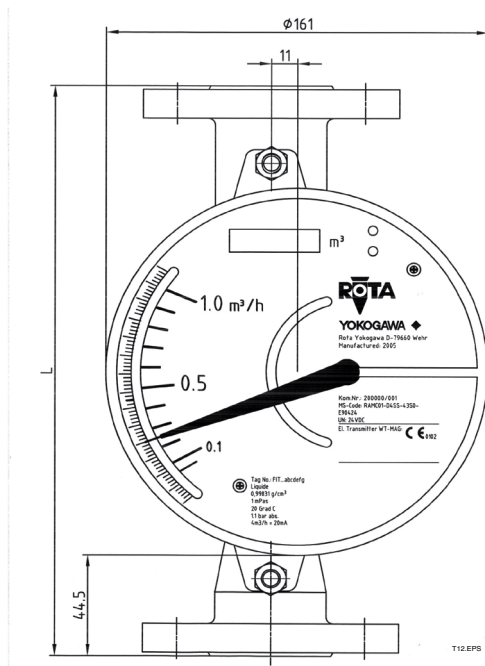


fig. 8a Front view housing type 90

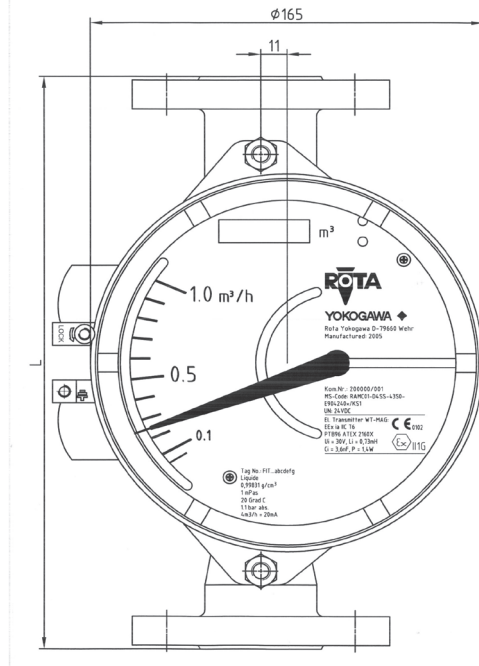


fig. 8b Front view housing type 91

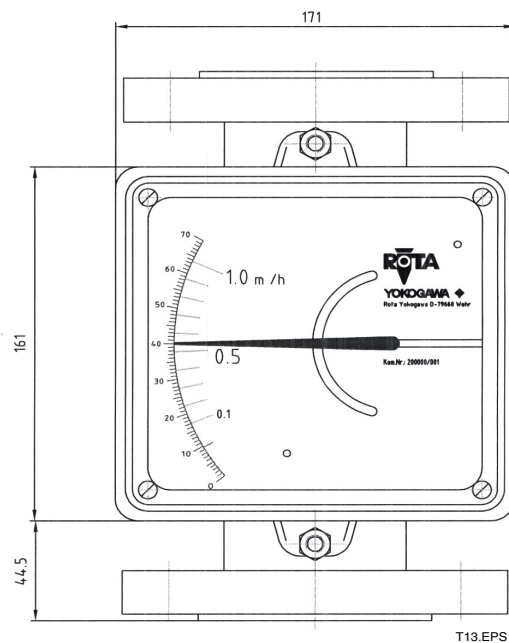


fig. 8c. Front view housing type 66

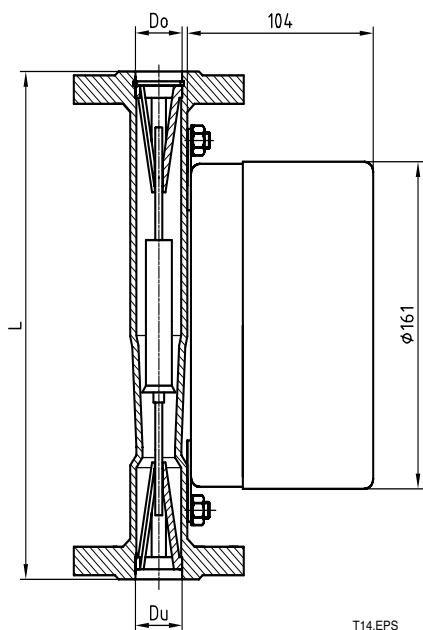


fig. 9 Metal version

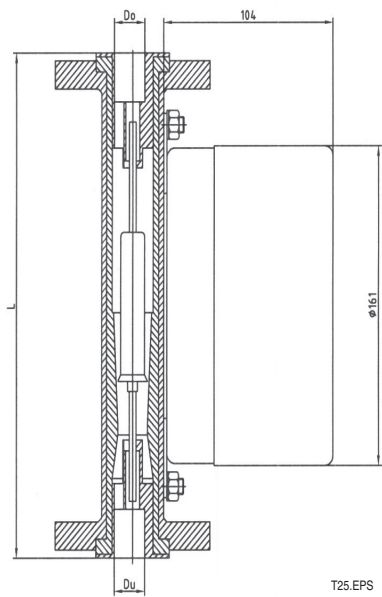


fig. 10 Metal version with lining

Table 12

Inner diameter of stainless steel flanges								Inner diameter of flanges with PTFE- lining			
Pos. ¹⁾	EN-flange without groove			ASME-flange			Rosita-flange	Pos. ¹⁾	EN- flange	ASME-flange	
	Size	Du mm	Do mm	Size	Du mm	Do mm	Du=Do mm		Size	Size	Du = Do mm
1	DN15-DN50	20.7	20.7	½'' - 1''	20.7	20.7	20.7	----	----	----	----
2	DN15-DN50	29.5	29.5	½''	20.7	20.7	29.5	2	DN15-DN25	¾'' - 1''	23.5
				¾'' - 2''	29.5	29.5					
3	DN25-DN50	45.2	45.2	1''	32.2	32.2	45.2	3	DN25-DN50	1¼'' - 1½	36.0
				1¼'' - 2''	45.2	45.2					
4	DN50-DN100	62.0	76.0	2''	62.0	65.5	-----	4	DN50-DN80	2½'' - 3''	66.0
				2½'' - 3''	62.0	76.0					
5	DN80-DN150	94.0	94.0	3'' - 6''	94.0	94.0	-----	5	DN80-DN100	3½'' - 4''	82.0
6	DN100-DN150	116.0	116.0	4'' - 6''	116.0	116.0	-----	6	DN100	4''	110.0

¹⁾ see table 9, 10, 11

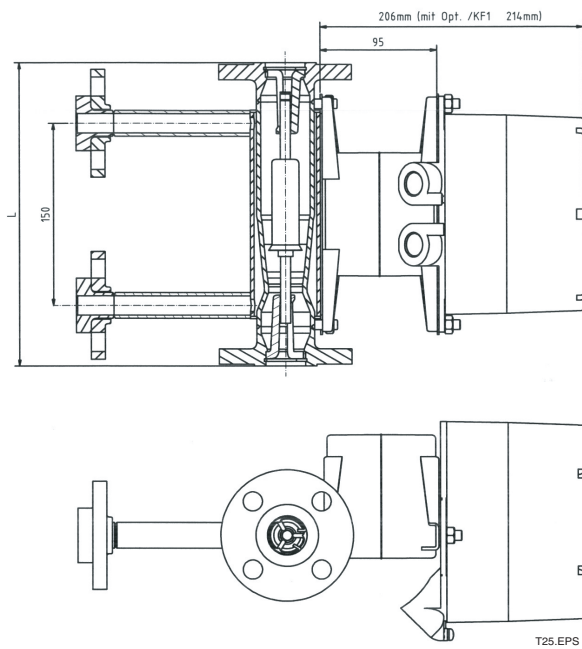


fig. 11 RAMC type 91 and Option /A16 and T2

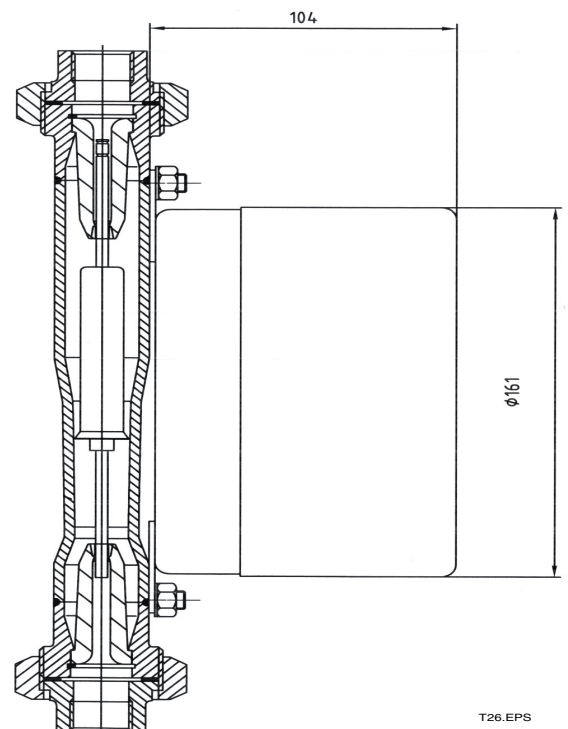


fig. 12 RAMC with connection R4/ T4

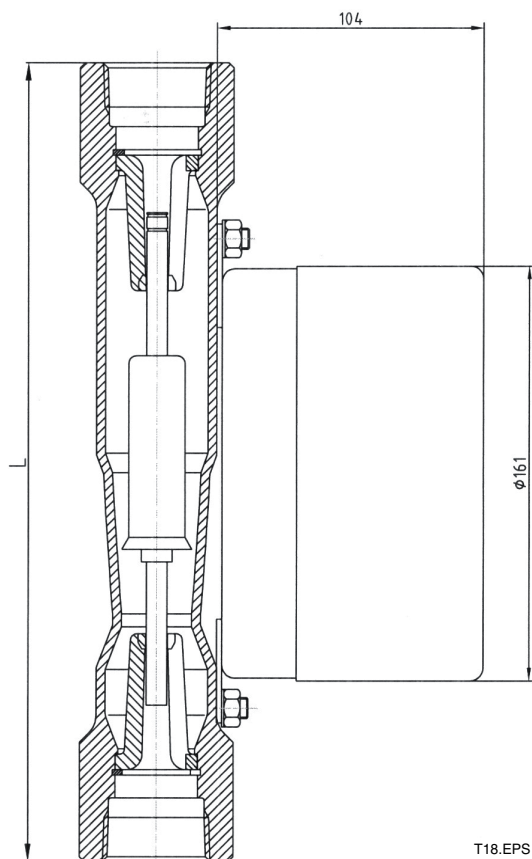


fig. 13 RAMC with connection T6/ G6

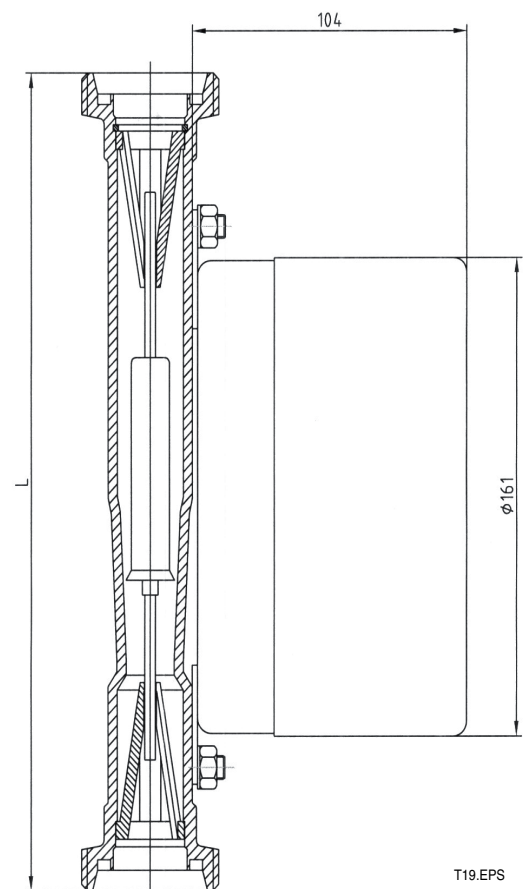


fig. 14 RAMC with connection S2

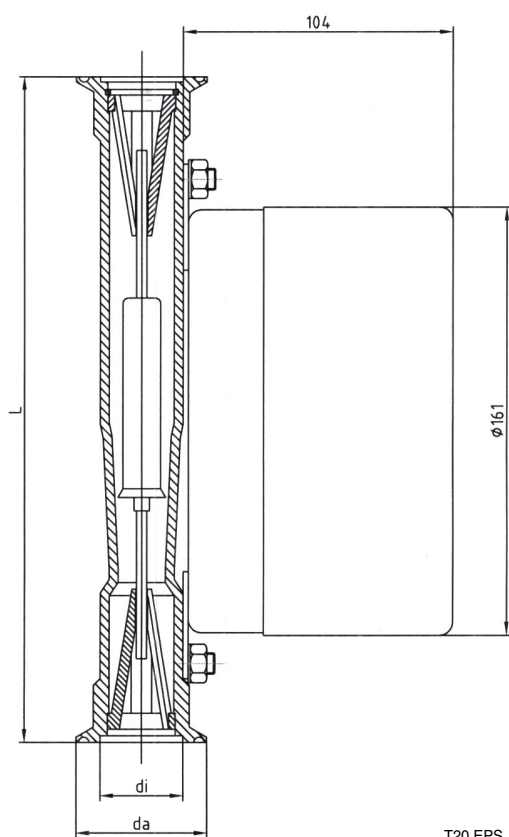


fig. 15 RAMC with connection S4

Table 13 Diameter for connection sizes S4

Position *)	Size [mm]	di [mm]	da [mm]
1	DN25 / 1"	36	50.5
	DN32	36	50.5
	DN40 / 1 1/2"	36	50.5
2	DN25 / 1"	36	50.5
	DN32	36	50.5
	DN40 / 1 1/2"	36	50.5
3	DN50 / 2"	47.8	64
4	DN65 / 3"	72.1	91
5	DN100 / 4"	97.6	119

*) see table 9, 10, 11

Table 14 Weights

Position *)	Weight [kg]
1	3 - 5
2	3 - 5
3	6.5 - 8
4	8.6 - 11
5	13 - 16
6	17 - 20

*) see table 9, 10, 11

Indicator on distance (option /A16) additional 1kg

YOKOGAWA HEADQUARTERS
 9-32, Nakacho 2-chome,
 Musashinoshi
 Tokyo 180
 Japan
 Tel. (81)-422-52-5535
 Fax (81)-422-55-1202
 E-mail: webinfo@mls.yokogawa.co.jp
 www.yokogawa.com

YOKOGAWA EUROPE B.V.
 Databankweg 20
 3821 AL AMERSFOORT
 The Netherlands
 Tel. +31-33-4641 611
 Fax +31-33-4641 610
 E-mail: info@nl.yokogawa.com
 www.yokogawa.com/eu

YOKOGAWA CORPORATION OF AMERICA
 2 Dart Road
 Newnan GA 30265
 United States
 Tel. (1)-770-253-7000
 Fax (1)-770-251-2088
 E-mail: info@yca.com
 www.yca.com

YOKOGAWA ELECTRIC ASIA Pte. Ltd.
 5 Bedok South Road
 Singapore 469270
 Singapore
 Tel. (65)-241-9933
 Fax (65)-241-2606
 E-mail: webinfo@yas.com.sg
 www.yokogawa.com.sg

Yokogawa has an extensive sales and distribution network. Please refer to the European web-site (www.yokogawa-europe.com) to contact your nearest representative.

Manufactured by:
 ROTA YOKOGAWA
 Rheinstr. 8
 D-79664 Wehr
 Germany



YOKOGAWA ◆