

Product availability : Stock - Normally stocked in distribution facility

Price* : 2012.00 USD



Main

Range of product	Modicon TSX Micro automation platform
Product or component type	Modular base controller
Primary voltage	24 V 19.2...30 V DC
Input current	2 mA < 60 A
Immunity to microbreaks	< 10 ms

Complementary

Number of slots	2
Module type	HE10 connector discrete I/O
Discrete input number	32 24 V DC
Discrete output number	32 solid state
Integrated connection type	1 serial link Uni-Telway 19.2 kbit/s 1 Modbus Modbus RTU 19.2 kbit/s
Realtime clock	With
Memory description	Internal RAM 14 Kwords data Flash 15 Kwords data
Maximum size of object areas	256 %Mi 128 %KWi constant words 1 %MWi internal words
Execution time per instruction	0.25 µs Boolean without PCMCIA card 4.81 µs arithmetic REAL floating without PCMCIA card
Execution time for 1 Kinstruction	3.03 100 % Boolean without PCMCIA card 0.25 65 % Boolean and 35 % numerical without PCMCIA card
Application structure	1 master task 8 event tasks 1 fast task
System overhead	1.9 ms master task
Protection type	Short-circuit Overload protection
Total useful secondary power	16 W

Electromagnetic compatibility	Electrostatic discharge IEC 1000-4-2 level 3 Electromagnetic field immunity test IEC 1000-4-3 level 3 Resistance to fast transient IEC 1000-4-4 level 3 Immunity to impulse waves IEC 1000-4-5 Damped oscillatory wave IEC 1000-4-12 Immunity to electromagnetic interference IEC 61131-2
-------------------------------	--

Environment

Ambient air temperature for operation	32...140 °F (0...60 °C)
Ambient air temperature for storage	-13...158 °F (-25...70 °C)
Relative humidity	5...95 % without condensation for operation 10...95 % without condensation for operation
Operating altitude	0...6561.68 ft (0...2000 m)
Width	11.13 in (282.7 mm)
Height	5.94 in (151 mm)
Depth	5.98 in (152 mm)
Product weight	4.01 lb(US) (1.82 kg)

Ordering and shipping details

Category	22556 - TSX MICRO, PL7 MICRO & ACCESS
Discount Schedule	PC14
GTIN	00785901766261
Nbr. of units in pkg.	1
Package weight(Lbs)	3.9500000000000002
Returnability	N
Country of origin	FR


Offer Sustainability

Sustainable offer status	Not Green Premium product
RoHS (date code: YYWW)	Will not be compliant Will not be compliant
REACH	Reference not containing SVHC above the threshold Reference not containing SVHC above the threshold

Contractual warranty


Warranty period	18 months
-----------------	-----------

Dimensions

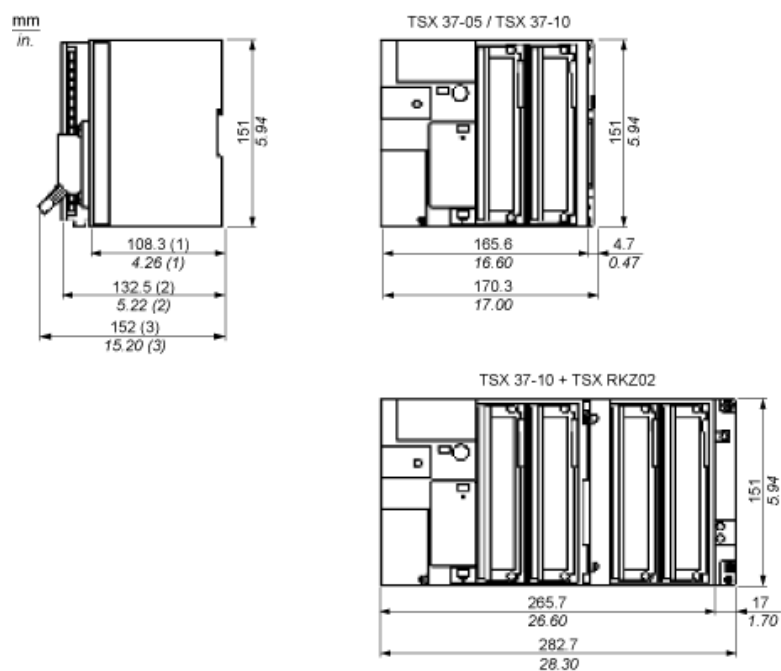


- (1) PLC empty.
- (2) With screw terminal block.
- (3) With HE10 or SubD connector.

Spacing Requirements

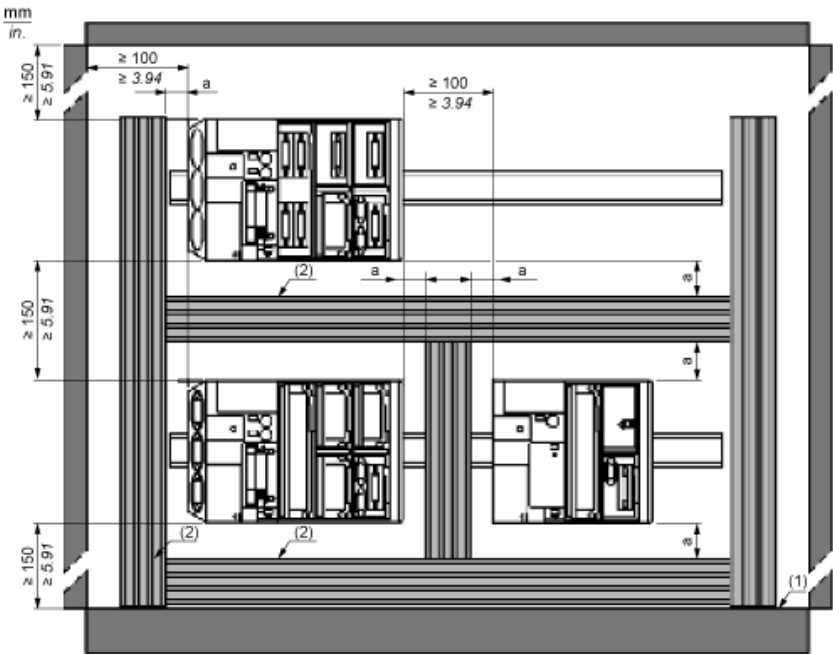

- a 50 mm/1.97 in. minimum
(1) Installation or casing
(2) Trough or cable tray


Panel/Board Mounting

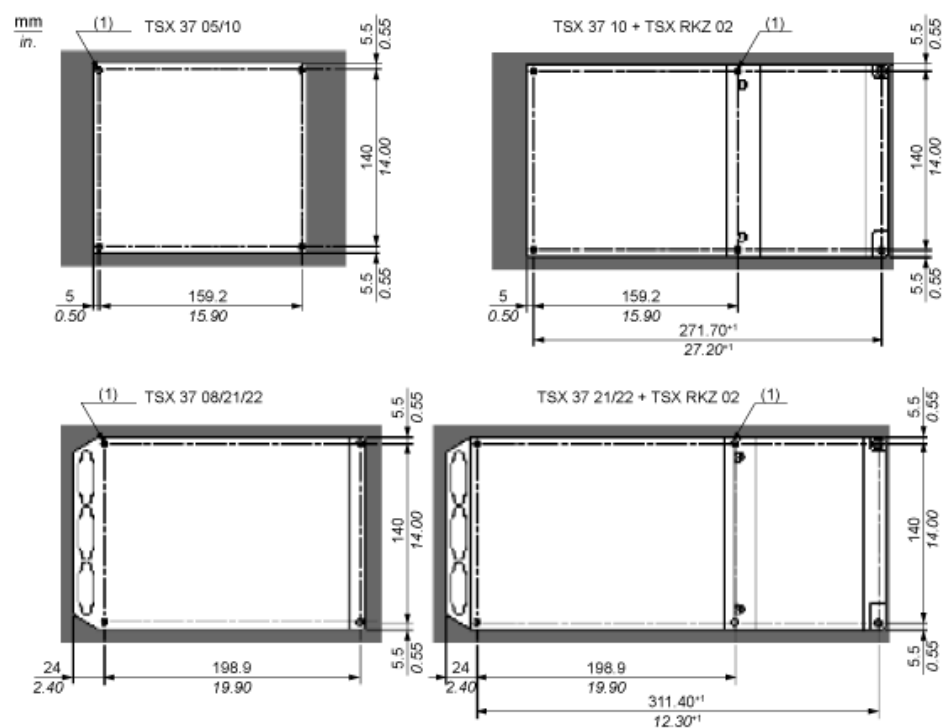

(1) The diameter of the fixing holes must be sufficient to take M4 screws.

Telequick Board Mounting

Side View

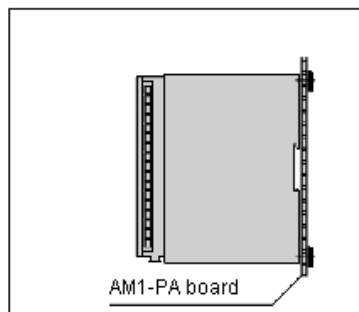

Use 4 screws with M4x16AF1-VA416 captive washers and 4 M4 AF1-EA4 clip nuts.