

# TSXPSY3610M

power supply module - 24 V DC -  $\leq 2700$  mA -  
IP20

Product availability : Stock - Normally stocked in distribution facility

Price\* : 1266.15 USD



## Main

Range of product	Modicon Premium Automation platform
Product or component type	Power supply module

## Complementary

Primary voltage	24 V DC 19.2...30 V
Input current	$\leq 2700$ mA 24 V
Inrush current	150 A 24 V
I <sup>2</sup> t on activation	20 A <sup>2</sup> .s
It on activation	0.5 A.s
Protection type	Overload protection secondary circuit Overvoltage protection secondary circuit Short-circuit protection secondary circuit
Total useful secondary power	50 W
Secondary power	19 W 24 V DC 35 W 5 V DC
Current at secondary voltage	0.6 A 24 V DC relay power supply 7 A 5 V DC
Marking	CE
Local signalling	1 LED green presence of voltages (OK) 1 LED red battery fault (BAT)
Module format	Double
Product weight	1.72 lb(US) (0.78 kg)

## Environment


Immunity to microbreaks	$\leq 1$ ms
Dielectric strength	2000 V primary/earth 2000 V primary/secondary

Standards	CSA C22.2 No 142 89/336/EEC CSA C22.2 No 213 Class I Division 2 Group D IEC 61131-2 CSA C22.2 No 213 Class I Division 2 Group B 92/31/EEC 93/68/EEC UL 508 CSA C22.2 No 213 Class I Division 2 Group C CSA C22.2 No 213 Class I Division 2 Group A 73/23/EEC
Product certifications	RMRS RINA GL ABS LR DNV BV
Ambient air temperature for operation	32...140 °F (0...60 °C)
Ambient air temperature for storage	-13...158 °F (-25...70 °C)
Relative humidity	10...95 % without condensation for operation 5...95 % without condensation for storage
Operating altitude	0...6561.68 ft (0...2000 m)
Protective treatment	TC
IP degree of protection	IP20
Pollution degree	2

### Ordering and shipping details

Category	22558 - TSX PREMIUM, ATRIUM & PL7 PRO
Discount Schedule	PC22
GTIN	00785901870746
Nbr. of units in pkg.	1
Package weight(Lbs)	2.0600000000000001
Returnability	Y
Country of origin	FR

### Offer Sustainability


Sustainable offer status	Not Green Premium product
RoHS (date code: YYWW)	Compliant - since 1001 - Schneider Electric declaration of conformity  <a href="#">Schneider Electric declaration of conformity</a>
REACH	Reference not containing SVHC above the threshold <a href="#">Reference not containing SVHC above the threshold</a>
Product end of life instructions	Need no specific recycling operations

### Contractual warranty

Warranty period	18 months
-----------------	-----------


## Standard and Extendable Racks for Modules Mounting

### Dimensions of Modules and Racks

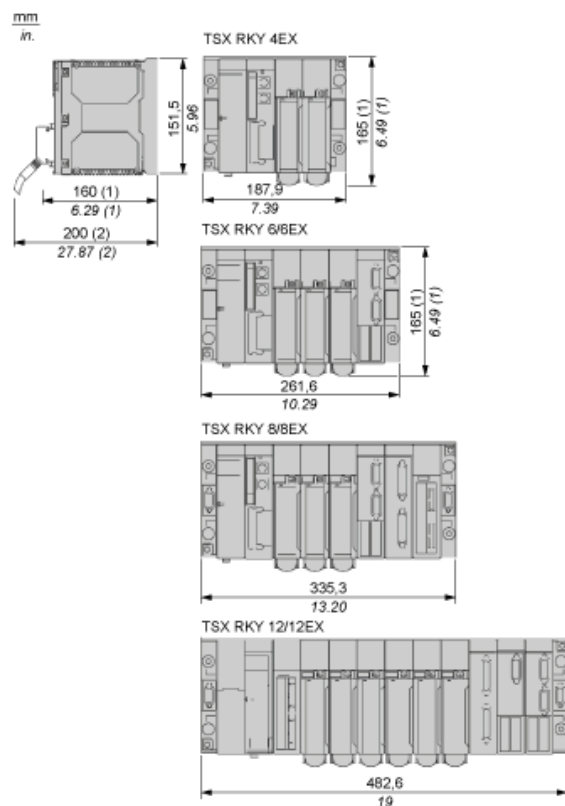

- (1) With screw terminal block modules.  
(2) Maximum depth for all types of modules and their associated connectors.

## Connecting Power Supply Modules

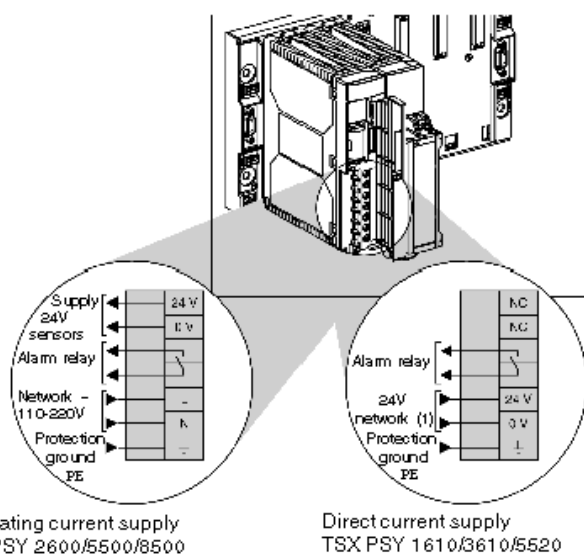

(1) 24...48Vdc for the TSXPSY5520 supply module.

Provide a protection device and a switch gear upstream of the PLC station.