


AS-Interface ClassicLine module with quick mounting technology

ClassicLine 4DI-Y 4DO-Y

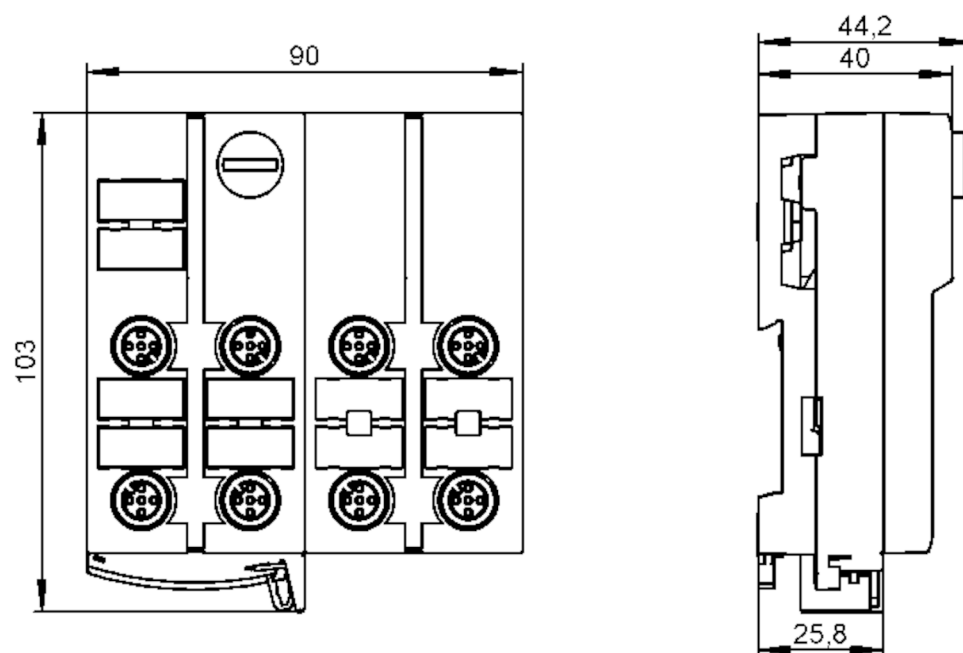

Application

Design	only for operation with AS-i masters with the profile M4
Application	field installation

Electrical data

Operating voltage	[V]	26.5...31.6 DC; ("supply class 2" to cULus)
Max. current consumption from AS-i	[mA]	250
Max. current load total	[A]	4
Integrated watchdog		yes

Inputs / outputs

Number of inputs and outputs	Number of digital inputs: 4; Number of digital outputs: 4
------------------------------	---



AS-Interface ClassicLine module with quick mounting technology

ClassicLine 4DI-Y 4DO-Y

Inputs					
Number of digital inputs	4				
Input circuit of digital inputs	PNP				
Sensor supply of the inputs	AS-i				
Voltage supply [V]	18...30; (via flat cable)				
Max. total current rating of inputs [mA]	200				
Input current High [mA]	6...10				
Input current Low [mA]	0...2				
Min. switching level high signal [V]	11				
Digital inputs protected against short circuits	yes				
Outputs					
Number of digital outputs	4				
Circuit	PNP				
Voltage range DC [V]	15...30; (to PELV; via flat cable)				
Max. current load per output [mA]	2000; (utilisation category DC-13 (control of electromagnets): 40 W (IEC 60947-5-1))				
Short-circuit proof	yes				
Electrically separated	yes				
Actuator supply outputs	AUX				
Operating conditions					
Ambient temperature [°C]	-25...70				
Protection	IP 67				
Tests / approvals					
EMC	EN 50295				
	IEC 61000-6-2				
MTTF [years]	149				
AS-i classification					
AS-i version	3.0				
AS-i addressing	addressing socket				
Extended addressing mode	yes				
AS-i profile	S-7.A.7				
AS-i I/O configuration [hex]	7				
AS-i ID code [hex]	A.7				
AS-i certificate pending	yes				
Assignment of the data bits	data bit	D0	D1	D2	D3
	input	1	2	3	4
	socket	I-1/2	I-1/2 I-2	I-3/4	I-3/4 I-4
	pin	4	2 4	4	2 4
	Output	1	2	3	4
	socket	O-1/2	O-1/2 O2	O-3/4	O-3/4 O-4
	pin	4	2 4	4	2 4



AS-Interface ClassicLine module with quick mounting technology

ClassicLine 4DI-Y 4DO-Y

Mechanical data		
Weight	[g]	310.5
Type of mounting	AS-i flat cables directly connectable	
Materials	PA; piercing contacts: CuSn6 nickel-plated and tin-plated	
Displays / operating elements		
Display	operation	LED, green
	errors	LED, red
	function	LED, yellow
Electrical connection		
AS-i bus connection	Flachkabel	
Accessories		
Items supplied	lower part	
Accessories (optional)	Protective cap: M12, E73004	
Remarks		
Remarks	Inputs and outputs must be electrically isolated.	
	Do not connect any of the following points to an external potential:	
	I-, I+, I1, I2, I3, I4	
	The connections are electrically connected with the AS-i cable.	
Pack quantity	1 pcs.	

AS-Interface ClassicLine module with quick mounting technology


ClassicLine 4DI-Y 4DO-Y

Electrical connection

quick mounting technology for AS-i flat cable: ; three orientations possible

Electrical connection - Inputs

Connection

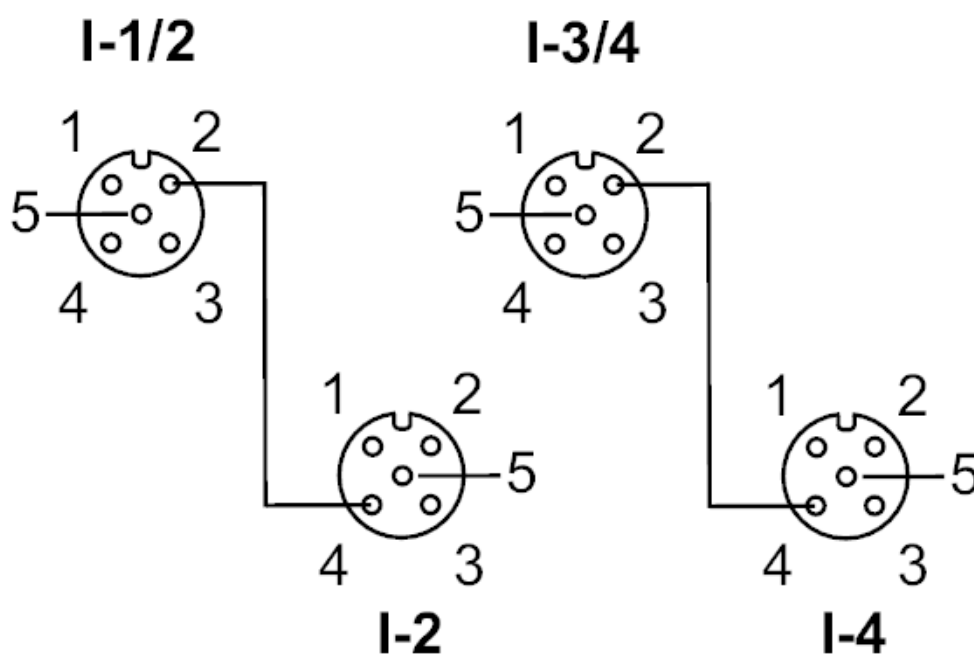


Connector: M12



AS-Interface ClassicLine module with quick mounting technology

ClassicLine 4DI-Y 4DO-Y

Inputs	
socket I-1/2	
1	Sensor supply L+
2	data input 2
3	Sensor supply L-
4	data input 1
5	not used
socket I-2	
1	Sensor supply L+
2	not used
3	Sensor supply L-
4	data input 2
5	not used
socket I-3/4	
1	voltage supply L+
2	data input 4
3	Sensor supply L-
4	data input 3
5	not used
socket I-4	
1	Sensor supply L+
2	not used
3	Sensor supply L-
4	data input 4
5	not used

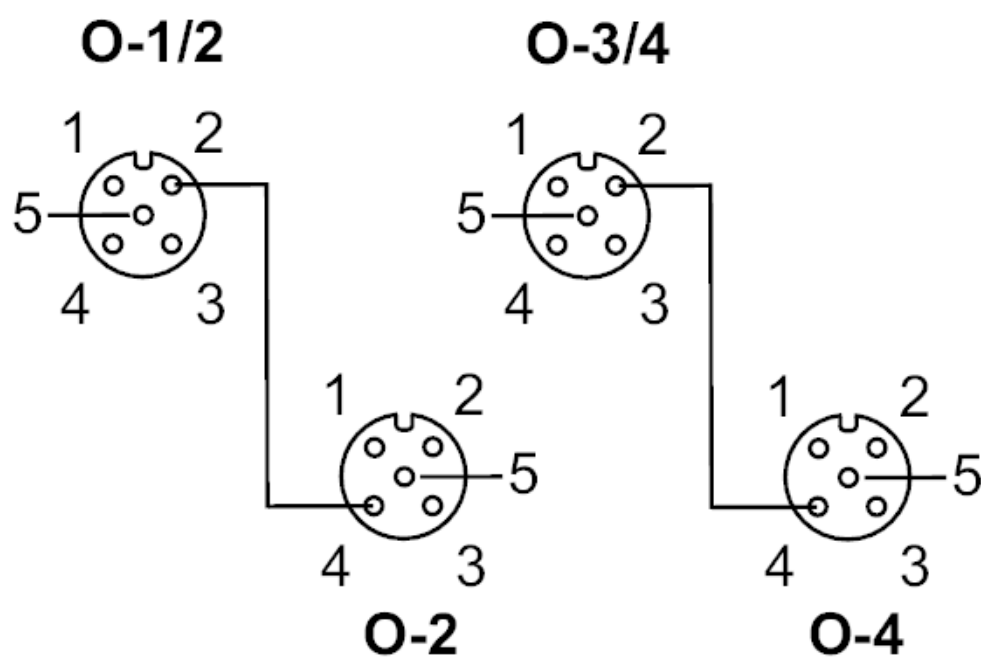

Connector: M12



AS-Interface ClassicLine module with quick mounting technology

ClassicLine 4DI-Y 4DO-Y

Outputs	
socket O-1/2	
1	not used
2	switching output 2
3	external voltage AUX -
4	switching output 1
5	not used
socket O-2	
1	not used
2	not used
3	external voltage AUX -
4	switching output 2
5	not used
socket O-3/4	
1	not used
2	switching output 4
3	external voltage AUX -
4	switching output 3
5	not used
socket O-4	
1	not used
2	not used
3	external voltage AUX -
4	switching output 4
5	not used