


AS-Interface ClassicLine module with quick mounting technology

ClassicLine 4DI-Y AUX 3DO-Y

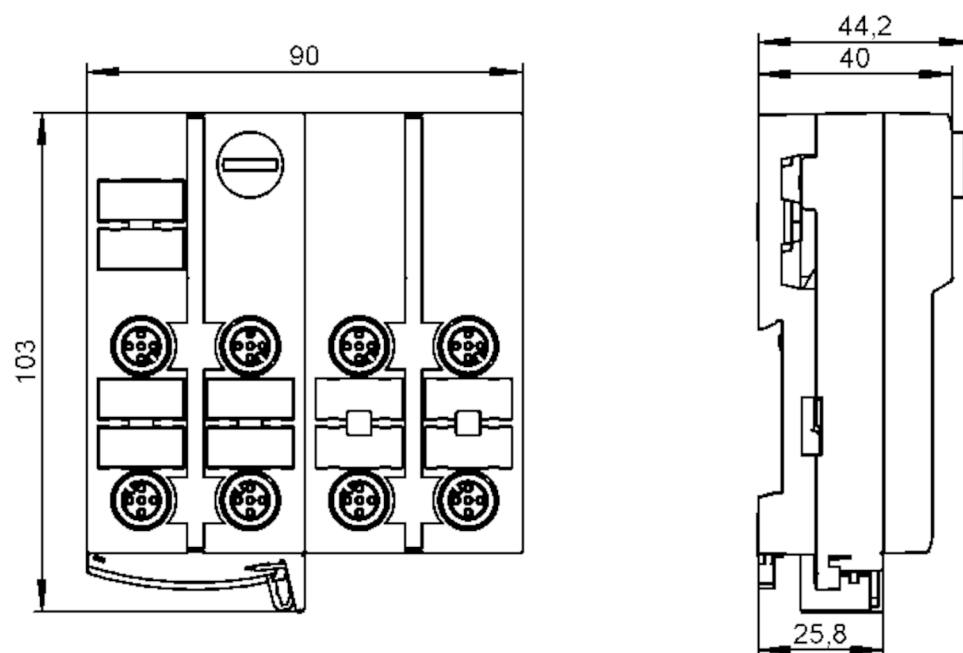

Application

Application	field installation
-------------	--------------------

Electrical data

Operating voltage	[V]	26.5...31.6 DC; ("supply class 2" to cULus)
Max. current consumption from AS-i	[mA]	30
Max. current load total	[A]	3
Integrated watchdog		yes

Inputs / outputs

Number of inputs and outputs	Number of digital inputs: 4; Number of digital outputs: 3
------------------------------	---

Inputs

Number of digital inputs	4
Input circuit of digital inputs	PNP
Sensor supply of the inputs	AUX
Voltage supply [V]	20...30; (via flat cable)
Max. total current rating of inputs [mA]	1000
Input current High [mA]	6...10
Input current Low [mA]	0...2
Min. switching level high signal [V]	11
Digital inputs protected against short circuits	yes



AS-Interface ClassicLine module with quick mounting technology

ClassicLine 4DI-Y AUX 3DO-Y


Outputs						
Number of digital outputs	3					
Circuit	PNP					
Voltage range DC [V]	20...30; (to PELV; via flat cable)					
Max. current load per output [mA]	1000; (utilisation category DC-13 (control of electromagnets): 20 W (IEC 60947-5-1))					
Short-circuit proof	yes					
Electrically separated	yes					
Actuator supply outputs	AUX					
Operating conditions						
Ambient temperature [°C]	-25...70					
Protection	IP 67					
Tests / approvals						
EMC	EN 50295					
	IEC 61000-6-2					
MTTF [years]	166					
AS-i classification						
AS-i version	2.11; 3.0					
AS-i addressing	addressing socket					
Extended addressing mode	yes					
AS-i profile	S-7.A.E					
AS-i I/O configuration [hex]	7					
AS-i ID code [hex]	A.E					
AS-i certificate pending	yes					
Assignment of the data bits	data bit	D0	D1	D2	D3	
	input	1	2	3	4	
	socket	I-1/2	I-1/2 I-2	I-3/4	I-3/4 I-4	
	pin	4	2 4	4	2 4	
	Output	1	2	3	4	
	socket	O-1/2	O-1/2 O2	O-3	-	
	pin	4	2 4	4	-	
Assignment of the parameter bits	parameter bit	Designation				
	P0	not used				
	P1	peripheral fault indication	: 1	activated	* / 0	deactivated
	P2	not used				
	P3	not used				
Mechanical data						
Weight [g]	289.5					
Type of mounting	AS-i flat cables directly connectable					
Materials	PA; piercing contacts: CuSn6 nickel-plated and tin-plated					
Displays / operating elements						
Display	operation			LED, green Voltage AUX > 7 V		
	errors			LED, red AUX 15 V ± 2 V		
	function			LED, yellow		



AS-Interface ClassicLine module with quick mounting technology

ClassicLine 4DI-Y AUX 3DO-Y

Electrical connection	
AS-i bus connection	Flachkabel
Accessories	
Items supplied	lower part
Accessories (optional)	Protective cap: M12, E73004
Remarks	
Pack quantity	1 pcs.
Electrical connection	
quick mounting technology for AS-i flat cable: ; three orientations possible	
Electrical connection - Inputs	
Connection	

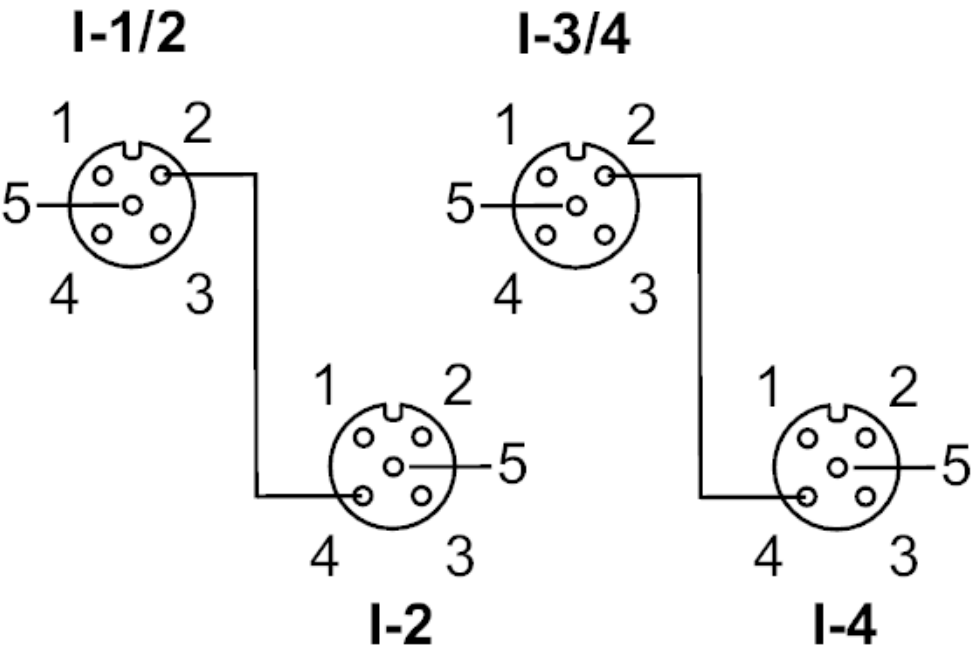

Connector: M12



AS-Interface ClassicLine module with quick mounting technology

ClassicLine 4DI-Y AUX 3DO-Y


Inputs	
socket I-1/2	
1	Sensor supply L+
2	data input 2
3	Sensor supply L-
4	data input 1
5	not used
socket I-2	
1	Sensor supply L+
2	not used
3	Sensor supply L-
4	data input 2
5	not used
socket I-3/4	
1	voltage supply L+
2	data input 4
3	Sensor supply L-
4	data input 3
5	not used
socket I-4	
1	Sensor supply L+
2	not used
3	Sensor supply L-
4	data input 4
5	not used

AS-Interface ClassicLine module with quick mounting technology

ClassicLine 4DI-Y AUX 3DO-Y

Electrical connection - Outputs

Connection

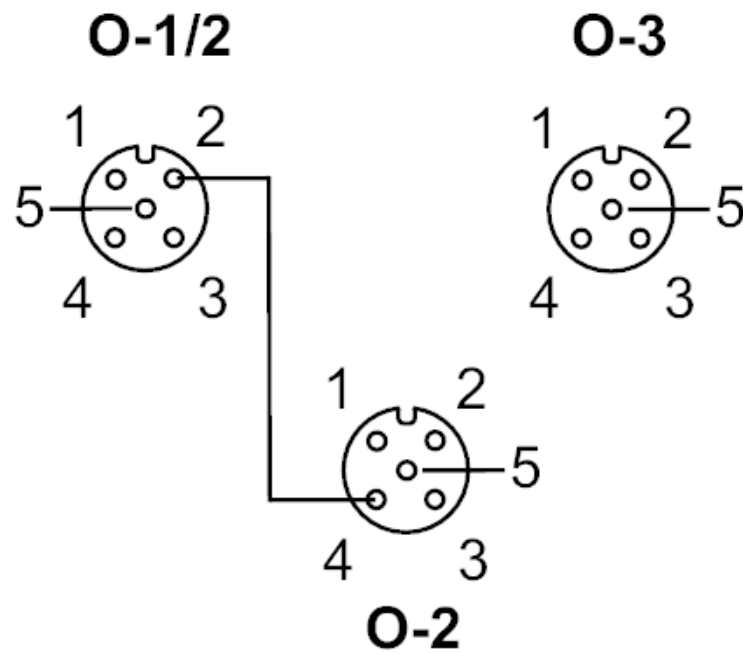

Connector: M12



AS-Interface ClassicLine module with quick mounting technology

ClassicLine 4DI-Y AUX 3DO-Y

Outputs	
	socket O-1/2
1	not used
2	switching output 2
3	external voltage AUX -
4	switching output 1
5	not used
	socket O-2
1	not used
2	not used
3	external voltage AUX -
4	switching output 2
5	not used
	socket O-3
1	not used
2	not used
3	external voltage AUX -
4	switching output 3
5	not used