

# AL1030




## IO-Link master with EtherCAT interface

IO-Link Master PL EC 8P IP67

discontinued article

Alternative articles: AL1332

When selecting an alternative article and accessories please note that technical data may differ!

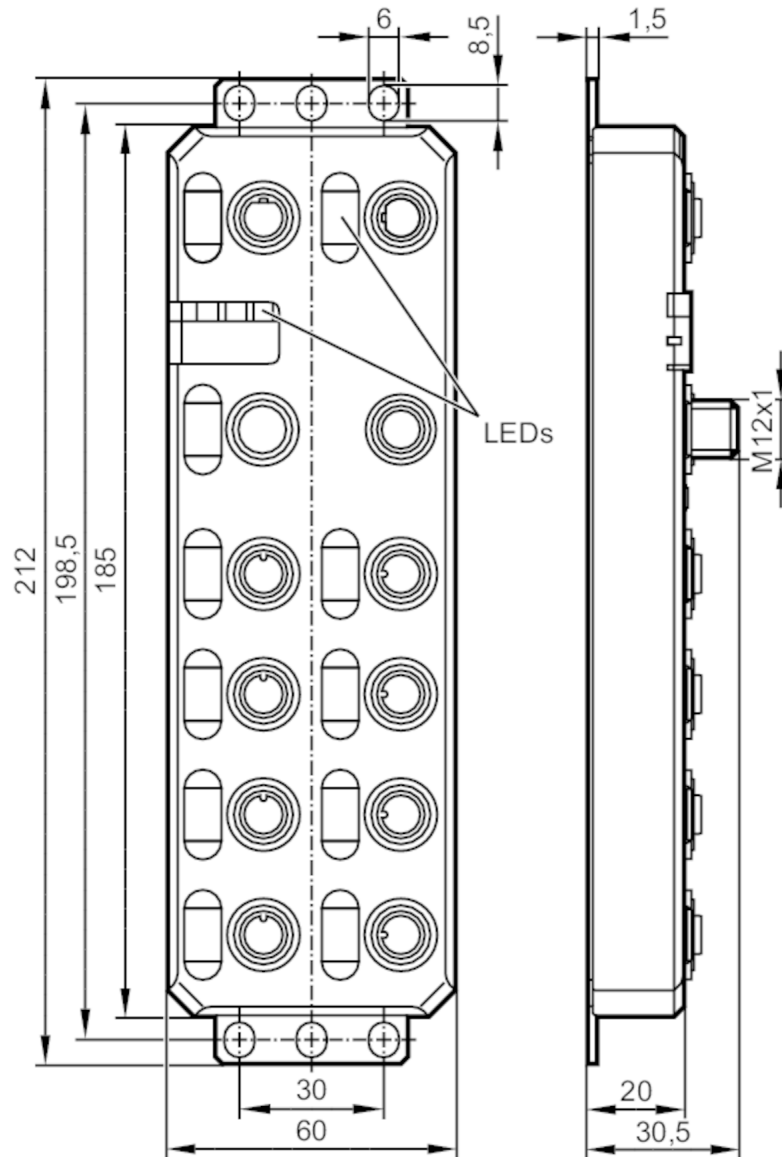

### Application

Application

I/O modules for field applications

Daisy-chain function

voltage supply; fieldbus interface



## IO-Link master with EtherCAT interface

IO-Link Master PL EC 8P IP67

Electrical data	
Operating voltage [V]	19...31.2 DC; (US)
Protection class	III
Additional voltage supply [V]	19...31.2 DC; (UA)
Actuator supply UA	
Current rating per port [A]	1.6
Sensor supply US	
Current rating per port [A]	0.2
Inputs / outputs	
Total number of inputs and outputs	12; (configurable)
Number of inputs and outputs	Number of digital inputs: 12; Number of digital outputs: 8
Inputs	
Number of digital inputs	12; (IO-Link Port Class A: 4 x 2; IO-Link Port Class B: 4 x 1)
Switching level high [V]	15...30
Switching level low [V]	-3...5
Digital inputs protected against short circuits	yes
Outputs	
Number of digital outputs	8; (IO-Link Port Class A: 4 x 1; IO-Link Port Class B: 4 x 1)
Max. current load per output [mA]	200
Short-circuit proof	yes
Interfaces	
Communication interface	Ethernet; IO-Link
Ethernet	
Protocol	EtherCAT
IO-Link Master	
Transmission type	COM1 (4,8 kBaud); COM2 (38,4 kBaud); COM3 (230,4 kBaud)
IO-Link revision	1.1
Number of ports class A	4
Number of ports class B	4
Operating conditions	
Ambient temperature [°C]	-25...60
Storage temperature [°C]	-25...85
Max. relative air humidity [%]	95
Protection	IP 65; IP 67

# AL1030



## IO-Link master with EtherCAT interface

IO-Link Master PL EC 8P IP67

Tests / approvals		
EMC	EN 61000-6-2	
	EN 61000-4-2 ESD	6 kV contact discharge / 8 kV air discharge
	EN 61000-4-3	
	EN 61000-4-4	
	EN 61000-4-5	
	EN 61000-4-6	
Shock resistance	EN 60068-2-27	30 g 11 ms
Vibration resistance	EN 60068-2-6	5 g

Mechanical data		
Weight	[g]	572.5
Materials	housing: PA; socket: brass nickel-plated	
Sealing material	FKM / FKM / FKM	

Remarks		
Remarks	For further information please see the operating instructions.	
Pack quantity	1 pcs.	

### Electrical connection - Ethernet

Connector: M12; Sealing: FKM




### IN / OUT X21, X22

1	TX +
2	RX +
3	TX -
4	RX -
5	not used

### Electrical connection - Process connection

Connector: M12; Sealing: FKM





## IO-Link master with EtherCAT interface

IO-Link Master PL EC 8P IP67

### IO-Link Port Class A X01...X04


1	Sensor supply (US) L+
2	digital input
3	Sensor supply (US) L-
4	C/Q IO-Link
5	not used

### IO-Link Port Class B X05...X08

1	Sensor supply (US) L +
2	actuator supply (UA) L+
3	Sensor supply (US) L-
4	C/Q IO-Link
5	actuator supply (UA) L-

### Electrical connection - voltage supply IN

Connector: M12




### X31

1	+ 24 V DC (US) brown
2	GND (UA) white
3	GND (US) blue
4	+ 24 V DC (UA) black

### Electrical connection - voltage supply OUT

Connector: M12; Sealing: FKM



### X32

1	+ 24 V DC (US) brown
2	GND (UA) white
3	GND (US) blue
4	+ 24 V DC (UA) black