


# E11686



## Bulk cable

CABLE/100M/ PUR/4X0,34/BK

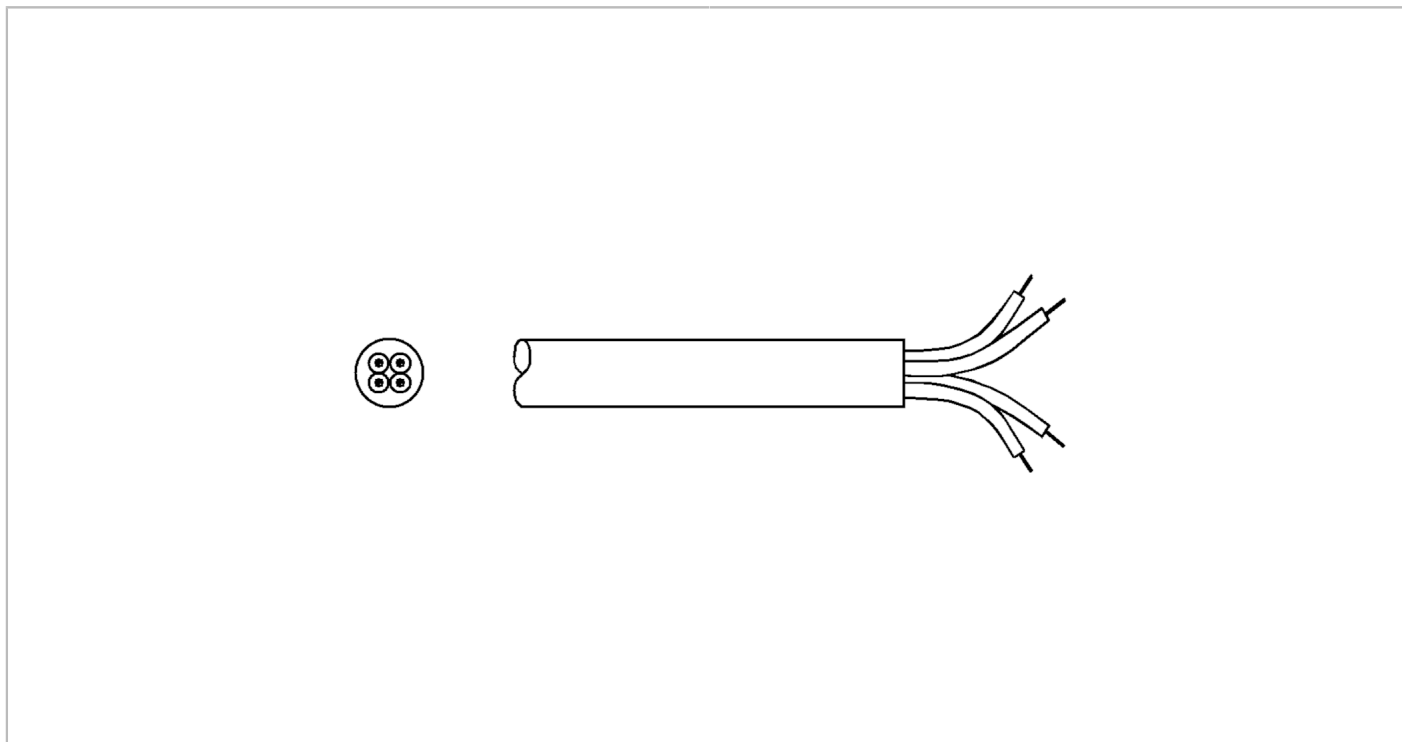

| Application   |                                      |  |
|---|--------------------------------------|--|
| Special feature   | Halogen-free; Drag chain suitability |  |
| Electrical data   |                                      |  |
| Operating voltage [V]   | < 300 AC/DC                          |  |
| Operating conditions  |                                      |  |
| Ambient temperature [°C]  | -40...90                             |  |
| Mechanical data   |                                      |  |
| Weight [g]  | 3127                                 |  |
| Drag chain suitability  | yes                                  |  |
| Drag chain suitability  | bending radius for flexible use      | min. 10 x cable diameter   |
|   | travel speed                         | max. 3.3 m/s for a horizontal travel length of 5 m and max. acceleration of 5 m/s <sup>2</sup> |
|   | bending cycles                       | > 5 Mio.   |
|   | torsional strain                     | ± 180 °/m  |
| Remarks   |                                      |  |
| Pack quantity   | 1 pcs.                               |  |
| Electrical connection   |                                      |  |
| Cable: 100 m, PUR, Halogen-free, black, Ø 4.9 mm; 4 x 0.34 mm <sup>2</sup> , PP |                                      |  |