


# E12385



## Bulk cable

CABLE/100M/ PUR/4X0,34/GR

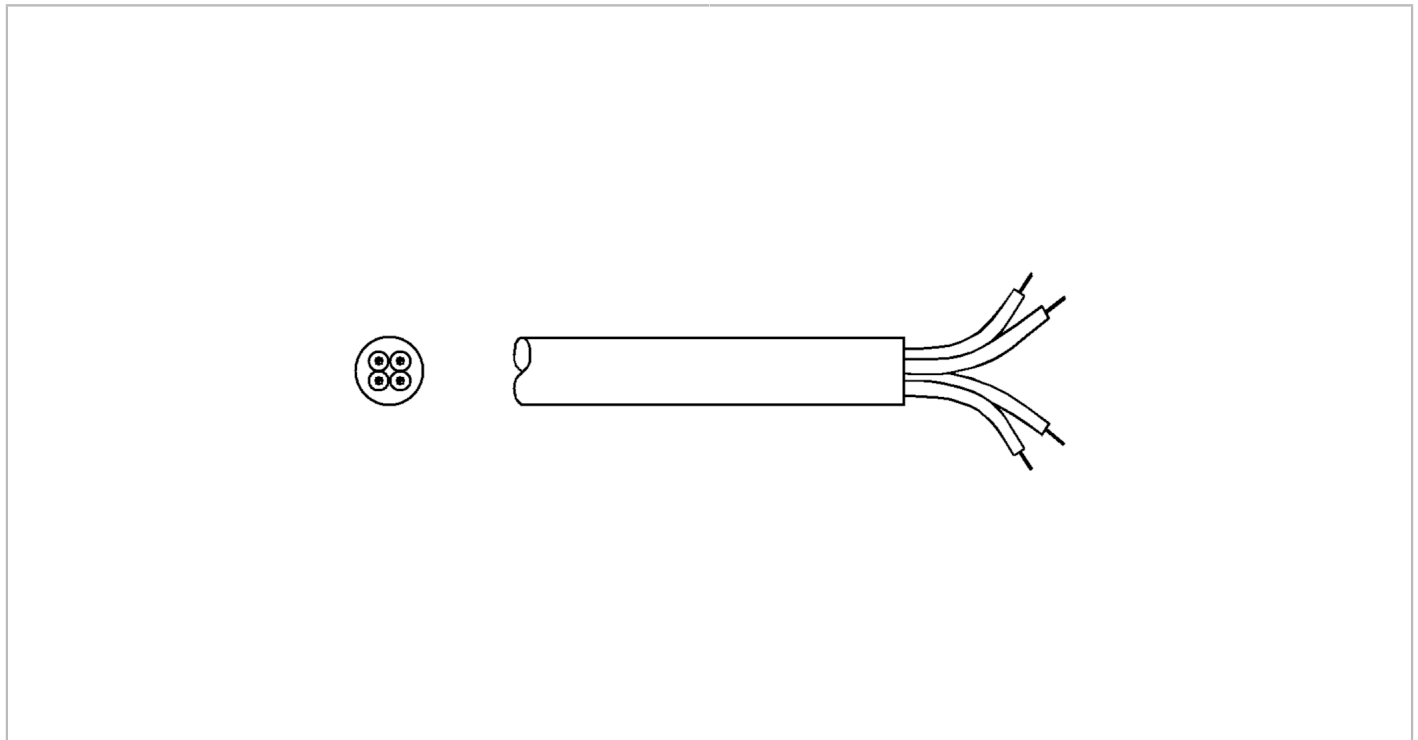

Application		
Special feature	Halogen-free; Drag chain suitability	
Operating conditions		
Ambient temperature [°C]	-40...90	
Note on ambient temperature	cRUUs: ...80 °C	
Ambient temperature (moving) [°C]	-25...90	
Note on ambient temperature (moving)	cRUUs: ...80 °C	
Mechanical data		
Weight [g]	3025	
Drag chain suitability	yes	
Drag chain suitability	bending radius for flexible use	min. 10 x cable diameter
	travel speed	max. 3.3 m/s for a horizontal travel length of 5 m and max. acceleration of 5 m/s <sup>2</sup>
	bending cycles	> 2 Mio.
	torsional strain	± 180 °/m
Remarks		
Pack quantity	1 pcs.	
Electrical connection		
Cable: 100 m, PUR, Halogen-free, grey, Ø 4.9 mm; not irradiated (can be recycled); resistant to welding sparks; 4 x 0.34 mm <sup>2</sup> (42 x Ø 0.1 mm )		