


E12513



Connecting cable with plug

ASTGH040ZDS0020H04

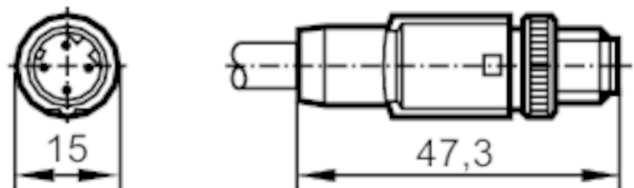

Application	
Special feature	Gold-plated contacts
Design	Ethernet cable, D-coded
Electrical data	
Operating voltage [V]	< 250 AC/DC
Max. current load total [A]	4
Operating conditions	
Ambient temperature [°C]	-40...70
Protection	IP 67
Mechanical data	
Weight [g]	1380.5
Dimensions [mm]	15 x 15 x 47.3
Materials	TPU
Moulded-body material	TPU
Material nut	diecast zinc, nickel-plated
Remarks	
Pack quantity	1 pcs.
Electrical connection	
Cable: 20 m, PVC, green, Ø 6.5 mm; 4 x 0.34 mm²	
Electrical connection - plug	
Connector: 1 x M12, straight; Moulded body: TPU; Locking: diecast zinc, nickel-plated; Contacts: gold-plated; Shielded connection cable: screen connected	

E12513




Connecting cable with plug

ASTGH040ZDS0020H04



Connection

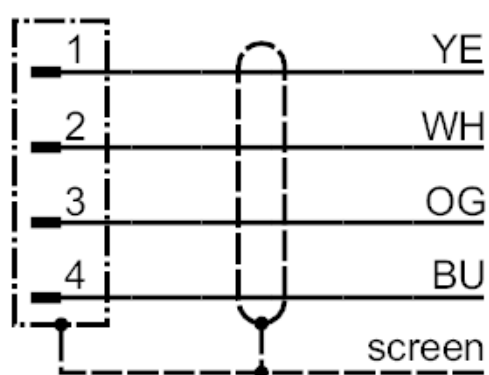

Core colours :

BU =

blue

OG =

orange

WH =

white

YE =

yellow