




Fibre optic diffuse reflection sensor

FT-00-M-E3

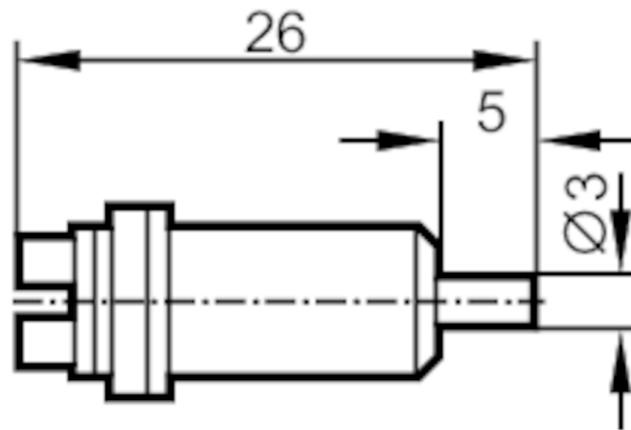

Application

Function principle Diffuse reflection sensor

Detection zone

Range with fibre optic amplifier type OKF; OUF

OKF

Range fibre optics [mm] 40

OUF

Range fibre optics [mm] 40

Operating conditions

Ambient temperature [°C] -20...80

Mechanical data

Weight [g] 12.5

Version of sensing head straight

Sensing head diameter [mm] 3

Total length [mm] 26

Fibre arrangement

Fibre material glass

Fibre head material brass

E20078



Fibre optic diffuse reflection sensor

FT-00-M-E3

Remarks

Pack quantity

1 pcs.