




Fibre optic diffuse reflection sensor

FT-11-EPA-M3/F2X0,5/2M

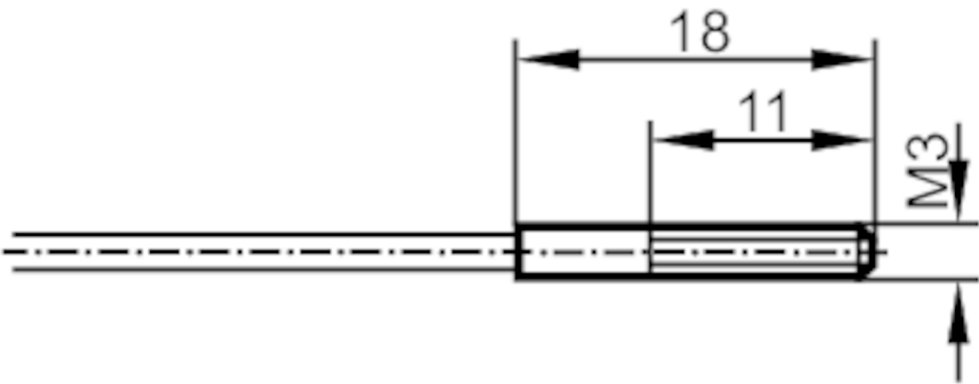

Application		
Function principle		Diffuse reflection sensor
Detection zone		
Range with fibre optic amplifier type		OB50; OBF; OO50
OB50		
Range fibre optics	[mm]	20
OBF		
Range fibre optics	[mm]	25
OO50		
Range fibre optics	[mm]	60
Operating conditions		
Ambient temperature	[°C]	-40...70

E20712



Fibre optic diffuse reflection sensor

FT-11-EPA-M3/F2X0,5/2M

Mechanical data	
Weight [g]	32.5
Version of sensing head	straight
Sensing head thread	M3
Sensing head length [mm]	20
Total length [mm]	2000
Min. bending radius [mm]	10
Fibre arrangement	⊙
Core diameter [mm]	2 x 0.5
Fibre material	PMMA
Fibre head material	aluminium
Fibre sheath material	PE
Accessories	
Items supplied	hexagon nuts: 2 x M3
	tooth lock washers: 2
	Adapter: OBF
	Adapter: OOF
Accessories (optional)	Cutter for fibre optics:, E20600
Remarks	
Pack quantity	1 pcs.