




## Process adapter Tri-Clamp

ADAPT G1-CLAMP ISO2852/1-1.5

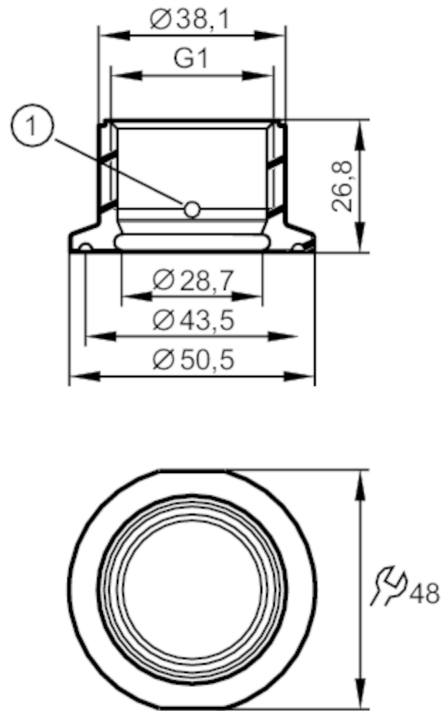

1: Leakage port



EC 1935/2004 FDA

## Application

Pressure rating	[bar]	100
-----------------	-------	-----

## Tests / approvals

Pressure Equipment Directive	A possible classification to PED depends on the application and has to be carried out by the user / operator.
Safety instructions	The compatibility between medium and product material has to be checked in all applications.
	With plant pressures of >16 bar to max. 100 bar: Select suitable components (Verify technical data).
	Make sure that clamp bracket and clamp seal correspond to the pressure range.

## Mechanical data

Weight	[g]	156.5
Materials (wetted parts)	stainless steel (1.4435 / 316L) ; surface characteristics : Ra<0,4 / Rz 4	
Sensor connection	G 1 sealing cone	
Process connection	Clamp DN25...DN40 (1...1,5") DIN 32676 (ISO 2852)	
Sealing	Gasket	
Hygienic equipment class to DIN 11866	H4	

## Accessories

Items supplied	O-ring: 26 x 3, EPDM, FDA compliant, E30438
	O-ring: 26 x 3, FKM, FDA compliant, E30437

## Remarks

Pack quantity	1 pcs.
---------------	--------