


# EC0453



## Prewired jumper with contact housing

R360/Cable/DisplayModules A

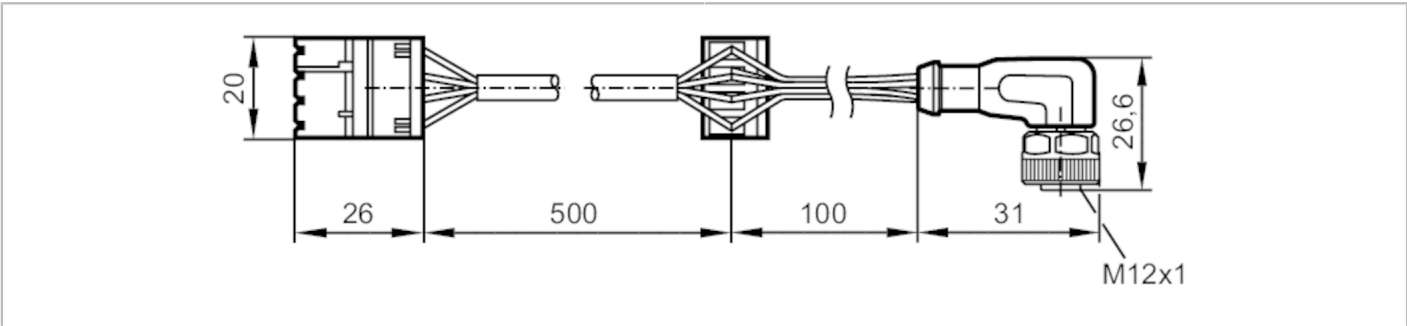

Application		
Design		wired, for BasicController and BasicDisplay, 2 x CR04xx, 1 x CR045x
Application		voltage supply; CAN bus
Operating conditions		
Ambient temperature	[°C]	-40...85
Mechanical data		
Weight	[g]	62.2
Remarks		
Remarks		CAN bus terminating resistor (120 ohms) is integrated in the standard timer contact housing use only sensible in conjunction with cover EC0402
Pack quantity		1 pcs.




## Prewired jumper with contact housing

R360/Cable/DisplayModules A

### Electrical connection

Cable: 0.5 m, PVC, black; 4 x 0.5 mm<sup>2</sup> / AWG 20

### Connection

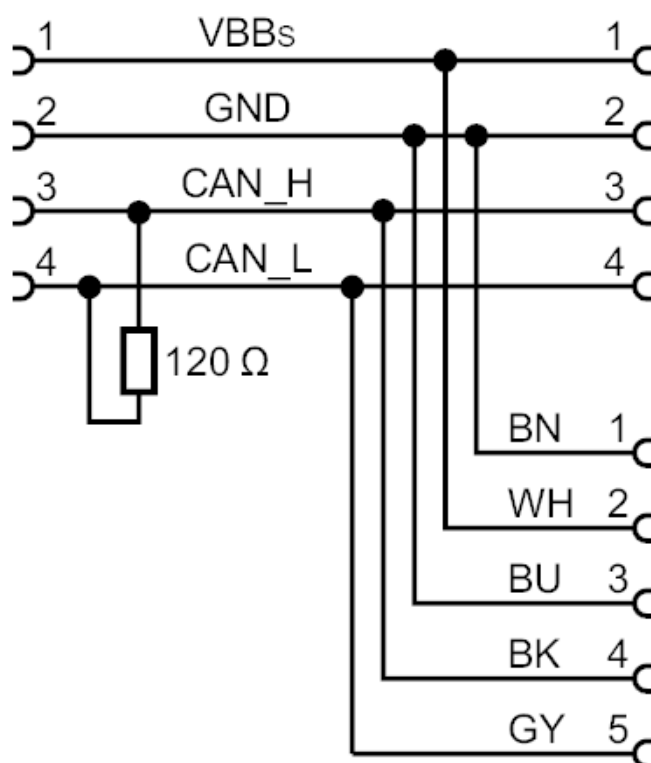

Core colours :

BK =	black
BN =	brown
BU =	blue
GY =	grey
WH =	white