DMS Series - Digital MEMS Inclinometer



Making Sense out of Motion...

The model DMS is a mid-level performance digital MEMS inclinometer for industrial applications. Standard units are available in RS232, RS485 and UART TTL interface options. All DMS series inclinometers are rated IP67 for waterproofing up to 1m. Custom ranges and output types are also available on request.


Features & Benefits:

- Single-Axis and Dual-axis Available
- Resolution: 0.01°
- Zero Temperature Coefficient: ±0.01°/°C
- -40° to +85°C Operation and Storage
- RS232, RS485 & UART TTL Outputs
- 1m cable whip included

Applications:

- Boom Position and Control
- Radar and Vehicle Platform Positioning
- Industrial Measurement and Control
- Drilling Equipment
- Navigation Pitch/Roll Measurement
- Railway Track Alignment & Maintentance

Outline Diagram

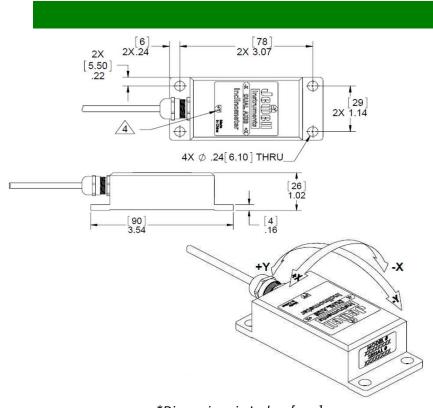

*Dimensions in Inches [mm]

Wiring Code

Wire	Function		
Red	+VDC 9V~36V		
White or Yellow	RS232 (Rx), RS485 (D+)		
Green	RS232 (Tx), RS485 (D-)		
Black	Ground		



Making Sense out of Motion...

Performance Specifications

STATIC/DYNAMIC


Angular Range, °	±10°	±30°	±60°	±90°	
Resolution, °	0.01	0.01	0.01	0.01	
Hysteresis, °	0.02	0.05	0.08	0.1	
Zero Offset Tolerance (°)	0.56	0.56	0.56	0.56	
Zero Temperature Coefficient, (°/°C)	±0.01	±0.01	±0.01	±0.01	
Scale Factor Tolerance (%)	0.7	1.4	2.8	3	
Scale Factor Temperature Coefficient, (ppm/°C)	≤200	≤200	≤200	≤200	
Warm up, s	0.5	0.5	0.5	0.5	
Time Constant, s	0.05	0.05	0.05	0.05	

FLECTRICAL AND ENVIRONMENTAL

Notes: * - Custom ranges available, please see model number structure below.

Specifications subject to change without notice on account of continued product development.



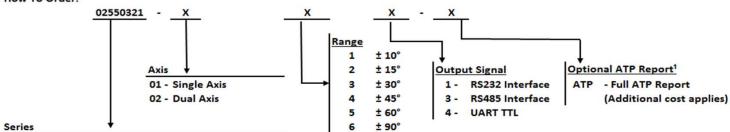

DMS - Digital MEMS Inclinometer

(Resolution: 0.01° & Zero Temp Drift: ±0.006°)

Example:

02550321-0131-ATP

DMS Single Axis, +/- 30 degrees, RS232 Interface, Full ATP Report

1 - Note: "ATP" must be added to the end of the part number for a full ATP report. An additional cost will apply. ATP Report Includes: Scale Factor, Axis Misalignment, Bias, Linearity, Input Current.