
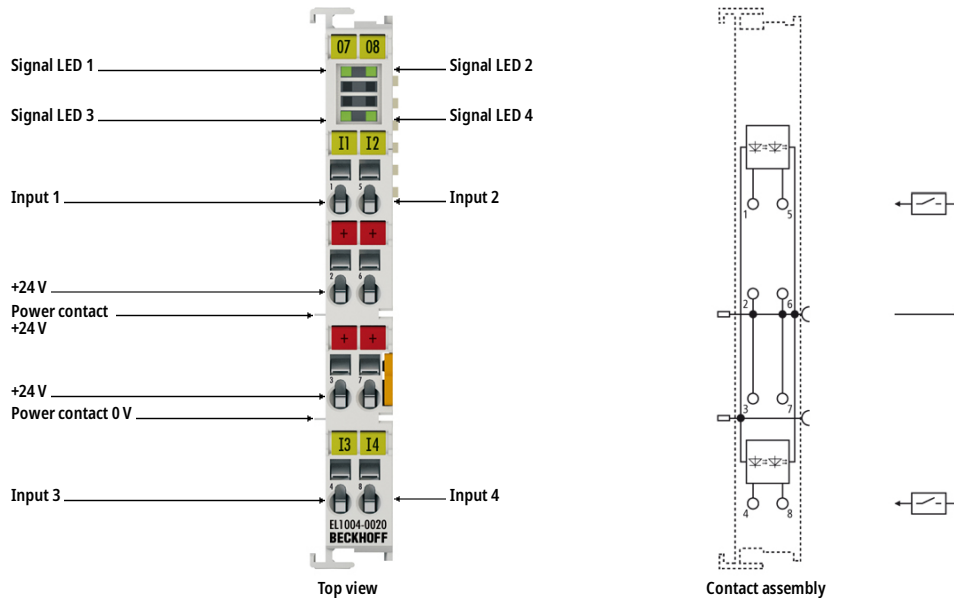


EL1004-0020 | EtherCAT Terminal, 4-channel digital input, 24 V DC, 3 ms, isolation voltage 2500 V DC



i Product status: Regular delivery

The EL1004-0020 digital input terminal acquires the binary 24 V control signals from the process level and transmits them, in an electrically isolated form, to the higher-level automation unit. The EtherCAT Terminal has four channels that indicate their signal state via light emitting diodes.

Special features:

- input specification type 1/3
- no bouncing due to mechanical switches thanks to 3 ms input filter
- direct connection of four 2-wire sensors via additional +24 V connection points
- electrical isolation of 2500 V (functional isolation) between test voltage on the E-bus and field voltage

Product information

Technical Data

Technical data	EL1004-0020
Connection technology	2-wire
Specification	EN 61131-2, type 1/3
Number of inputs	4
Nominal voltage	24 V DC (-15 %/+20 %)
"0" signal voltage	-3...+5 V (EN 61131-2, type 3)

"1" signal voltage	11...30 V (EN 61131-2, type 3)
Input current	typ. 3 mA (EN 61131-2, type 3)
Input filter	typ. 3.0 ms
Distributed clocks	–
Current consumption power contacts	typ. 2 mA + load
Current consumption E-bus	typ. 90 mA
Electrical isolation	2500 V (E-bus/field potential)
Configuration	no address or configuration setting
Special features	Isolation voltage 2500 V DC (E-bus/field voltage)
Weight	approx. 50 g
Operating/storage temperature	0...+55 °C/-25...+85 °C
Relative humidity	95 %, no condensation
Vibration/shock resistance	conforms to EN 60068-2-6/EN 60068-2-27
EMC immunity/emission	conforms to EN 61000-6-2/EN 61000-6-4
Protect. rating/installation pos.	IP20/variable
Approvals/markings	CE, UL

Housing data	EL-12-8pin
Design form	compact terminal housing with signal LEDs
Material	polycarbonate
Dimensions (W x H x D)	12 mm x 100 mm x 68 mm
Installation	on 35 mm DIN rail, conforming to EN 60715 with lock
Side by side mounting by means of	double slot and key connection
Marking	labeling of the BZxxx series
Wiring	solid conductor (e), flexible conductor (f) and ferrule (a): spring actuation by screwdriver
Connection cross-section	s*: 0.08...2.5 mm ² , st*: 0.08...2.5 mm ² , f*: 0.14...1.5 mm ²
Connection cross-section AWG	s*: AWG 28...14, st*: AWG 28...14, f*: AWG 26...16
Stripping length	8...9 mm
Current load power contacts	I _{max} : 10 A

*s: solid wire; st: stranded wire; f: with ferrule